ข้อมูลผลิตภัณฑ์

เครื่องดูดกรองละอองน้ำมัน NOM 4

เครื่องดูดกรองละอองน้ำมันสำหรับเครื่อง CNC



This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

เครื่องดูดกรองละอองน้ำมัน NOM 4

- ค่าใช้จ่ายในการบำรุงรักษาต่ำ
- ทำความสะอาดด้วยการใช้น้ำชะล้างคราบน้ำมันจากแผ่นกรอง
- สะดวกในการติดตั้ง
- ประสิทธิภาพการกรองสูง
- ได้รับการออกแบบเพื่อให้เหมาะสมต่อพื้นที่การใช้งานที่จำกัด

NOM 4 เป็นตัวกรองละอองน้ำมันรูปแบบกะทัดรัด เหมาะสำหรับตู้ซีเอ็นซีเครื่องเดียว ตัวเครื่องติดตั้งง่ายและให้ความยืดหยุ่น โดยปกติจะติดตั้งที่ด้านบนของเครื่องจักร NOM 4 เหมาะสำหรับสารอิมัลชัน

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

เครื่องดูดกรองละอองน้ำมัน NOM 4

[ProductCertifications]	CE
[ProductNoiselevel]	ระดับเสียง 66.1 เดซิเบล
[ProductProtectionclass]	IP 55
[ProductFilterefficiency]	97.5
[ProductInstallation]	ในอาคาร
[ProductMaterial]	Housing ใช้ระบบสีที่ทนทานต่อน้ำมัน
[ProductSuitableForCombustableDust]	False
[ProductMaterialrecycling]	69 (of weight)
[ProductFilterArea]	3
[ProductCapacityMax]	400
[ProductOperatingTemperature]	5 - 60 C
[ItemFrequency]	50
[ItemFilterType]	ไส้กรองแบบตลับ
[ItemNbrofFilterElements]	1
[ItemWeight]	29
[ItemPower]	0,37

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB


รุ่น

	เลขที่สินค้า	[ItemPowerVoltage]	[ItemNoofphases]	[ItemAmperage]
	12610368	230	1	3,15
	12610468[1]	230	1	3,15
	12610568	400/230	3	1,0/1,75
	12610668[1]	400/230	3	1,0/1,75


[1] Inludes HEPA filter with 5,5 m2 filterarea and with 99,97% efficiency.


This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

อุปกรณ์เสริม

	อุปกรณ์เสริม	เลขที่สินค้า
	Prefilter NOM 4 3m2	12373653
	HEPA 5,5m2 NOM 4	12373645
	Wall bracket.	10504035
	FMS 1-1.6 Fan Manual Starter	14502137
	FMS 2.5-4 Fan Manual Starter	14502337
	Drip tray NOM 4	12373657
	Machine stand NOM 4	12373705
	Pressure garge kit NOM 4	12373656


This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

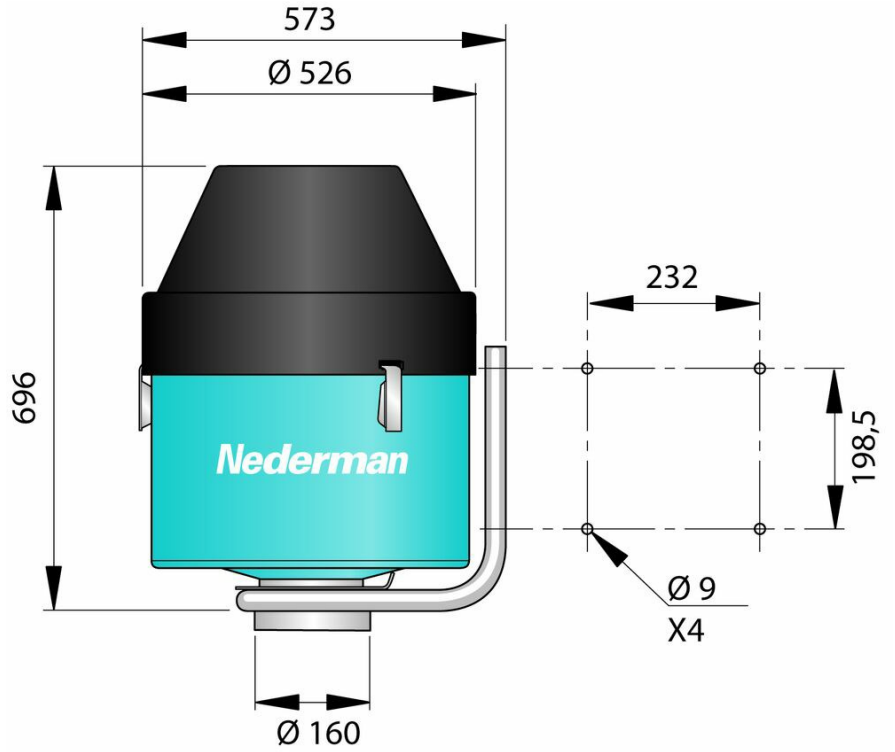

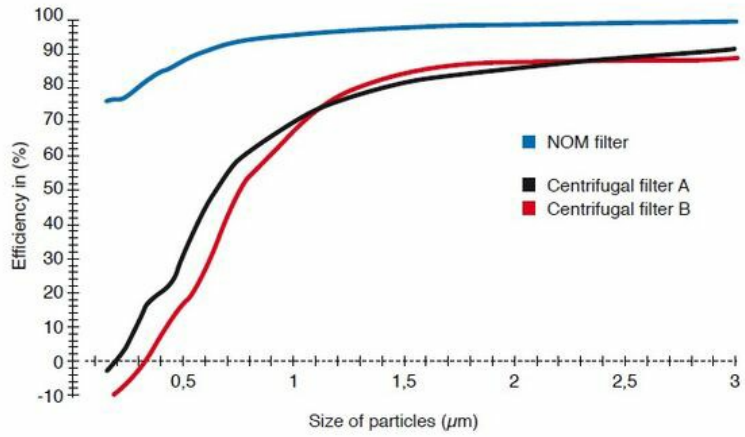

Efficiency of the mainfilter for NOM, compared with typical centrifugal filters, tested with DOP

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

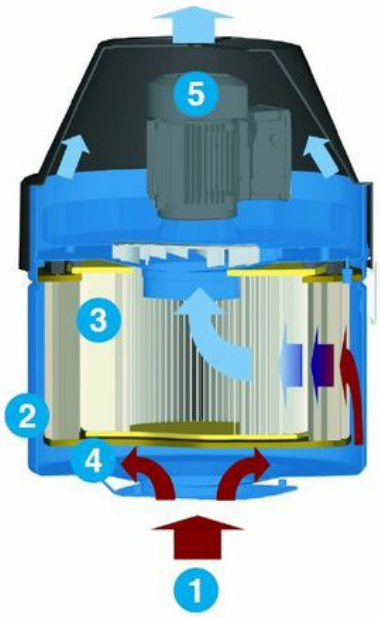

1. *The contaminated air from the process is drawn into the lower chamber.*
2. *The pre-filter separates most of the largest particles and has a self-draining function, and therefore becomes saturated with oil which means that the filter can handle large amounts of emulsion. The pre-filter is washable. Filtration efficiency >97,5% for oilmist.*
3. *The HEPA filter meets the demands from authorities on efficient cleaning. All NOM filters can therefore be equipped with HEPA filter. The HEPA filter is not washable.*
4. *Return drainage pipe. The oil is drained back to a collecting tank or to the machine.*
5. *Integrated fan*

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB