

216 A

大容量粉尘抽排和收集



This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-06-11

1/6

Nederman

216 A

216 A

- ✓ 旋风预分离
- ✓ 手动清洗滤芯可延长滤芯使用寿命

✓ 高吸尘性能

216空气动力工业吸尘器是一个强大的干式工业吸尘器, 适合复合材料处理工业、建筑和建筑工业和处理粉末及其他干燥材料如粉尘、沙砾和颗粒的化学工业。便携式除尘器可以配备高效微粒过滤器。

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-06-11

2/6

Nederman

216 A

216 A

证书	CE
噪音水平(分贝)	74
安装	室内
材料	外壳为金属套管
清灰方式	反吹风清灰
应用	粉尘, 颗粒物, 沙砾
灰斗容量	47
胶管长度(米)	7.5
过滤面积(平方米)	1.56

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB









2026-06-11

3/6

Nederman

216 A

模型

	项目编号	滤芯数量	软管类型	[ItemCompressedAirRequirement]	[ItemMaxAirFlow]	[ItemNoiselevel]	[ItemMaxVaccum]	[ItemHVBHoseLength]	[ItemHVBHoseDiameter]
	42121603 ^[1]	2	PE/C	3,0 Nm ³ /min	342	75,5	-52	7,5	51
	42121605 ^[1]	1	PE/C	1,6 Nm ³ /min	342	74,0	-31	7,5	51
	42121607 ^[1]	1	PE/C	2,2 Nm ³ /min	360	73,5	-42	7,5	51
	42121615	1	PE/C	2,2 Nm ³ /min	360	73,5	-42	7,5	51
	42121621	2	PE/C	1,6 Nm ³ /min	342	74,0	-31	7,5	51
	42121628 ^[2]	1	PU12	5,3 Nm ³ /min	318	75,0	-78	7,5	51
	42121681	1	[W]	1,6 Nm ³ /min	342	74,0	-31		
	42121683	1	[W]	3,0 Nm ³ /min	342	75,5	-52		

项目编号	滤芯数量	软管类型	[ItemCompressedAirRequirement]	[ItemMaxAirFlow]	[ItemNoiselevel]	[ItemMaxVaccum]	[ItemHWHoseLength]	[ItemHWHoseDiameter]
42121684	1	[W]	5,3 Nm ³ /min	318	75.0	-78		
42121692	1		1,6 Nm ³ /min	342	74.0	-31		

[1] With cleaning set, brush, conical and toothed nozzle
[2] With abrasion plate.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-06-11

4/6






Nederman


216 A

软管类型

软管类型	描述	温度范围, 摄氏度	管尾接头, 输送软管	管尾接头, 进气软管	盘管器, 输送软管	盘管器, 进气软管
PU12	适用于磨料、透明聚氨酯, 嵌入钢螺旋钢筋	-40 deg. C. - +90 Deg. C.				
PEC	清洗应用, 最大真空50 kPa, 电导率 < 10 ⁻⁶ 欧姆	-40°C - +60°C				

配件

配件	项目编号
 控制器	43220001
 控制器 用于NE 22-76	43220026
 控制器 用于NE 86-96	43222008
 Plastic bag S50 - 25pcs w/hole	43650102
 Plastic bag S50 - 25pcs 630x800 w/h	43650103

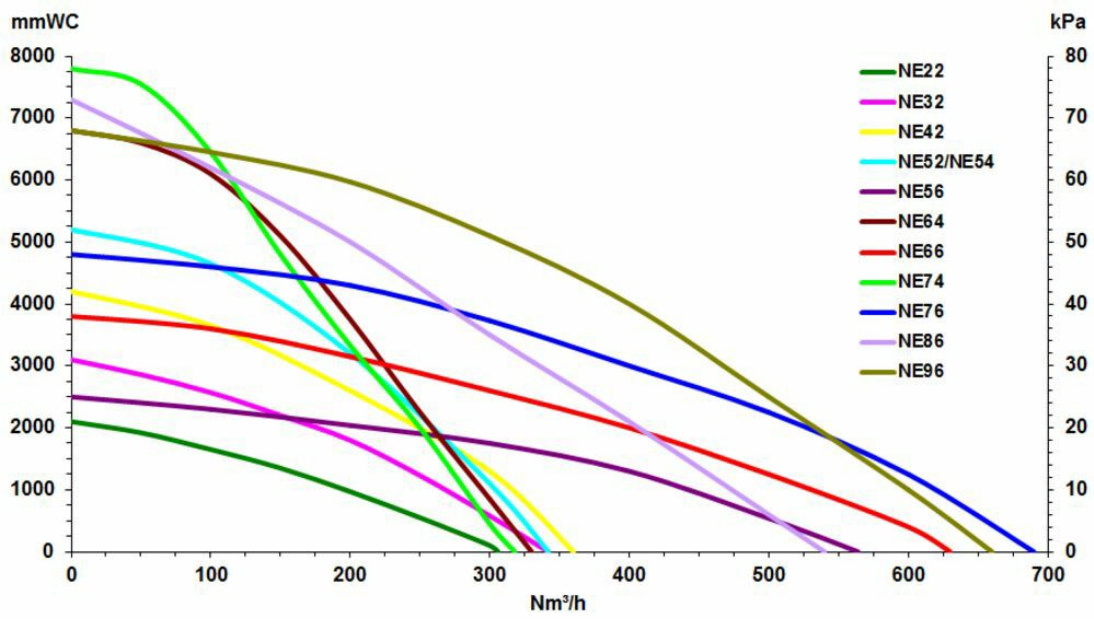

Air Powered ejectors All performance data are based on 7 bar supply pressure

