Product leaflet

Exhaust Hose NFC-6.5

Extreme high temperature hose

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Exhaust Hose NFC-6.5

- Asbestos- and silicon-free high-temperature fabric.
- Temperature range: Continuous use: +650 °C. Short-term use: +750 °C.

Specifically designed to be flexible and ductile, and to have a very low pressure drop. They are resistant to all chemicals in diesel and petrol exhaust fumes, and show high resistance to mechanical stress.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Exhaust Hose NFC-6.5

Certifications	CE

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item no	Type of hose	Diameter, hose (mm)	Hose length (m)
	20824462	NFC-6,5	150	2,5
	20824562	NFC-6,5	150	5
	20824662	NFC-6,5	200	5
	20824762	NFC-6,5	200	2,5

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item no
	Rubber sleeve, hose clamp 6"NFC-2,2pc	20376476
	Hose coupling 150 (6")	20948810
	Hose coupling 200 (8")	20948910
	Quick coupling D=150 (6") female	20948310
	Quick coupling D=150 (6") male	20947910
	Bend 6".	20344593
	Rubber sleeve, hose clamp Ø200	20373838
	Hose suspension DN 150	20373609
	Connector 6"-5". steel.	20344353
	Junction pipe d=160	20371413
	Safety coupling ø100 (4")	20373797
	Hose Suspension DN 125	20373608
	Hose suspension DN 100	20373607

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item no
	Safety coupling ø150 (6")	20373798

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

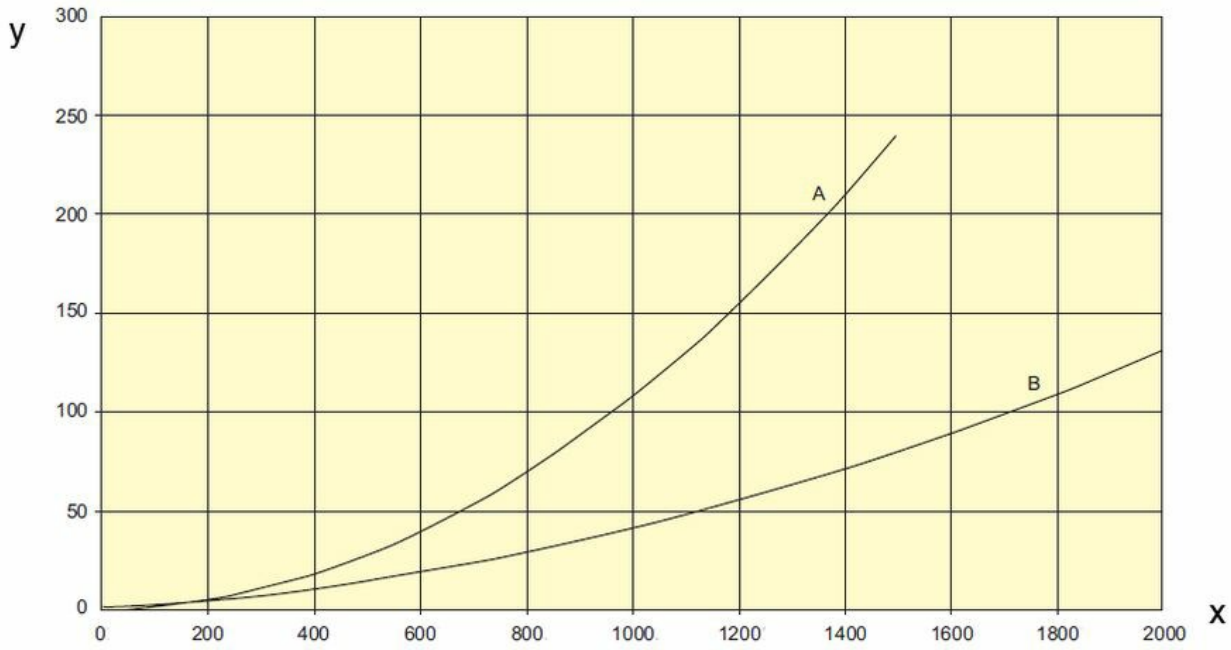

Y = Pressure drop Pa/m X = Airflow m3/h A= Ø150 mm (8") straight B= Ø200 mm (8") straight

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB