Product leaflet

# Magna Track LS

Eksosavtrekk for utrykningsstasjoner med mindre frekvens

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

# Magna Track LS

- Capacity: 1 vehicle per system
- Exhaust pipes: low level tail pipes
- Normal exit speed up to 5 km/h - 3 mph
- For reverse-in (or drive-through)
- Optional automatic start/stop device that offers: - Practical control of fan start/stop - Safe control of air quality (source ventilation automatically starts when vehicle engine starts) - Simple programming - Approval for radio equipment acc. to EC directives, FCC (USA) and IC (Canada)

Magnatrack LS er designet for stasjoner med mindre frekvens. De fritthengende avtrekksslangene støttes av en balanseringsenhet med tralle, som beveger seg i et spor. Et mekanisk frakoplingssystem hjelper å frigjøre enheten fra bilen i en smidig prosess, noe som minimere stress på bilens eksosrøret og minimere belastningen på eksosslangen og takbeslaget. Magnatrack LS er tilgjengelig i lengdene 6 og 9 m (20 og 30 fot), og passer biler med lave monterte eksosrør. Systemet bruker ikke noen elektriske komponenter.
Kapasitet: 1 bil per system
Eksosrør: low level eksosrør
Normal exit-hastighet opptil 5 km / t - 3 mph For rygging (eller 'drive-through')
Valgfri automatisk start/stopp-enhet som tilbyr:
-Praktisk styring av viftestart/stopp

-Sikker kontroll av luftkvalitet (kildeventilasjon starter automatisk når kjøretøyets motor starter)

-Enkel programmering

-Godkjenning for radioutstyr iht. EU-direktivene, FCC (USA) og IC (Canada)

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

# Magna Track LS

| | |
|---|---|
| Sertifiseringer | CE |

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

# Models

| | Item number | Slangediamenter (mm) | Slangelengde (m) |
|---|---|---|---|
| | 20808864[1] | 125 | 5 |
| | 20809064[1] | 125 | 6 |
| | 20809164[1] | 125 | 7,5 |

[1] Inklusive - Aluminiumspor (1),monteringsbraketter for 2.4 m avstand (2),gummistopper (3),glideblokk (4),balanseblokk (5),svivel (6),slangetilkobling,eksosslange (7),nedre munnstykke (8),elektromagnetisk montering (9),forankringsplate (10)

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

# Accessories

| | Accessory | Item number |
|---|---|---|
| | Forankringsplate for magnatrack. | 20372003 |
| | Radiosender,kjøretøy GHz | 20376723 |
| | Radiomottaker GHz | 20376724 |
| | Håndholdt radiosender GHz | 20376725 |
| | Programsett for radiosystem | 20376726 |
| | Slangebeskyttelse ø130/160 (par) | 20374428 |
| | MagnaSystem-munnstykke STD | 20802164 |
| | MagnaSystem-munnstykke HB 600 | 20802264 |
| | MagnaSystem-munnstykke HB 900 | 20802464 |
| | MagnaSystem-munnstykke HB 600 | 20802364 |
| | Vristøtte,HL-munnstykke (16) | 20374364 |
|  | Forlengelsesskaft,HL-munnstykke (17) | 20374359 |

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

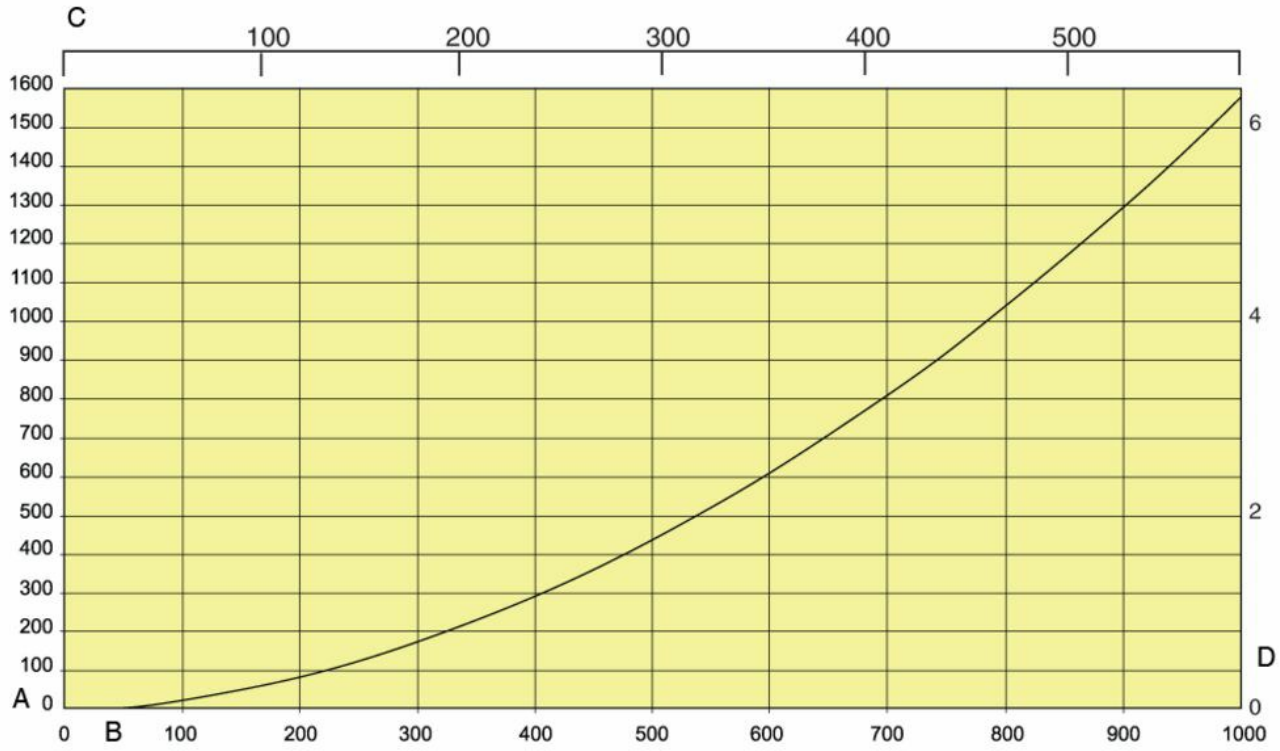


A: Pressure drop (Pa) B: Airflow (m3/h) C: Airflow (cfm) D: Pressure drop (in. w.c.) Pressure drop valid for 6 and 7m track with 5 m hose Ø125mm and HB 600LL nozzle Airflow recommendations: Heavy vehicles: 1000 - 1200 m3/h Car / SUV: 400 - 600 m3/h

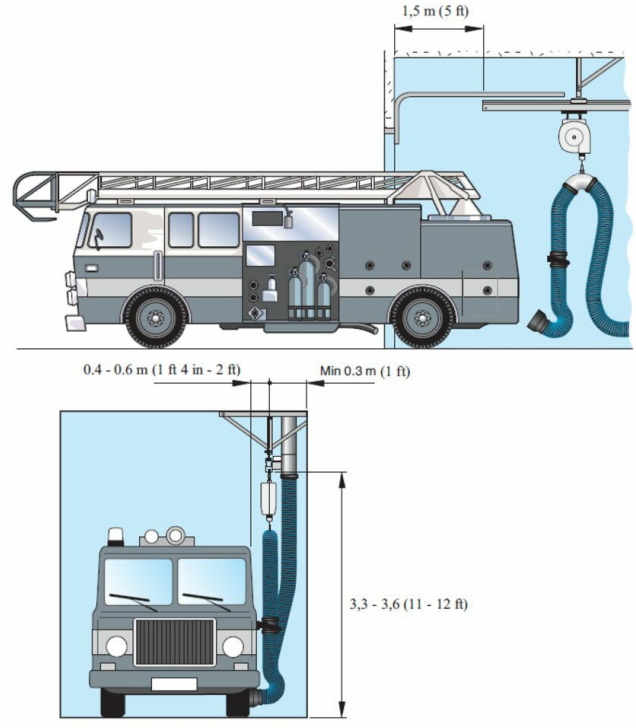


This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB