Product leaflet

Industrial vacuum cleaner 306 E

Wet/dry vacuum cleaner with separator for material and liquid extraction

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Industrial vacuum cleaner 306 E

- Easy to empty with tippable container.
- High mobility and great for handling industrial spillage.
- Liquid recovery – wet and dry extraction.

With a pre-separator container this wet/dry vacuum extractor is designed for extraction, collection and separation of liquids, sand, and other granules. The industrial vacuum cleaner 306E is electric powered and is suitable for wet and dry extraction. This dry/wet vacuum contains two filtration stages that ensure optimum cleaning efficiency. Suction equipment is strong and durable, suitable for building and construction industry and turning and general industries. The wet/dry vacuum containers can be easily tilted to empty their materials. The float ball prevent the first container from overfilling. The trolley is equipped with large wheels for ease of mobility.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Industrial vacuum cleaner 306 E

Certifications	CE
Protection class	IP44
Installation	Outdoor, Indoor
Application	Liquid, Granulate, Swarf
Dustbin volume (l)	40 + 47 l
Max Airflow (m3/h)	460
Filter Area (m²)	0,35
Power voltage (V)	230
Filter type	[bag]
Number of filter elements	1
Filter material	Polyester-Teflon
Type of hose	PE/C
Max airflow (m³/h)	460
Noise level (dB(A))	75
Max vacuum (kPa)	-21,5
Hose length (m)	7,5
Hose diameter (mm)	51
Power (kW)	2,4

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item no	Frequency (Hz)	No of phases	Electric plug
	42430605[1]	50/60		
	42430606[2]	50	1	Euro (CEE 7/2 P+E)

[1] Radio interference supression. With cleaning set, gulper head, scraping tool, brush and conical nozzle.
[2] Radio interference supression. With cleaning set

Hose types

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PEC	For cleaning applications Max vacuum 50 kPa Conductivity < 10^6 Ohm	-40°C - +60°C				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

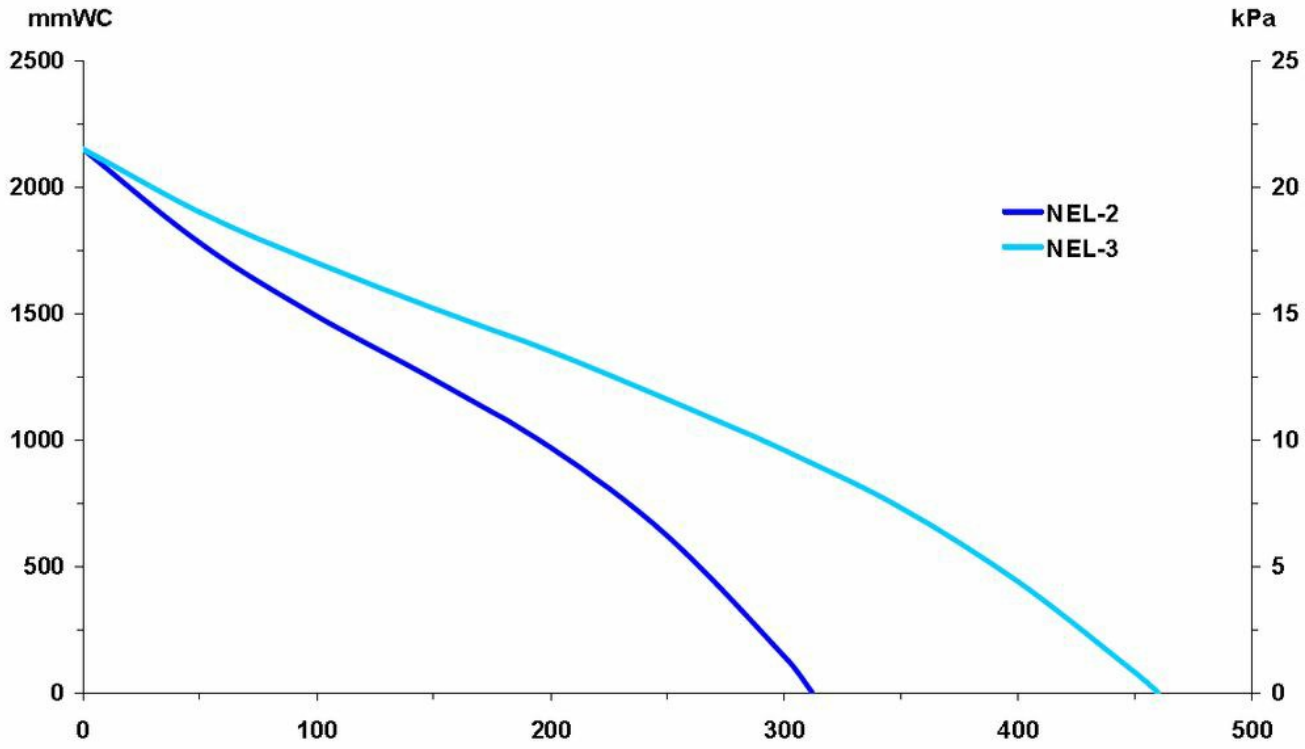

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB