

Industrial vacuum cleaner 570 A

portable dust collector for granulate extraction



This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-01-16

1/6

Industrial vacuum cleaner 570 A

- ✓ Silo system with large wheels
- ✓ Forklift slots

The 570A portable dust collector has high suction capacity. A dry vacuum designed for the collection of dusty materials and granules, such as steel grit, sand, coarse powders and other dusty materials. This is a powerful dust collector, excellent high vacuum for suction over long horizontal and vertical distance.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-01-16

2/6

Nederman

Industrial vacuum cleaner 570 A

Industrial vacuum cleaner 570 A

[ProductCertifications]	[ce]
[ProductInstallation]	[Outdoor], [Indoor]
Filter cleaning method	[ReverseAirPulse]
[ProductApplication]	[dust], [granulate], [grit]
Dustbin volume (l)	146
[ProductFilterArea]	3,15 or 5,25 depending on model (NCF) 0,59 (bag)
Filter type	[NCF]
Number of filter elements	70
Weight (kg)	203

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB






2026-01-16

3/6

Nederman

Industrial vacuum cleaner 570 A

Models




	Item no	Type of hose	Max airflow (m³/h)	Max vacuum (kPa)	Hose length (m)	Hose diameter (mm)
	42157011 ^[1]	PU12	318	-78	20	63
	42157047 ^[1]	PU12	690	-48	20	63
	42157049 ^[1]	PU12	660	-68	10	63
	42157086 ^[1]	Without	660	-68		
	42157087 ^[1]	PU12	330	-68	20	63


^[1] With floor cleaning equipment

Hose types

Hose type	[HoseSpecification]	[HoseTemperatureRange]	[HoseFittingDistribution]	[HoseFittingInlet]	[HoseConnectionDistribution]	[HoseConnectionInlet]
PU12	Sturdy hose. Suitable for abrasive material Transparent polyurethane (t=1,2 mm) Reinforced with inbedded steel helix	- 40 deg. C. - + 90 Deg. C.				

Accessories

	Accessory	Item no
	Control S for NE 22-76	43220001
	Control S for NE 22-76, wo/control box	43220026
	Control S for NE86-96, wo/control box	43222008

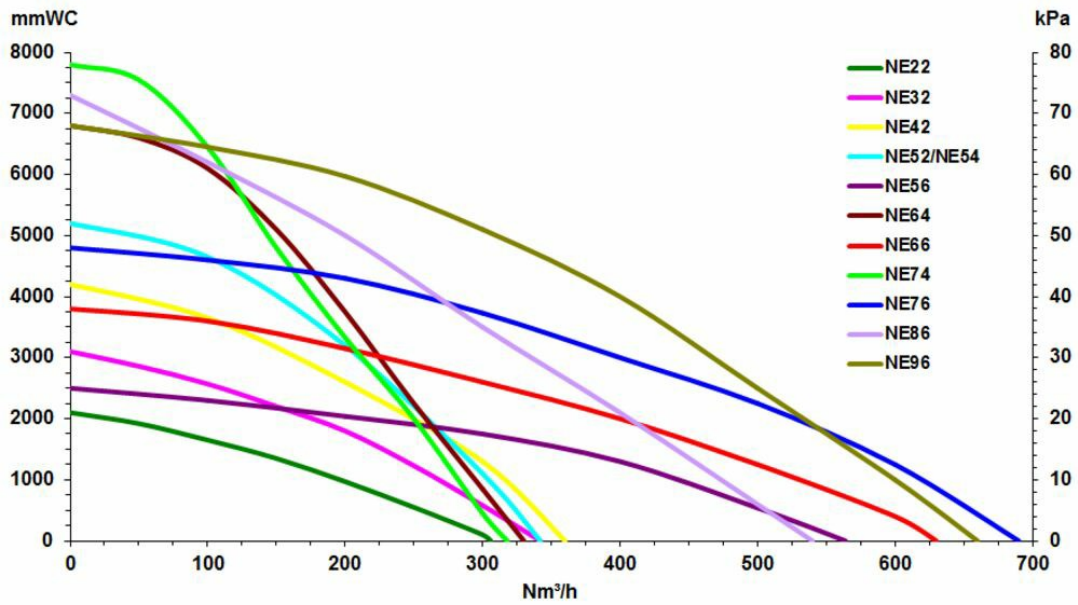

Air Powered ejectors All performance data are based on 7 bar supply pressure