

# 600A

Stationary multi-purpose dust collector



# 600A

- ✓ Vacuum unit with silo on flexible frame system
- ✓ High vacuum for suction of heavyweight material over long distance

Silo system with high suction capacity for fixed installations. Designed for the collection of dusty materials such as granules, steel grit and recovery of precious metals. The silo is equipped with a manual discharge valve. Can be supplied with counterweight or pneumatic valves for automatic operations. Equipped with the efficient and self-cleaning NCF (candle) filter (not all models). The unit can be fitted with automatic remote control. The unit is often used as power pack in central suction systems

---

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-06-11

2/6

**Nederman**

600A

# 600A

---

[ProductCertifications]

[ce]

---

[ProductInstallation]

[Outdoor], [Indoor]

---

|                               |                                      |
|-------------------------------|--------------------------------------|
| [ProductFiltercleaningMethod] | [ReverseAirPulse]                    |
| [ProductApplication]          | [dust], [granulate], [grit], [swarf] |
| [ProductDustbinvolume]        | 146                                  |
| [ItemFilterType]              | [NCF]                                |
| [ItemNbrofFilterElements]     | 70                                   |
| [ItemWeight]                  | 144                                  |

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB



2026-06-11

3/6

**Nederman**

600A

## Models

|  | Item no                 | [ItemTypeofhose] | [ItemMaxAirFlow] | [ItemMaxVaccum] | [ItemHVBHoseLength] | [ItemHVBHoseDiameter] | [ItemDeliveredWithHose] |
|--|-------------------------|------------------|------------------|-----------------|---------------------|-----------------------|-------------------------|
|  | 42160000 <sup>[1]</sup> | PU12             | 330              | -68             | 10                  | 63                    |                         |
|  | 42160081                | Without          | 690              | -48             |                     |                       | [Without]               |

<sup>[1]</sup> With cleaning set, gulper head and scraping tool

# Hose types

| Hose type | Specification  | Temperature range, °C       | Hose fittings in free hose end, distribution hose | Hose fitting on free hose end, inlet hose | Hose connection on reel, distribution hose | Hose connection on reel, inlet hose |
|-----------|--|-----------------------------|---|---|--|-------------------------------------|
| PU12      | Sturdy hose. Suitable for abrasive material<br>Transparent polyurethane (t=1,2 mm)<br>Reinforced with inbedded steel helix | - 40 deg. C. - + 90 Deg. C. |   |   |  |                                     |

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB




2026-06-11

4/6

**Nederman**



600A


## Accessories

|   | Accessory                              | Item no  |
|---|--|----------|
|  | Control S for NE 22-76                 | 43220001 |
|  | Control S for NE 22-76, wo/control box | 43220026 |
|  | Control S for NE86-96, wo/control box  | 43220008 |

**Nederman**

600A

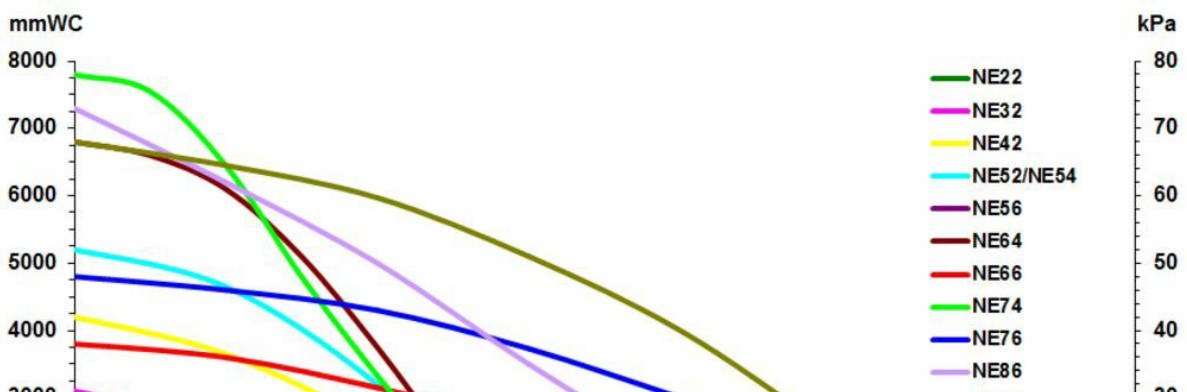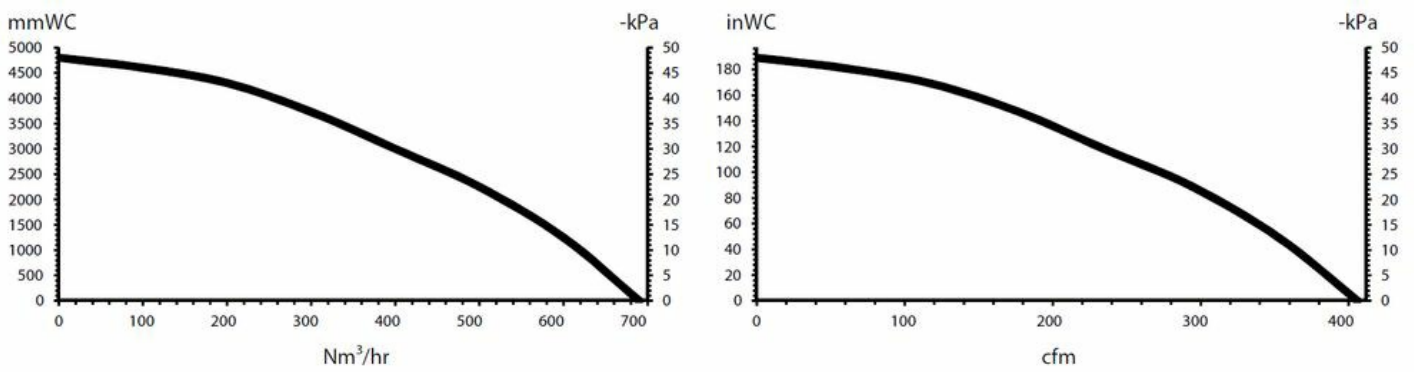

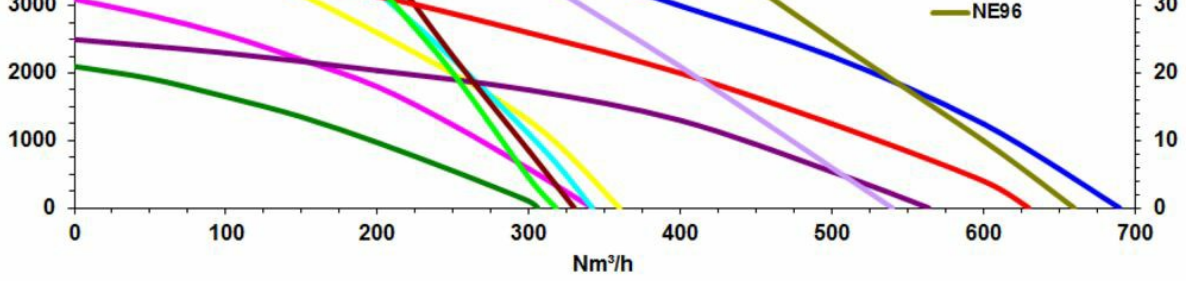

Air Powered ejectors All performance data are based on 7 bar supply pressure