

# Industrial vacuum cleaner 105 A

Air powered or pneumatic dry vacuum cleaner with light suction equipment for cleaning floors, walls, beams, and the like.



This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-01-16

1/6

## Industrial vacuum cleaner 105 A

- ✓ Simple and robust dry vacuum
- ✓ Vacuum comes with disposable dust bag

Air powered or pneumatic industrial dry vacuum cleaner with light suction equipment for cleaning floors, walls, beams, and the like. The dust collector is a simple and robust system with capacity superior to most of the portable vacuums on the market.

The industrial vacuum cleaner comes with disposable dust bag. The vacuum is suitable for composite handling industry, building and construction industry, general industry handling dry materials such as powder, grit and granules. Also available in an ATEX certified version for combustible dusts.

---

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-01-16

2/6

**Nederman**

Industrial vacuum cleaner 105 A

## Industrial vacuum cleaner 105 A

[ProductCertifications]	[ce]
Filter type	[cartridge]
Weight (kg)	67

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB




2026-01-16

3/6

**Nederman**

Industrial vacuum cleaner 105 A

## Models

	Item no	Number of filter elements	Type of hose	Max airflow (m <sup>3</sup> /h)	Max vacuum (kPa)	Hose length (m)	Hose diameter (mm)
	42110500 <sup>[1]</sup>	1	PE/C	306	-21	7,5	51
	42110513 <sup>[2]</sup>	2	Without	318	-78		
	42110516 <sup>[1]</sup>	1	PE/C	342	-31	7,5	51




<sup>[1]</sup> With cleaning set, brush, conical and toothed nozzle


<sup>[2]</sup> No accessories

## Hose types

Hose type	[HoseSpecification]	[HoseTemperatureRange]	[HoseFittingDistribution]	[HoseFittingInlet]	[HoseConnectionDistribution]	[HoseConnectionInlet]
PEC	For cleaning applications Max vacuum 50 kPa Conductivity 10 <sup>^3</sup> to 10 <sup>^6</sup> Ohm/m	-40°C - +60°C				

## Accessories

	Accessory	Item no
	Control S for NE 22-76	43220001
	Control S for NE 22-76, wo/control box	43220026
	Control S for NE86-96, wo/control box	43222008

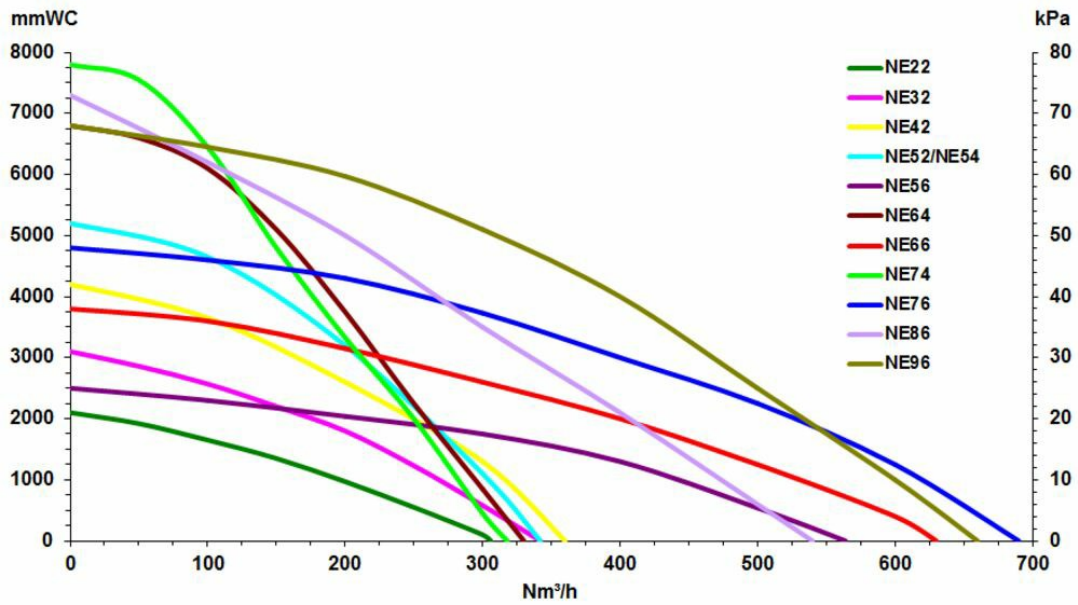

Air Powered ejectors All performance data are based on 7 bar supply pressure