Product leaflet

Industrial vacuum cleaner 106 A

Industrial vacuum cleaner for removal of non-flammable liquids and granules

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Industrial vacuum cleaner 106 A

- Comes with NE 32 powerhead
- Wet & Dry cleaning
- Vacuuming capacity
- Easy handling
- Bottom discharge optional

A high capacity vacuum unit for suction and transportation of various non-flammable liquids like oil, chemicals, mud, cooling liquids and water, as well as metal chips, sand, and other granules. The standard version vacuum unit can fill the container with liquids in a minute or two. Suction equipment is made for heavy duty work. The container is mounted to the trolley by brackets.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Industrial vacuum cleaner 106 A

Certifications	[ce]
Filter type	[bag]

Number of filter elements	1
Type of hose	PVC
Max airflow (m³/h)	342
Max vacuum (kPa)	-31
Hose length (m)	7,5
Hose diameter (mm)	51

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item no
	42110600[1]

[1] With cleaning set, brush, conical and toothed nozzle

Hose types

Hose type	[HoseSpecification]	[HoseTemperatureRange]	[HoseFittingDistribution]	[HoseFittingInlet]	[HoseConnectionDistribution]	[HoseConnectionInlet]
PVC	Max vacuum 84 kPA Inner bending radius 60 mm Reinforced with inbedded steel helix	- 20 deg. C. to + 70 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item no
	Control S for NE 22-76	43220001
	Control S for NE 22-76, wo/control box	43220026
	Control S for NE86-96, wo/control box	43222008

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

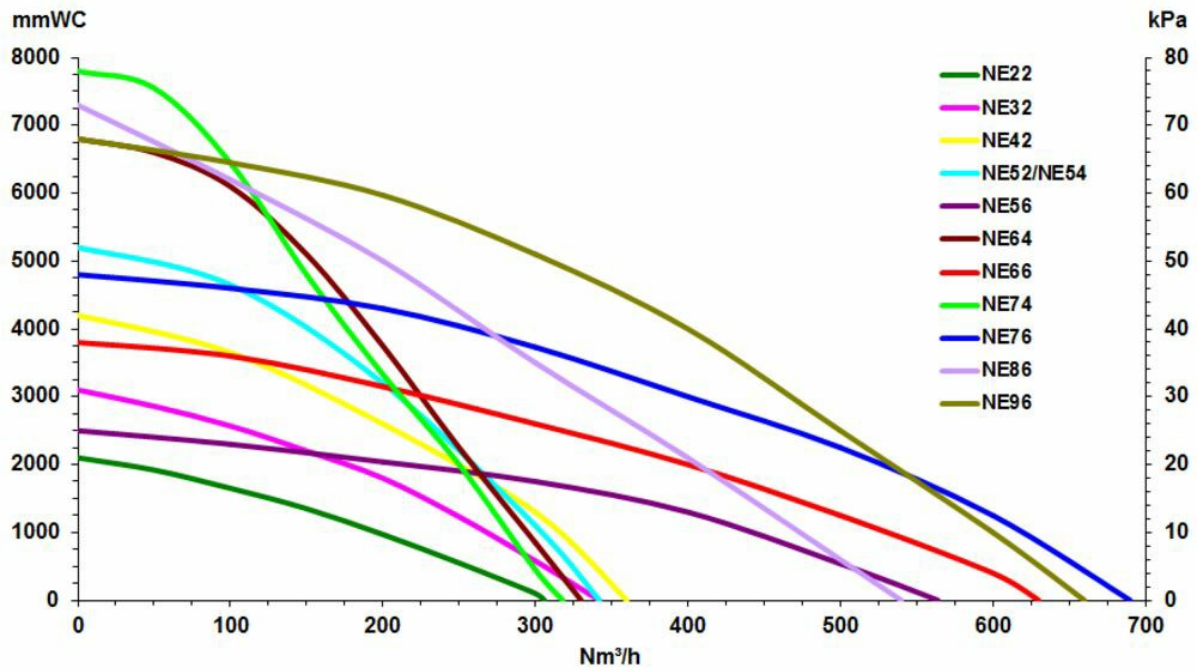

Air Powered ejectors All performance data are based on 7 bar supply pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB