Product leaflet

112A

Removal of grease and high viscosity material

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

112A

- Comes with NE 74 powerhead
- Wet cleaning
- Vacuuming capacity
- Easy handling

A high capacity vacuum unit for suction and transportation of grease and other high viscosity material. The material is collected in a plastic bag for easier discharge. Suction equipment is made for heavy duty work. The container is mounted to the trolley by brackets.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

112A

Sertifiseringer	CE
Filtertype	Stavfilter
Antall filterelementer	1
Filtermateriale	Polyester-teflon
[ItemCompressedAirRequirement]	5,3 Nm3/min
[ItemMaxAirFlow]	318
[ItemNoiselevel]	75.0
[ItemMaxVaccum]	-78
Avklaring av teknisk informasjon	Med børste og konisk munnstykke

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item number	Slangetype	[ItemHVHoseLength]	[ItemHVHoseDiameter]
	42111202[1]	PVC	7,5	51
	42111203[1]	PU12	5	38

[1] Med børste og konisk munnstykke

Hose types

Slangetype	Spesifikasjon	Temperaturområde (°C)	Endekobling, distribusjonsslange	Endekobling, innløpsslange	Slangetilkobling på trommel, distribusjonsslange	Slangetilkobling på trommel, innløpsslange
PVC	Maks vakuum -84kPa. Indre bøyeradius 60mm. Forsterket med innstøpt stålspiral.	- 20 deg. C. to + 70 Deg. C.				
PU12	Solid slange. Velegnet for slitende materialer. Transparent polyurethan 1,2mm. Forsterket med innstøpt stålspiral.	- 40 deg. C. -+ 90 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item number
	Kontroll Sfor NE86-96	43222008
	Kontroll Sfor NE 22-76	43220026
	Kontroll Sfor NE 22-76	43220001

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

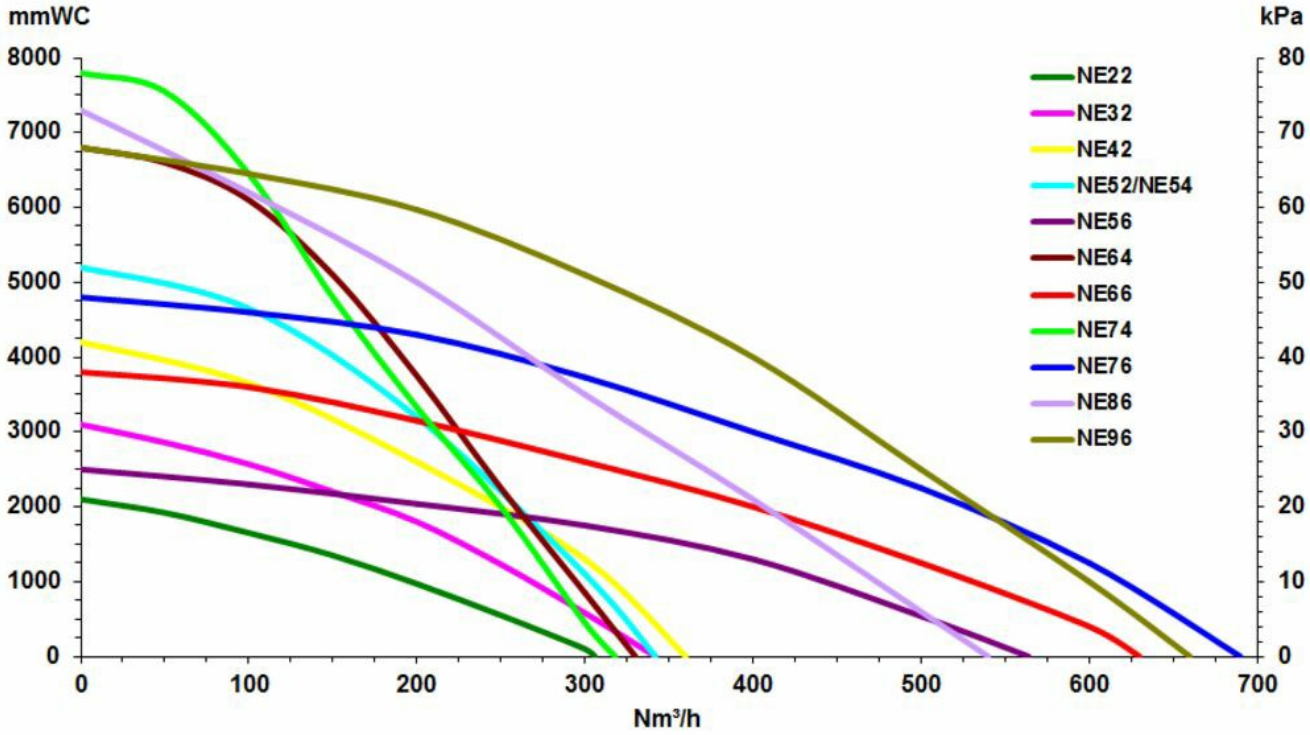

Air Powered ejectors All performance data are based on 7 bar supply pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB