

Industrial vacuum cleaner 116A

Industrial vacuum cleaner for removal of non-flammable liquids and granules



This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-01-16

1/6

Industrial vacuum cleaner 116A

- ✓ Comes with NE 52 powerhead
- ✓ Wet & Dry cleaning

- ✓ Vacuuming capacity
- ✓ Easy handling
- ✓ Tippable trolley; Bottom discharge optional

A high capacity vacuum unit for suction and transportation of various non-flammable liquids like oil, chemicals, mud, cooling liquids and water, as well as metal chips, sand, and other granules. The standard version vacuum unit can fill the container with liquids in a minute or two. Suction equipment is made for heavy duty work. The container can be tipped for ease of emptying.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-01-16

2/6

Nederman

Industrial vacuum cleaner 116A

Industrial vacuum cleaner 116A

[ProductCertifications]	[ce]
Filter type	[bag]
Number of filter elements	1
Type of hose	PVC
Max airflow (m ³ /h)	342
Max vacuum (kPa)	-52
Weight (kg)	51
Hose length (m)	7.5
Hose diameter (mm)	51

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB



2026-01-16

3/6

Nederman

Industrial vacuum cleaner 116A

Models




	Item no
	42111600 ^[1]
	42111607 ^[1]


^[1] With cleaning set, brush, conical and toothed nozzle

Hose types

Hose type	[HoseSpecification]	[HoseTemperatureRange]	[HoseFittingDistribution]	[HoseFittingInlet]	[HoseConnectionDistribution]	[HoseConnectionInlet]
PVC	Max vacuum 84 kPA Inner bending radius 60 mm Reinforced with inbedded steel helix	- 20 deg. C. to + 70 Deg. C.				

Accessories

	Accessory	Item no
	Control S for NE 22-76	43220001
	Control S for NE 22-76, wo/control box	43220026
	Control S for NE86-96, wo/control box	43222008

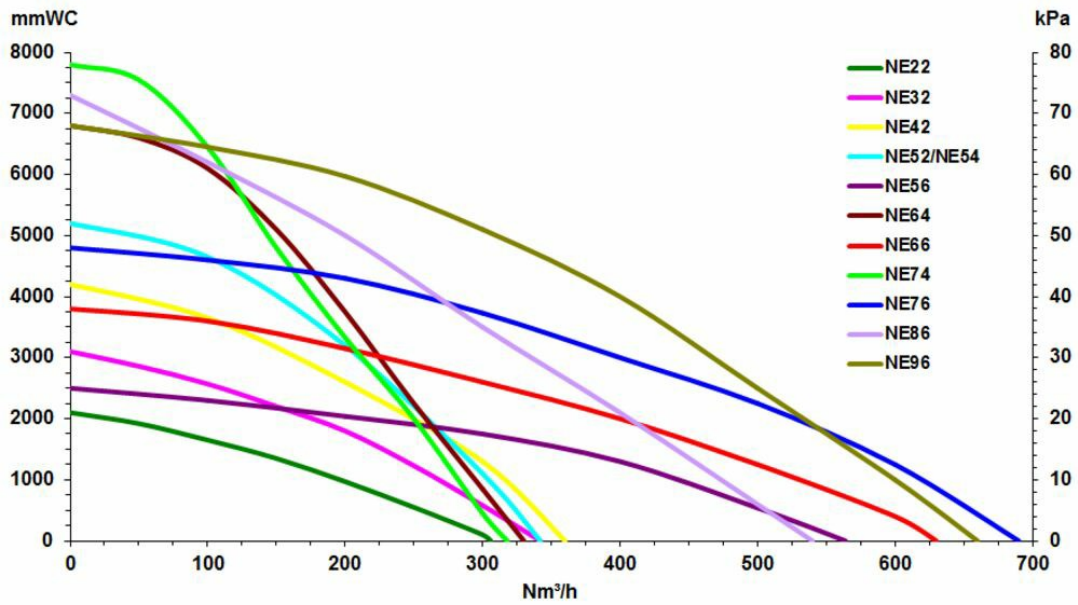

Air Powered ejectors All performance data are based on 7 bar supply pressure