Product leaflet

116A

Industrial vacuum cleaner for removal of non-flammable liquids and granules

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

116A

- Comes with NE 52 powerhead
- Wet & Dry cleaning
- Vacuuming capacity
- Easy handling
- Tippable trolley; Bottom discharge optional

A high capacity vacuum unit for suction and transportation of various non-flammable liquids like oil, chemicals, mud, cooling liquids and water, as well as metal chips, sand, and other granules. The standard version vacuum unit can fill the container with liquids in a minute or two. Suction equipment is made for heavy duty work. The container can be tipped for ease of emptying.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

116A

Sertifiseringer	CE
Filtertype	Stavfilter
Antall filterelementer	1
Slangetype	PVC
[ItemCompressedAirRequirement]	3,0 Nm3/min
[ItemMaxAirFlow]	342
[ItemNoiselevel]	75,5
[ItemMaxVaccum]	-52
Vekt (kg)	51
[ItemHVHoseLength]	7,5
[ItemHVHoseDiameter]	51
Avklaring av teknisk informasjon	Med rengjøringssett,børste,konisk og tannet munnstykke

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item number
	42111600[1]
	42111607[1]

[1] Med rengjøringssett,børste,konisk og tannet munnstykke

Hose types

Slangetype	Spesifikasjon	Temperaturområde (°C)	Endekobling, distribusjonsslange	Endekobling, innløpsslange	Slangetilkobling på trommel, distribusjonsslange	Slangetilkobling på trommel, innløpsslange
PVC	Maks vakuum -84kPa. Indre bøyeradius 60mm. Forsterket med innstøpt stålspiral.	- 20 deg. C. to + 70 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item number
	Kontroll Sfor NE 22-76	43220001
	Kontroll Sfor NE 22-76	43220026
	Kontroll Sfor NE86-96	43222008

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

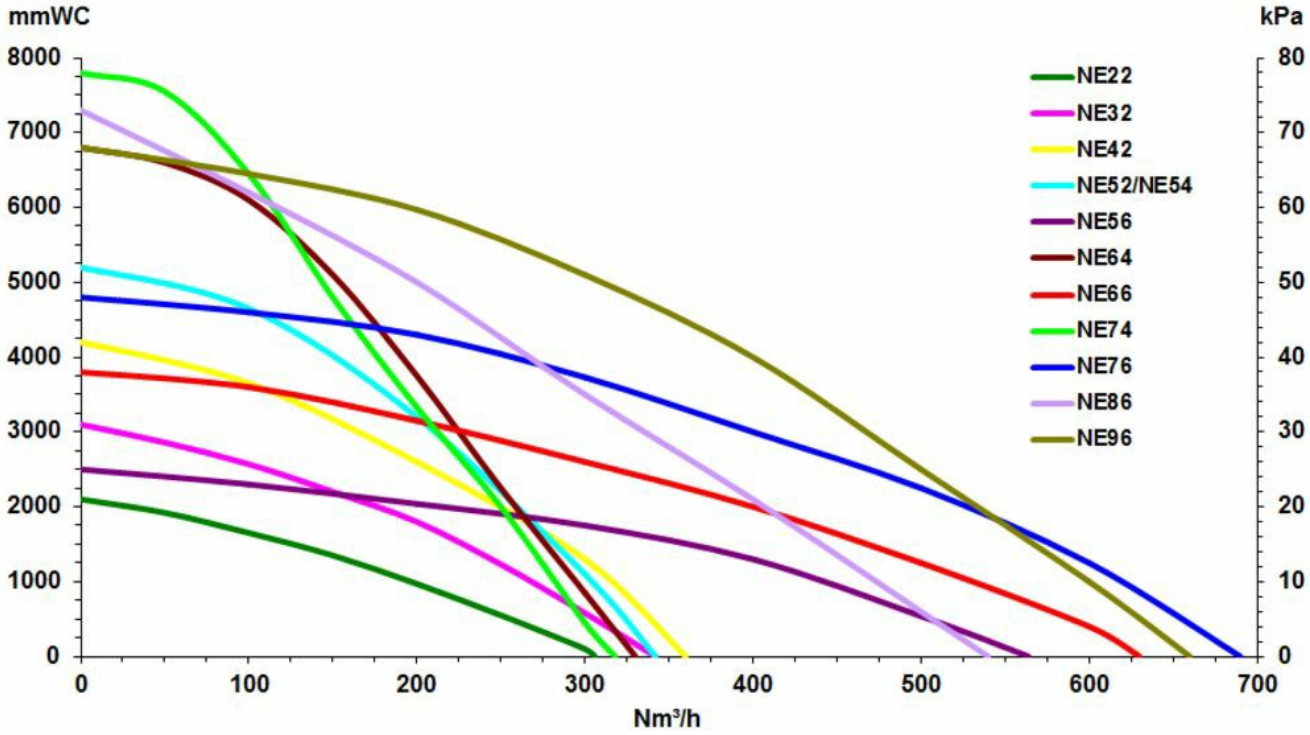

Air Powered ejectors All performance data are based on 7 bar supply pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB