

# Industrial vacuum cleaner 405A

Powerful air driven vacuum with dual container.



## Industrial vacuum cleaner 405A



- ✓ Silo pre-separator with manual outlet valve
- ✓ Fork lift handling
- ✓ Sturdy trolley system with large wheels for uneven ground

Dual container system, designed for removal of industrial waste. This powerful industrial vacuum cleaner comes equipped with a silo and filter container for the removal of industrial waste materials. Special swiveling, locking wheels are sized to increase mobility, and make the handling of heavy loads simple. The silo is designed to allow the collected material to be discharged over gratings or chutes for the central collection of materials. The unit can be equipped with an adjustable counterweight valve and holder for discharge into bags. The model include slots for handling by forklift.

## Industrial vacuum cleaner 405A

Certifications	CE
Compressed air requirement	3,0 Nm <sup>3</sup> /min
[ItemMaxAirFlow]	342
[ItemNoiselevel]	75,5
[ItemMaxVaccum]	-52
Weight (kg)	119
[ItemHWHoseDiameter]	51




## Models


	Item no	Filter type	Number of filter elements	Type of hose	[ItemHVBHoseLength]
	42140500	[cartridge]	1	PVC	7,5
	42140521			PU12	2

## Hose types

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PVC	Max vacuum 84 kPA Inner bending radius 60 mm Reinforced with inbedded steel helix	- 20 deg. C. to + 70 Deg. C.				
PU12	Suitable for abrasive material Transparent polyurethane Reinforced with inbedded steel helix	- 40 deg. C. - + 90 Deg. C.				

## Accessories

	Accessory	Item no
	Control Sfor NE 22-76	43220001
	Control Sfor NE 22-76	43220026
	Control Sfor NE86-96	43222008

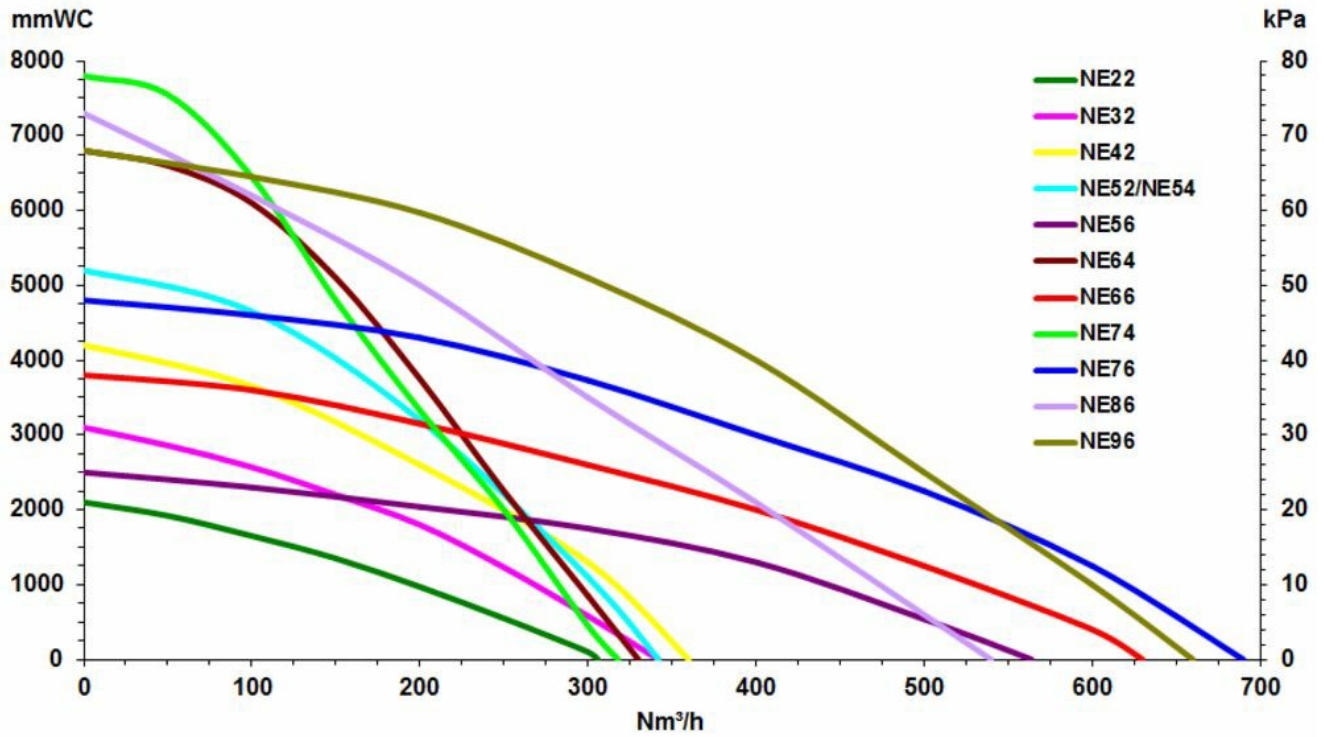

Air Powered ejectors All performance data are based on 7 bar supply pressure