Product leaflet

Industrial vacuum cleaner 405A

Powerful air driven vacuum with dual container.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Industrial vacuum cleaner 405A

- Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground

Dual container system, designed for removal of industrial waste. This powerful industrial vacuum cleaner comes equipped with a silo and filter container for the removal of industrial waste materials. Special swiveling, locking wheels are sized to increase mobility, and make the handling of heavy loads simple. The silo is designed to allow the collected material to be discharged over gratings or chutes for the central collection of materials. The unit can be equipped with an adjustable counterweight valve and holder for discharge into bags. The model include slots for handling by forklift.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Industrial vacuum cleaner 405A

Certifications	CE
Compressed air requirement	3,0 Nm3/min
Max airflow (m³/h)	342
Noise level (dB(A))	75,5
Max vacuum (kPa)	-52
Weight (kg)	119
Hose diameter (mm)	51

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item no	Filter type	Number of filter elements	Type of hose	Hose length (m)
	42140500	Cartridge	1	PVC	7,5
	42140521			PU12	2

Hose types

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PVC	Max vacuum 84 kPA Inner bending radius 60 mm Reinforced with inbedded steel helix	- 20 deg. C. to + 70 Deg. C.				
PU12	Sturdy hose. Suitable for abrasive material Transparent polyurethane (t=1,2 mm) Reinforced with inbedded steel helix	- 40 deg. C. -+ 90 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item no
	Control S for NE 22-76	43220001
	Control S for NE 22-76, wo/control box	43220026
	Control S for NE86-96, wo/control box	43222008

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

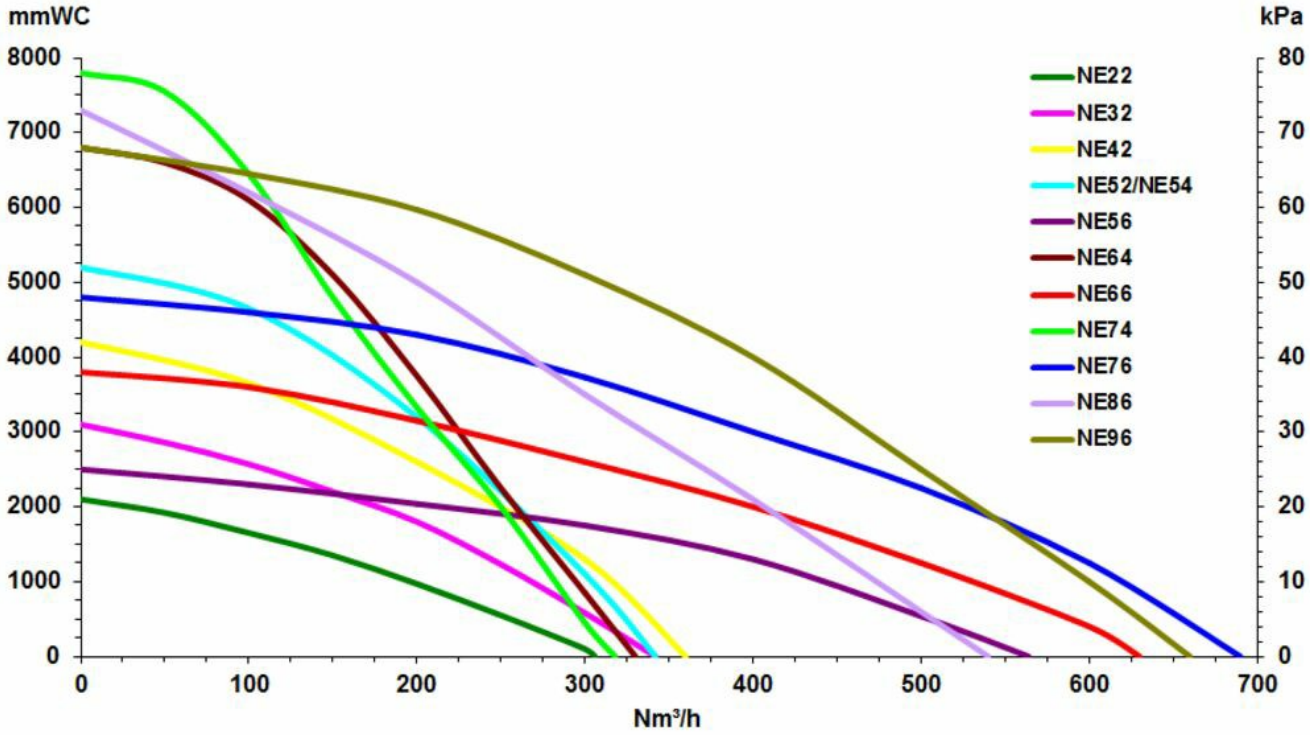

Air Powered ejectors All performance data are based on 7 bar supply pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB