产品说明书

405A

带双容器的强大气动真空吸尘器。

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

405A

- 带手动出口阀的筒仓预分离器
- 叉车装卸
- 稳固的运载装置系统有大型车轮，以应对不平地面

设计有双容器系统，用于排放工业废水。这一强大的工业真空吸尘器配有筒仓和过滤容器，用于清除工业废料。特制转动、锁轮尺寸经专业设计，更加易于移动，易于大量装卸。筒仓在设计上可将汇集于中心处的物料排放至格子或斜槽。装置可配有可调的平衡重控制阀和容器，将排放物排入袋中。模型包括插槽，用于叉车装卸。

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

405A

证书	CE
[ItemCompressedAirRequirement]	3,0 Nm3/min
[ItemMaxAirFlow]	342
[ItemNoiselevel]	75,5
[ItemMaxVaccum]	-52
重量（公斤）	119
[ItemHVHoseDiameter]	51

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

模型

	项目编号	除尘器类型	滤芯数量	软管类型	[ItemHVHoseLength]
	42140500	滤筒式过滤器	1	PVC	7,5
	42140521			PU12	2

软管类型

软管类型	描述	温度范围，摄氏度	管尾接头,输送软管	管尾接头，进气软管	盘管器,输送软管	盘管器,进气软管
PVC	最大真空度84 kPa，内弯曲半径60毫米，钢筋嵌入钢螺旋	- 20 deg. C. to + 70 Deg. C.				
PU12	适用于磨料、透明聚氨酯，嵌入钢螺旋钢筋	- 40 deg. C. -+ 90 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

配件

	配件	项目编号
	控制器	43220001
	控制器 用于NE 22-76	43220026
	控制器 用于NE86-96	43222008

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

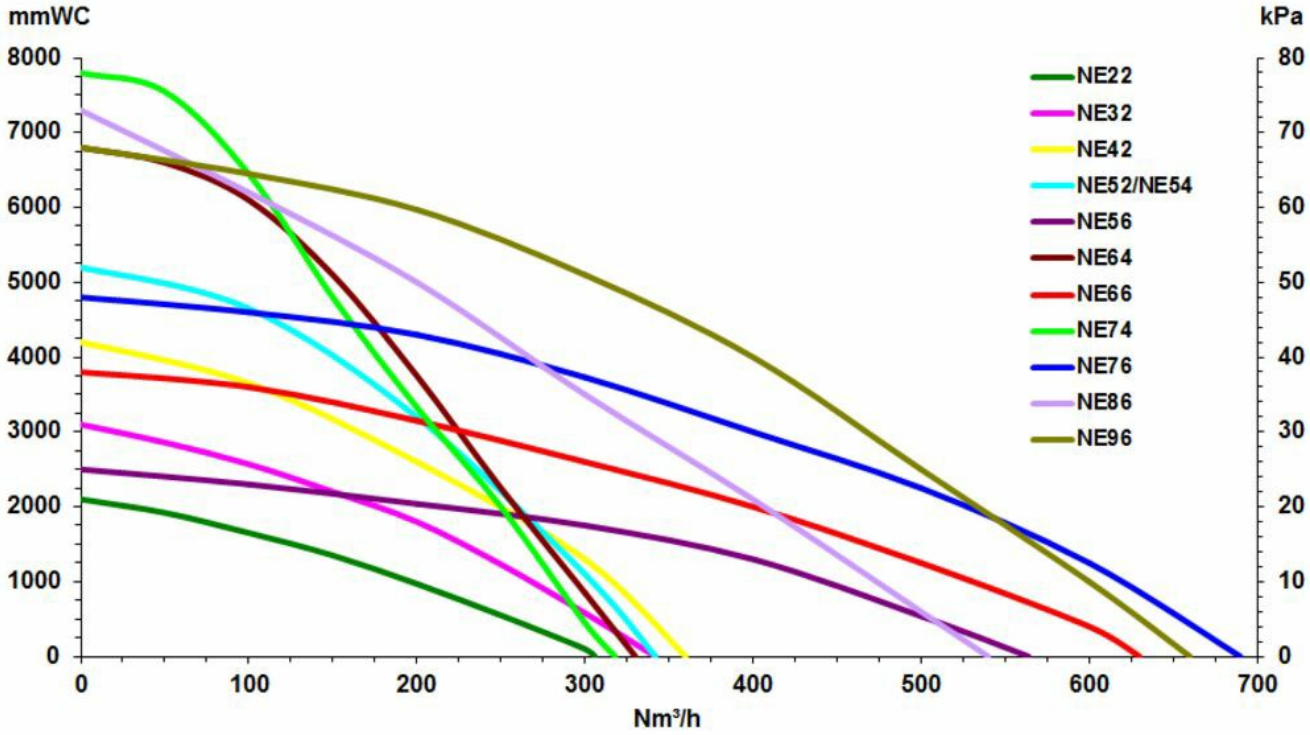

Air Powered ejectors All performance data are based on 7 bar supply pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB