

# เครื่องดูดแบบเคลื่อนย้าย 425A

Industrial vacuum cleaner for removal of industrial waste



This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-06-11

1/6

- ✓ Dry waste suction
- ✓ Silo pre-separator with manual outlet valve
- ✓ Fork lift handling
- ✓ Sturdy trolley system with large wheels for uneven ground
- ✓ automatic filtercleaning

Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-06-11

2/6

**Nederman**

เครื่องดูดแบบเคลื่อนย้าย 425A

## เครื่องดูดแบบเคลื่อนย้าย 425A

[ProductCertifications]	CE
[ItemFilterType]	ไส้กรองแบบตลับ
[ItemNbrofFilterElements]	1
[ItemTypeofhose]	PVC
[ItemCompressedAirRequirement]	3,0 Nm <sup>3</sup> /min

[ItemMaxAirFlow]	342
[ItemNoiselevel]	75,5
[ItemMaxVaccum]	-52
[ItemWeight]	119
[ItemHVVHoseLength]	7,5
[ItemHVVHoseDiameter]	51

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB


2026-06-11

3/6

**Nederman**

เครื่องดูดแบบเคลื่อนย้าย 425A

รุ่น

	เลขที่สินค้า
	42142500

ประเภทของท่อ

[HoseType]	[HoseSpecification]	[HoseTemperatureRange]	[HoseFittingDistribution]	[HoseFittingInlet]	[HoseConnectionDistribution]	[HoseConnectionInlet]
PVC	สูญญากาศแม็กซ์84 กิโลปาสคาล ภายในรัศมีตัด 60mm เสริมด้วยเหล็กเกสยาวฝังตัว	- 20 deg. C. to + 70 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB




2026-06-11

4/6

**Nederman**


เครื่องดูดแบบเคลื่อนย้าย 425A

## อุปกรณ์เสริม

	อุปกรณ์เสริม	เลขที่สินค้า
	Control S for NE86-96, wo/control box	43222008
	Control S for NE 22-76, wo/control box	43220026
	Control S for NE 22-76	43220001

**Nederman**

เครื่องดูดแบบเคลื่อนย้าย 425A

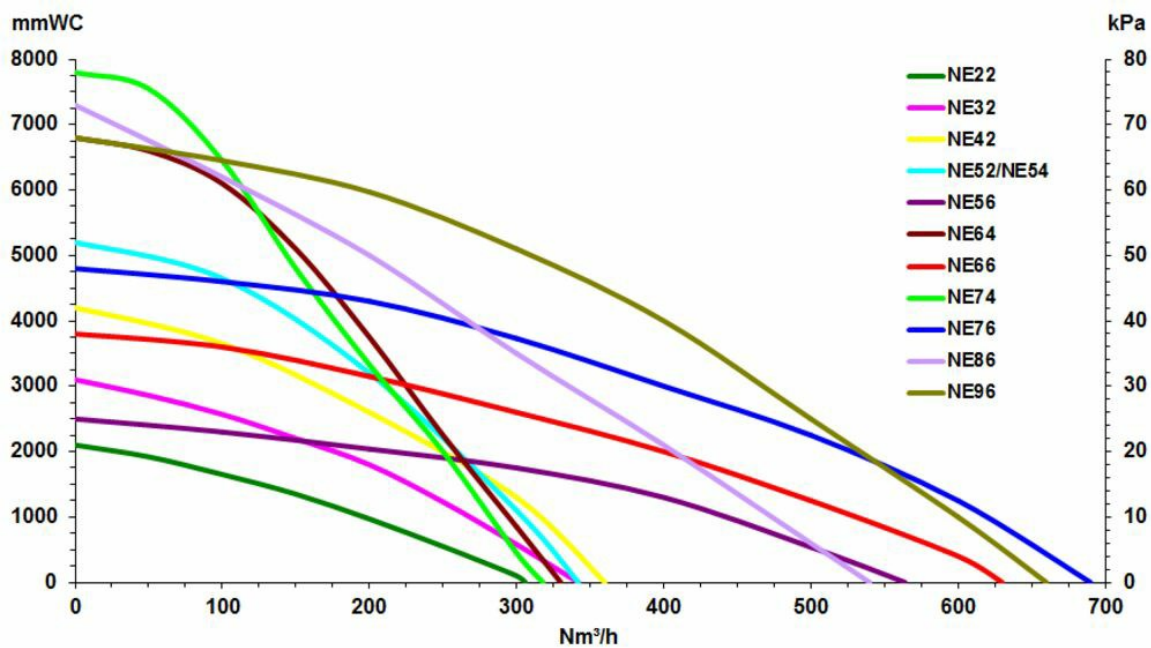

Air Powered ejectors All performance data are based on 7 bar supply pressure

---

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-06-11

6/6