

## 425A

Industrial vacuum cleaner for removal of industrial waste



## 425A


- ✓ Dry waste suction
- ✓ Silo pre-separator with manual outlet valve
- ✓ Fork lift handling
- ✓ Sturdy trolley system with large wheels for uneven ground
- ✓ automatic filtercleaning

Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

## 425A

Certifikace	CE
Typ filtru	Vložka
Počet filtračních elementů	1
Typ hadice	PVC
[ItemCompressedAirRequirement]	3,0 Nm <sup>3</sup> /min
[ItemMaxAirFlow]	342
[ItemNoiselevel]	75,5
[ItemMaxVaccum]	-52
Hmotnost (kg)	119
[ItemHVBHoseLength]	7,5
[ItemHVBHoseDiameter]	51



## Models


	Item number
	42142500

## Typ hadice

Typ hadice	Specifikace	Rozsah teplot, °C	Hadicový fitink na volném konci hadice, distribuční hadice	Hadicový fitink na volném konci hadice, přívodní hadice	Připojení hadice na naviják, distribuční hadice	Připojení hadice na naviják, přívodní hadice
PVC	Max podtlak 84 kPa Vnitřní poloměr ohybu 60mm Vyztuženo vloženou ocelovou spirálou	- 20 deg. C. to + 70 Deg. C.				

## Accessories

	Accessory	Item number
	Ovládání Spro NE86-96, bez control boxu	43222008
	Ovládání Spro NE 22-76, bez control boxu	43220026
	Kontrola S pro NE 22-76	43220001

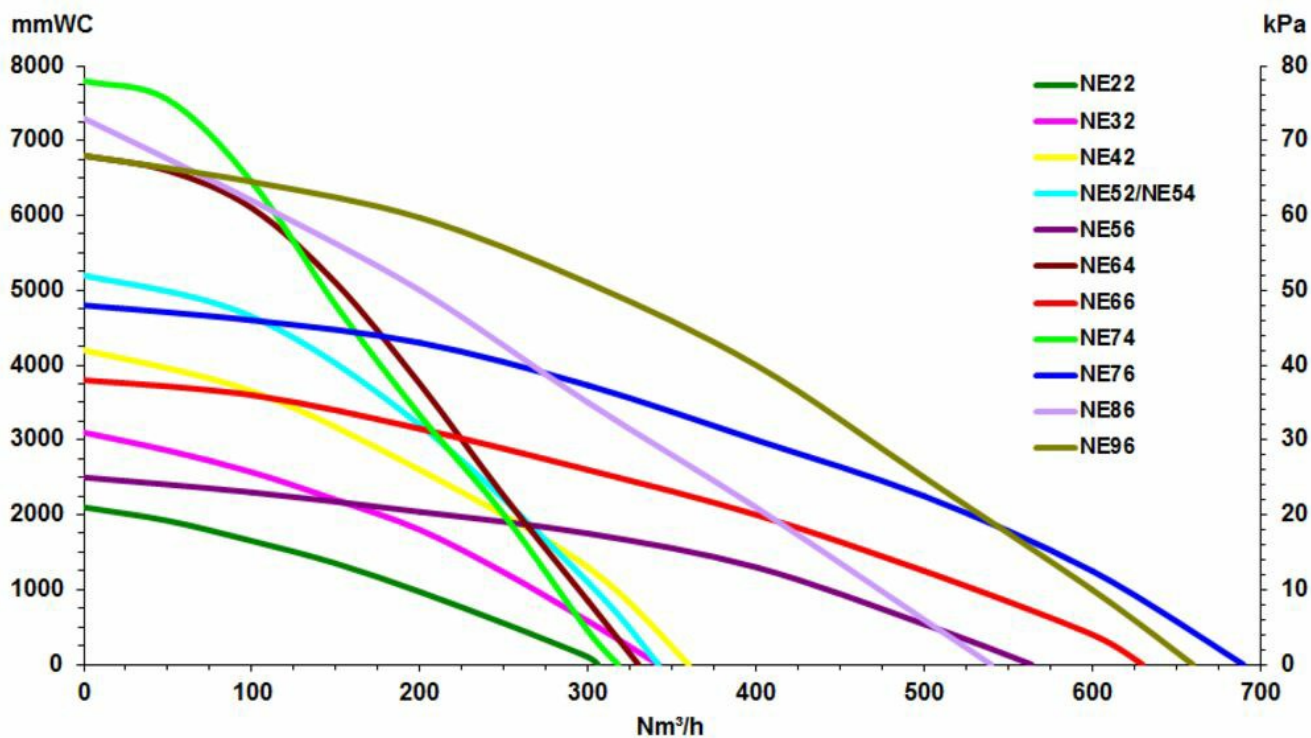

Vzduchové ejektory Všechny údaje o výkonu jsou založeny na tlaku vzduchu 7 barů