

Product leaflet

425A

Industrial vacuum cleaner for removal of industrial waste



425A



- ✓ Dry waste suction
- ✓ Silo pre-separator with manual outlet valve
- ✓ Fork lift handling
- ✓ Sturdy trolley system with large wheels for uneven ground
- ✓ automatic filtercleaning

Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

425A


Certificações	CE
Tipo de filtro	Filtro de cassete
Número de elementos filtrantes	1
Tipo de mangueira	PVC
[ItemCompressedAirRequirement]	3,0 Nm ³ /min
[ItemMaxAirFlow]	342
[ItemNoiselevel]	75,5
[ItemMaxVaccum]	-52
Peso (kg)	119
[ItemHVMHoseLength]	7,5
[ItemHVMHoseDiameter]	51

Modelos

	Item n°
	42142500
	

Tipos de mangueira

Tipo de mangueira	Especificações	Gama de temperatura, °C	Acopladores na extremidade livre, mangueira de distribuição	Acopladores na extremidade livre, mangueira de entrada	Ligação da mangueira no enrolador, mangueira de distribuição	Ligação da mangueira no enrolador, mangueira de entrada
PVC	Max vacuum 84 kPA Inner bending radius 60 mm Reinforced with inbedded steel helix	- 20 deg. C. to + 70 Deg. C.				

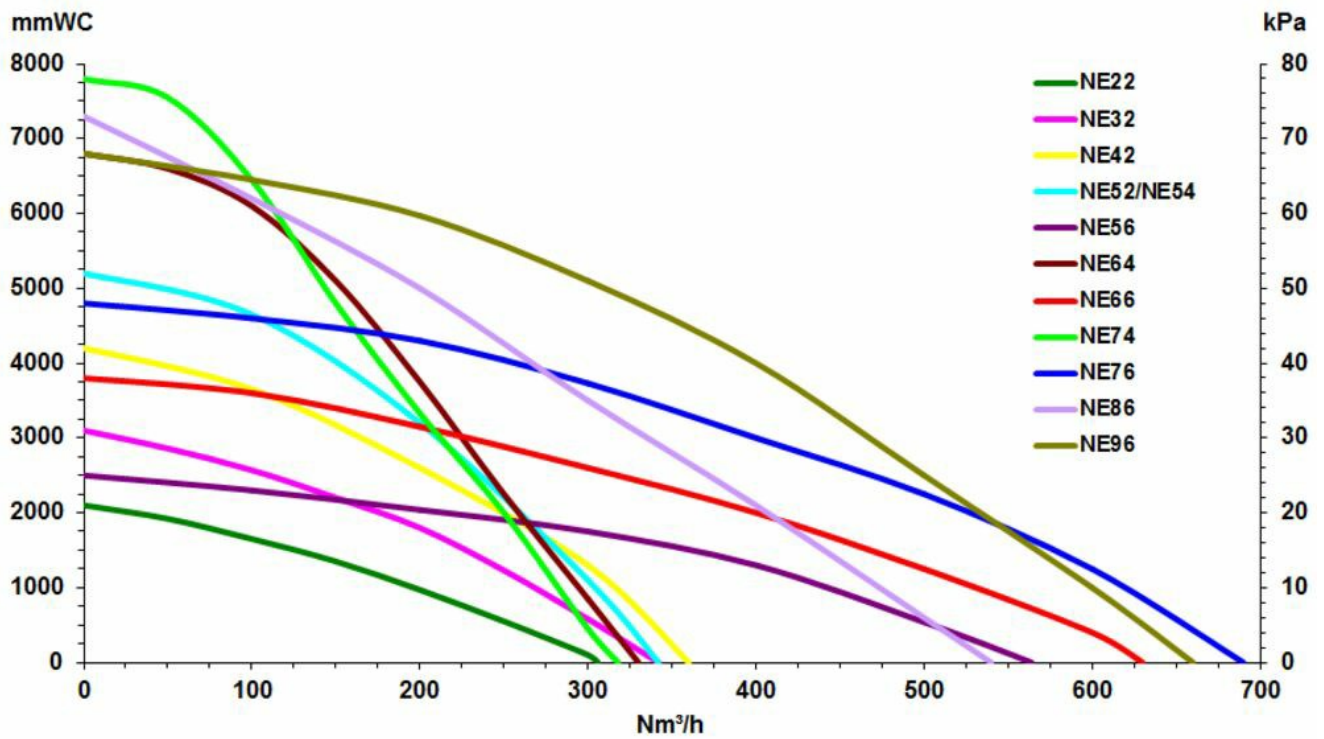

Air Powered ejectors All performance data are based on 7 bar supply pressure