Product leaflet

OSF-FC 1000

FibreDrain® colector de humo de aceite para uso continuo

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

OSF-FC 1000

- Tres etapas de filtro
- Galgas de medición de la caída de presión en cada etapa de filtro
- Una entrada de Ø200 mm con conexión de anillo de sujeción
- Two inlet ø 200 mm with clamp ring connection
- Arrancador y protector de motor incluidos

Los eliminadores de humo de aceite Nederman OSF están diseñados para manejar grandes cantidades de humo de aceite durante la operación continua. Están desarrollados con la vista puesta en la eficacia de filtración junto con un bajo coste mantenimiento.
Nederman OSF 1000 FC tiene, en su formato estándar, tres etapas de filtro donde las dos primeras etapas constan de cartuchos de filtro con tecnología FibreDrain®. Nederman tiene una amplia gama de filtros para adaptarse a los diferentes tipos de aplicaciones. La tercera etapa consiste en un filtro HEPA tipo H13 con una eficiencia del 99,95% para MPPS según EN1822.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

OSF-FC 1000

Certificaciones	CE
Estándar	2009/125/EC
Nivel sonoro	67,2
Case de protección	IP55
Eficacia de filtración (%)	99,95
Instalación	Interior
Material	Chapa metálica, recubrimiento en polvo, tanto dentro como fuera. epoxi Semi.
Tipo de método de limpieza	Autodrenaje
Capacidad (Máx. caudal m3/h)	1000
Voltaje (V)	230/400
Frecuencia (Hz)	50
Fases	3
Número de elementos filtrantes	3
Amperaje (A)	4,2 / 2,4
Color	NCS-S 1005 B20G
Peso (kg)	200
Potencia (kW)	1,1

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item number
	12400005
	12400196

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item number
	Caja de bomba de drenaje, 50 Hz	12400054
	Drain container with piping	12400764
	Filtro FibreDrain F66 OSF 1	12400006
	Filtro FibreDrain F66 OSF 2	12400007
	HEPA Filter H13; 610x610x150mm	12400852
	High capacity HEPA-filter kit for FC: 4 pcs distance holders and 1 pc HEPA filter 610x610x292mm	12400984
	Outlet connection OSF 1000FC / OMF 2000FC - HEPA 610x610x292mm	12400726
	Outlet connection OSF 1000FC / OMF 2000FC - HEPA 610x610x150mm	12400959
	FibreDrain Pumpbox KTF82-200 / 50Hz	12401330
	Frequency inverter with 2 kPa pressure sensor. 1,5kW. Protección IP66	73008913

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

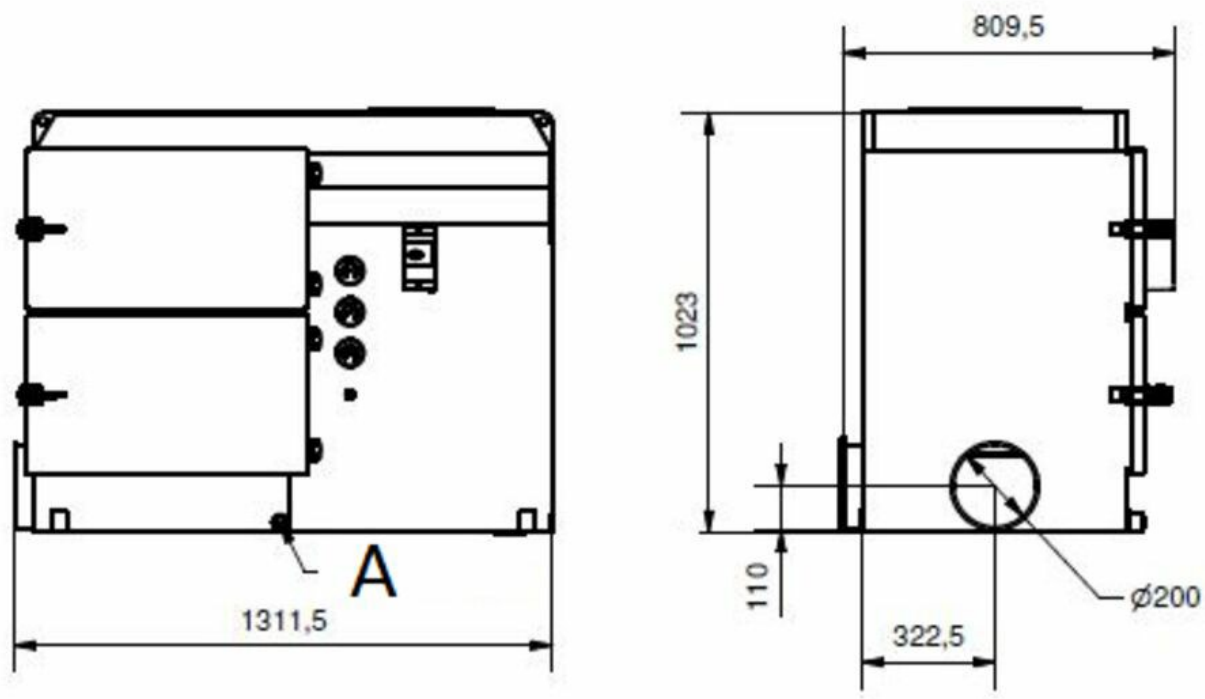

A) Drain stud (x2)

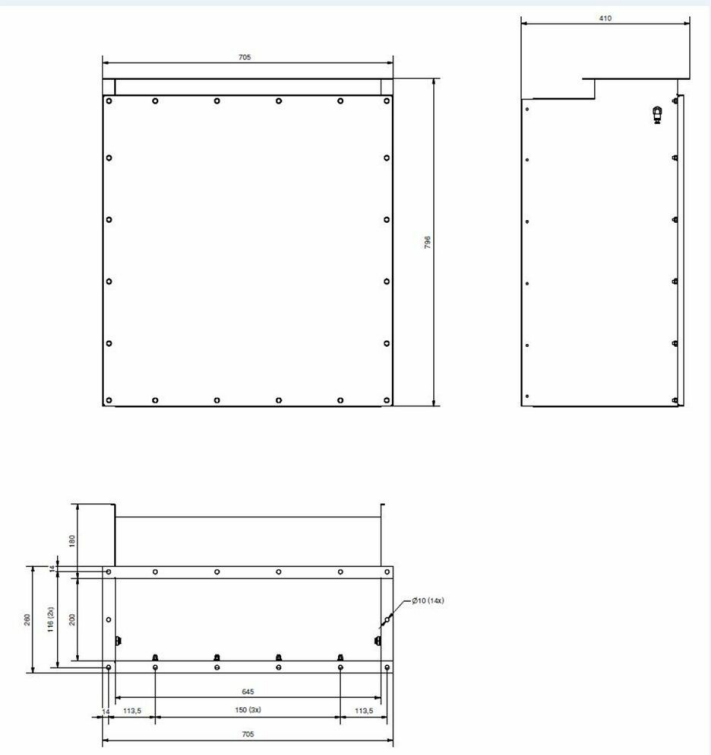

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

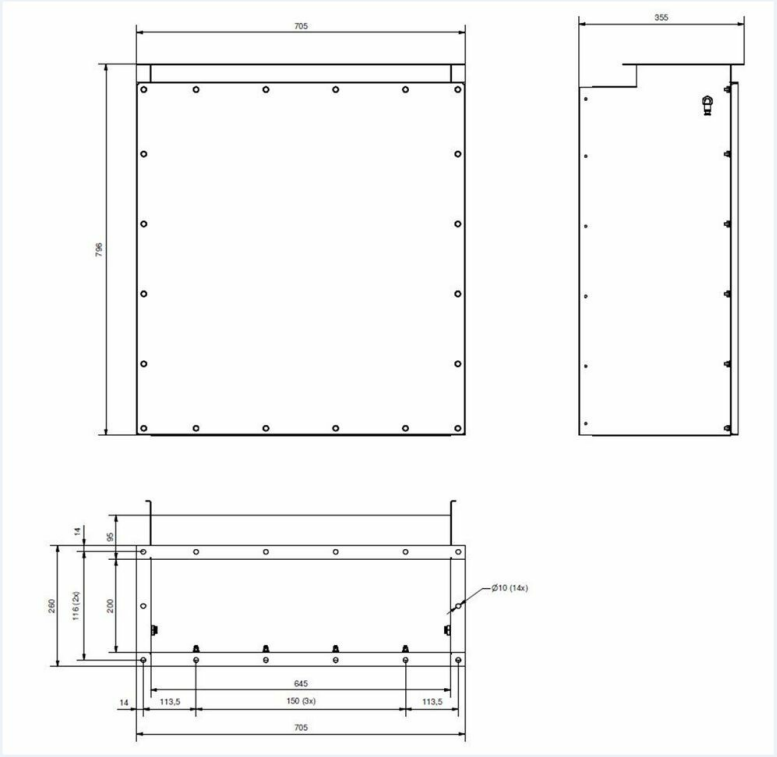

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB