

OSF 2000

FibreDrain® oil smoke collector for continuous operation.



OSF 2000

- ✓ Three filter stages, optional pre-filter
- ✓ Gauges for reading of pressure drop over each filter stage
- ✓ Extension legs
- ✓ Two inlet $\varnothing$ 315 mm with clamp ring connection

Nederman OSF oil smoke eliminators are designed to handle large amounts of neat oil mist during continuous operation. They are developed with focus on high efficient filtration together with low maintenance cost.

Nederman OSF 2000 has as standard 3 filter-stages where the first 2 stages consists of filter cassettes with Nederman's FibreDrain® technology. Nederman have a wide range of different types of filters to suit many different kind of applications. The third stage consists of a HEPA filter in filter class H13 with an efficiency of 99,95% for MPPS according to EN1822. All tower built Nederman OSF units are prepared for use of pre filter. OSF 2000 have a top mounted radial fan.

OSF 2000

Certifications	CE
Standard	2009/125/EC
Noise level (dB(A))	50/ 60 Hz: 70 dB(A) @1,5 m from service side with silencer
Protection class	IP55
Filter efficiency (%)	99.95
Installation	Indoor
Material	Sheet metal, painted both in- and outside.
Filter cleaning method	Self-Draining
Working pressure (kPa)	Max 3000 Pa
Capacity (max airflow m ³ /h)	2000
[ProductOperatingTemperature]	60 deg C (limited by filter)
Power voltage (V)	400/690
Frequency (Hz)	50
No of phases	3
Number of filter elements	6
Amperage (A)	7,2 / 4,2
Colour	NCS-S 1005 B20G
Weight (kg)	345
Power (kW)	4
Note	Plus 2 optional filter elements. Incl extension legs. This product is not included in our free of charge carriage offer. For a carriage cost please contact Nederman UK.


Models

	Item no
	12400011 ^[1]

^[1] Plus 2 optional filter elements. Incl extension legs. This product is not included in our free of charge carriage offer. For a carriage cost please contact Nederman UK.

Accessories

	Accessory	Item no
	Drain pump box, 50 Hz	12400054
	Drain container with piping	12400764
	OSF 2000 Silencer 90/Ø250	12400014
	Transition NF 4kW/Ø250/1005	12400986
	Pre-Filter ORF 610x610x96 G4I	12400039
	FibreDrain Filter F66 OSF 1	12400006
	FibreDrain Filter F66 OSF 2	12400007
	Hepa DCM H13 610x610x292	12400012
	FibreDrain Pumpbox KTF82-200 / 50Hz	12401330
	Frequency inverter with 5kPa pressure sensor. 4kW. IP66 enclosure	73008915

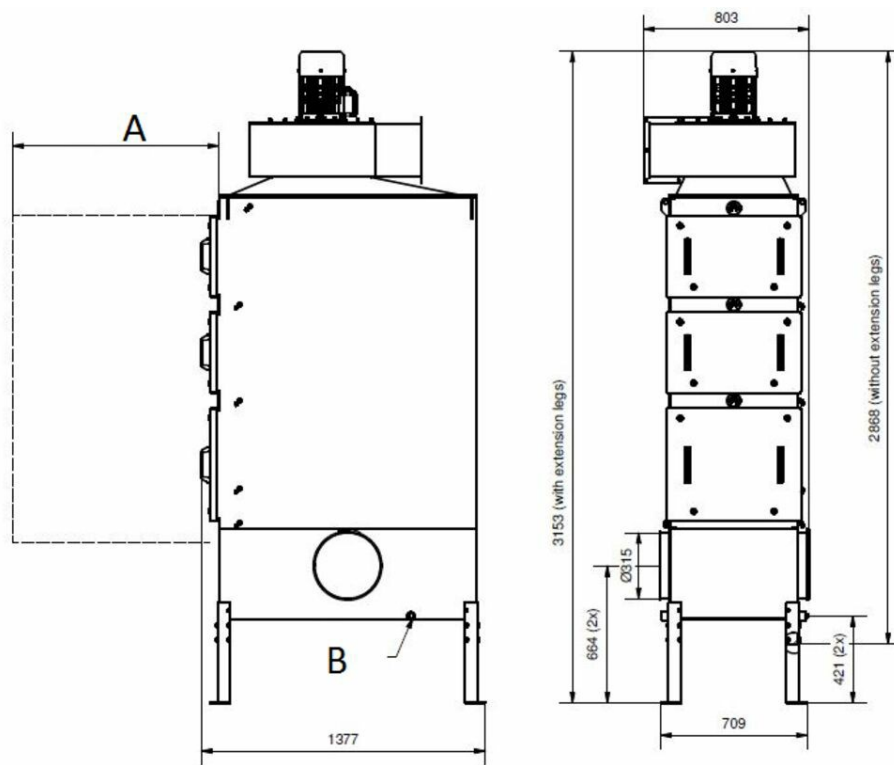

A) 1000 mm min filler service space B) Drainage DN25 (2x)