


# Air Purification Box CCD-1RC

CCD-1RC is design for free hanging applications to control light airborne dust/smoke in a contaminated air stream.

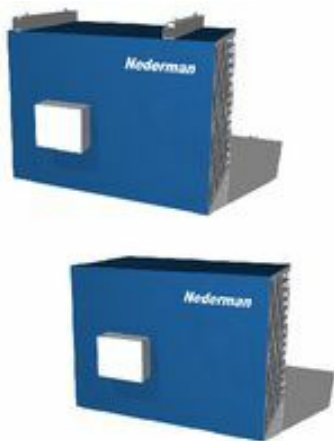

## Air Purification Box CCD-1RC

Small air polishing unit primarily used for areas with light to moderate pollution. Ideals for small service and repair shops, areas with diesel smoke, grinding particles or other airborne pollutants.

The Nederman CCD-1RC is design for free hanging applications to control light airborne dust/smoke in a contaminated air stream. Suitable applications include diesel smoke, grinding dust, weld fume, coolant mist/smoke and other airborne particulate.



It is design for indoor installation only and must be protected from excessive moisture.

The function of the machinery is that the airborne particulate is drawn by the fan into the air cleaner and through the filters located at the front of the unit. The cleaned air is discharged at the rear of the unit via a double deflection grill.


## Air Purification Box CCD-1RC


[ProductCertifications]	[ce]
[ProductNoiselevel]	75,6
[ProductFilterefficiency]	95
[ProductCompressedairconsumption]	
[ProductInstallation]	[Indoor]
[ProductFiltercleaningMethod]	[OneWayFilter]
[ProductApplication]	[dust], [fumes]
[ProductCapacityMax]	2550
[ProductOperatingTemperature]	Max. temperature of filtered media 80 Deg. C.

## Models


	Item no	[ItemPowerVoltage]	[ItemFrequency]	[ItemWeight]	[ItemPower]
	73000067	230	50	51	0,33
	73000071	230	50	51	0,33

## Accessories

	Accessory	Item no
	System of mounting brackets	73000093

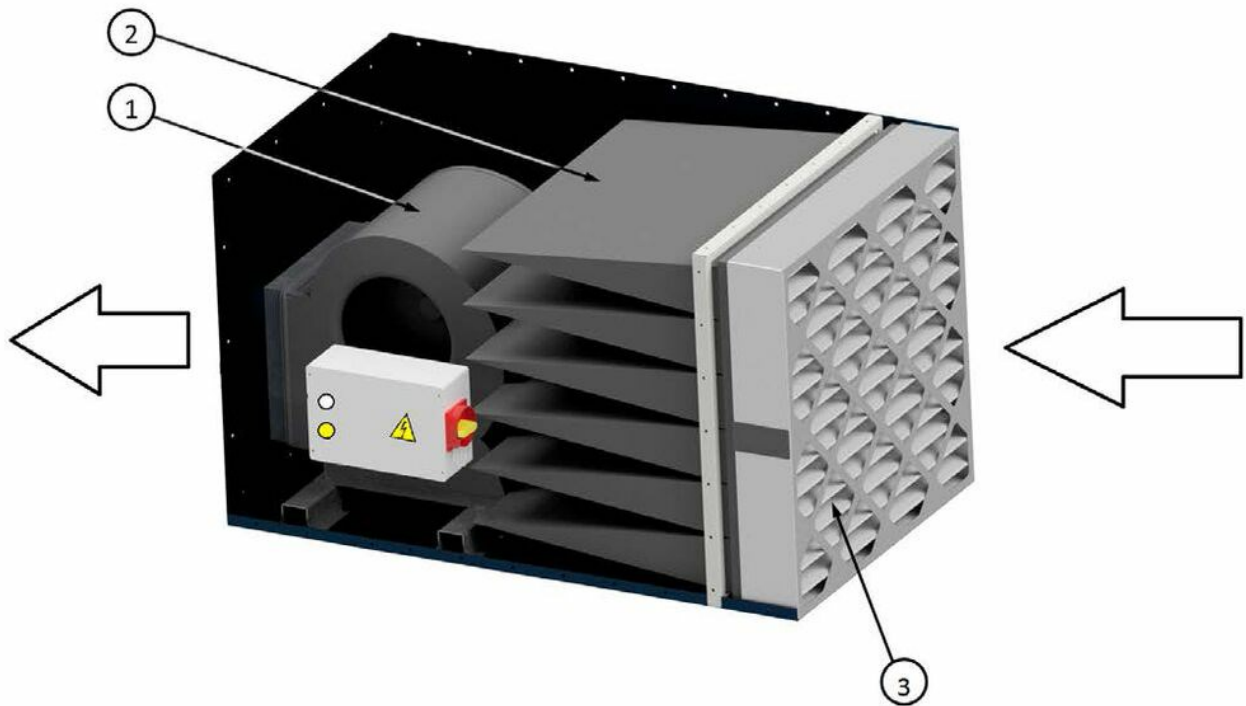

Function The function of the machinery is that the airborne particulate is drawn by the fan (pos. 1) into the air cleaner and through the filters (pos. 2) located at the front of the unit. The cleaned air is discharged at the rear of the unit via a double deflection grill (pos. 3).

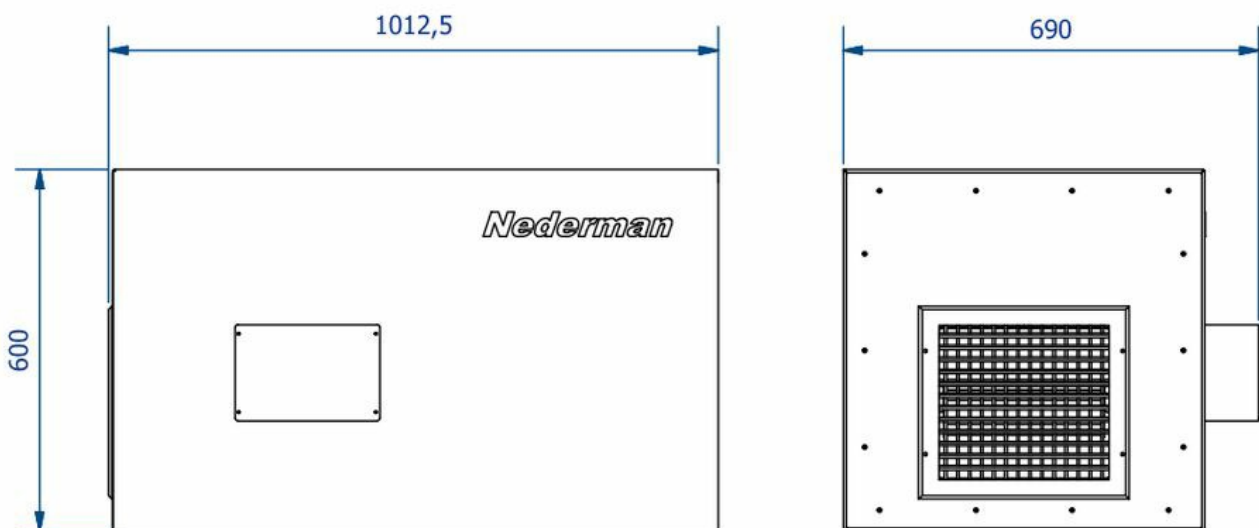

Dimensions