Product leaflet

600A EX

Güçlü bir sabit toz toplayıcı

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

600A EX

- Dayanıklı ve etkili kendi kendini temizleyen filtre
- Vakum üreticisi olarak çok güçlü ve güvenilir ejektör
- Vakum üreticisi olarak çok güçlü ve güvenilir ejektör
- İki yükseklik seçenekli ayaklar

Güçlü, sabit bir toz toplayıcı, uzun yatay ve dikey mesafelerde emiş için mükemmel yüksek vakum.
Büyük torba tutuculu ve denge ağırlıklı boşaltma vanalı veya manuel boşaltma vanalı bir toz toplayıcı ile birlikte bir toz toplayıcı seçebilirsiniz. Etkin ve kendinden temizleme özellikli torba filtreleri ile donatılmıştır.

600A EX, 2014/34 / AB Yönergesine göre kategori 2GD donanımıdır. Bu da 1999/92 / AT Yönergesi uyarınca bölge 21 veya 1 olarak sınıflandırılan alanlara yerleştirilebileceği anlamına gelmektedir. Ancak 600A EX yanıcı maddeleri vakumlamak için kullanılamaz; bunlar sadece yanıcı olmayan tozlarla kullanılmak içindir. Bunun nedeni bir iç patlamanın etkilerini sınırlayacak bir koruma sisteminin bulunmamasıdır, bu yüzden ATEX işaretlemesinde X.
ATEX onaylı donanım: II 2GD c IIB 60 ° C (T6) X

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

600A EX

Sertifikalar	CE, EX
Kurulum	[Indoor]
Filtre temizlik metodu	[CompressedAir]
[ProductApplication]	[dust], [granulate], [grit], [swarf]
Çöp kovası (l)	146
Filitre alanı (m^2)	2,5
Filtre türü	[bag]
[ItemCompressedAirRequirement]	5,3 Nm3/min
[ItemMaxAirFlow]	318
[ItemMaxVaccum]	-78
Ağırlık (kg)	240
[ItemHVHoseLength]	10
[ItemHVHoseDiameter]	51

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item number
	42260000[1]
	42260001[1]

[1] ATEX - EX II 2 GD c IIB 60°C(T6) (Not for combustible dust)

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item number
	Hortum PU12-51 U=10m kavramalara sahip	43832200
	Zemin emiş başlığıd51/400/65	43840250
	emiş borusu Dirsek d51 anti statik	43842150
	Gulper başlığı d51	43850001
	Kazıma aleti d51 l500	43851050
	el emiş h yumuşak fırça d51	43860200
	konik nozulu d51	43862001
	kırmızı konik d76-51	43880300
	Abr plate f/silo S200	43627001

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

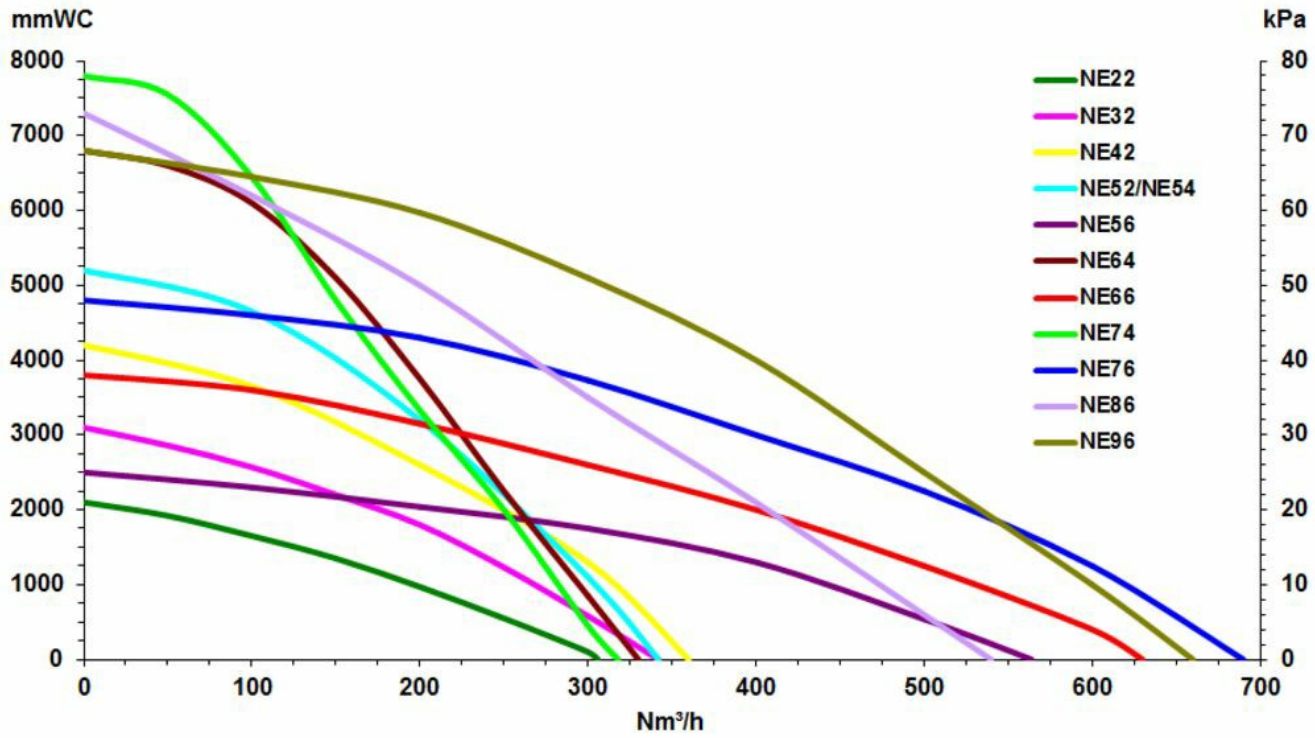

Air Powered ejectors All performance data are based on 7 bar supply pressure

Necessary hose dimension for compressed air line								
		Distance from compressor *(m)*						
Vacuum producer	Standard suction hose diameter *(mm)*	12mm *(1/2")*	20mm *(3/4")*	25mm *(1")*	32mm *(1 1/4")*	38mm *(1 1/2")*	51mm *(2")*	63mm *(2 1/2")*
NE14	38	1-8	9-58	59-200	201+			
NE22	51	1-8	9-58	59-200	201+			
NE32	51		2-22	23-69	70-110	111+		
NE42	51		1-8	9-41	42-100	101+		
NE52	51		1-6	7-29	30-70	71-160	161+	
NE56	63		1-7	8-39	40-90	91-190	191+	
NE64	76			1-21	22-41	42-102	103+	
NE66	63			1-25	26-47	48-150	151+	
NE74	76			1-15	16-31	32-63	64+	
NE76	76			1-14	15-30	31-71	72+	
NE96	76			1-4	5-11	12-32	33-125	126+

Necessary hose dimension for compressed air line

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

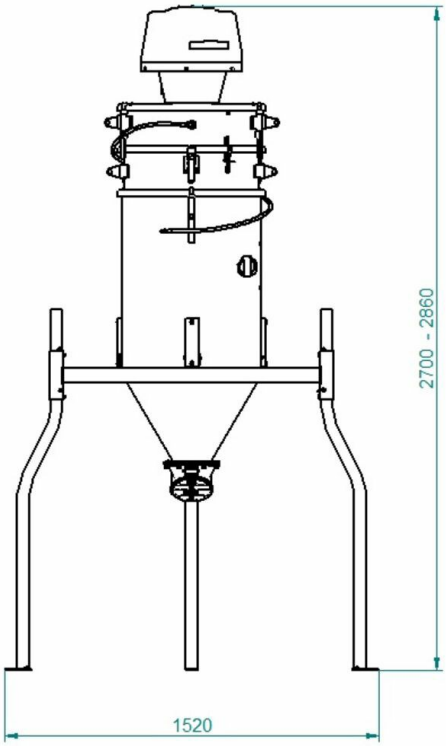

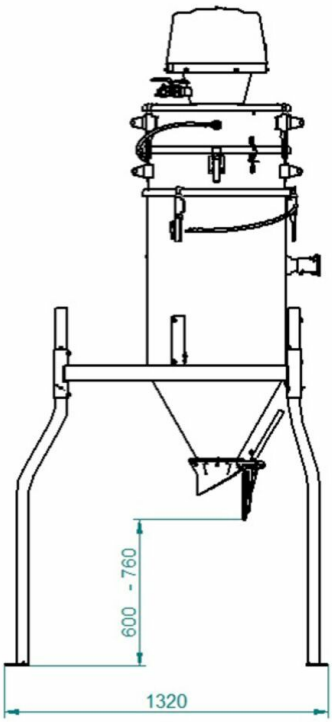

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

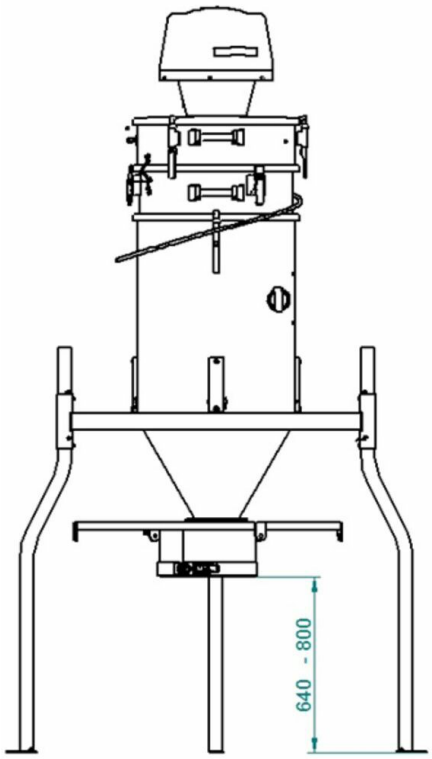

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB