Product leaflet

OSF 1500 FC

FibreDrain® olietågefilter (ren olie) for kontinuerlig drift.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

OSF 1500 FC

- Tre filter trin, forudskiller som option
- Målere til registrering af trykfald over hvert filter trin
- Kompakt design
- To indløb ø 200 mm med spændering
- Starter og motorbeskyttelse inkluderet

Nederman OSF olietågefilter er designet til at håndtere store mængder af ren olietåge under kontinuerlig drift. Filteret er udviklet med fokus på effektiv filtrering og lave vedligholdelsesomkostninger.

Nederman OSF 1500 FC har som standard filtrering på 3 trin, hvor de første to trin er forsynet med filterkassetter med Nederman's FibreDrain® teknologi. Nederman har en bred vifte af filtre, der passer til mange forskellige anvendelsesområder. Det trejde trin er forsynet med et HEPA filter i filterklasse H13 med en effektivitet på 99,95% for MPPS i henhold til EN1822. Alle tårnopbyggede OSF enheder fra Nederman er forberedt for brug af forudskiller. OSF 1500 FC har indbygget radial ventilator.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

OSF 1500 FC

Cerifikat	CE
Standarder	2009/125/EC
Volumen (for fragt m³)	2,21
Lydniveau (dB(A))	50 Hz: 67 dB(A) @1,5 m fra service side 60 Hz: 69 dB(A) @1,5 m fra service side
Beskyttelsesklasse	IP55
Filter udskilningsgrad (%)	99,95
Installation	Indendørs
Materiale	Metalplade, malet ind-og udvendig
Metode for filterrensning	[Draining]
Arbejdstryk (kPa)	Max 2500 Pa
Kapacitet (max luftvolumen m3/h)	1500
Driftstemperatur	40°C (indbygget ventilator)
Spænding (V)	230/400
Frekvens (Hz)	50
Faser	3
Antal filter	3
Strøm (A)	7,6 / 4,4
Farve	NCS-S 1005 B20G
Vægt (kg)	270
Effekt (kW)	2,2

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Modeller

	Art. Nr.
	12400874
	12400875

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Tilbehør

	Tilbehør	Art. Nr.
	Drænpumpeboks, 50 Hz	12400054
	Opsamlingsbeholder med rør	12400764
	FibreDrain Filter F66 OSF 1	12400006
	FibreDrain Filter F66 OSF 2	12400007
	Fibre Drain Filter 1 OSF; 600x300x292mm	12400164
	FibreDrain Filter 2 OSF; 600x300x292mm	12400169
	HEPA Filter H13; 610x610x150mm	12400852
	HEPA-filtersæt med høj kapacitet til OSF1000FC/OSF1500FC/OMF2000FC	12400984
	Outlet connection OSF 1500FC - HEPA 610x610x292mm	12400761
	Outlet connection OSF 1500FC - HEPA 610x610x150mm	12400886
	FibreDrain Pumpboks KTF82-200 / 50Hz	12401330
	Frekvensomformer med 5kPa tryktransmitter. 2,2 kW indbygget i IP66 skab	73008914

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

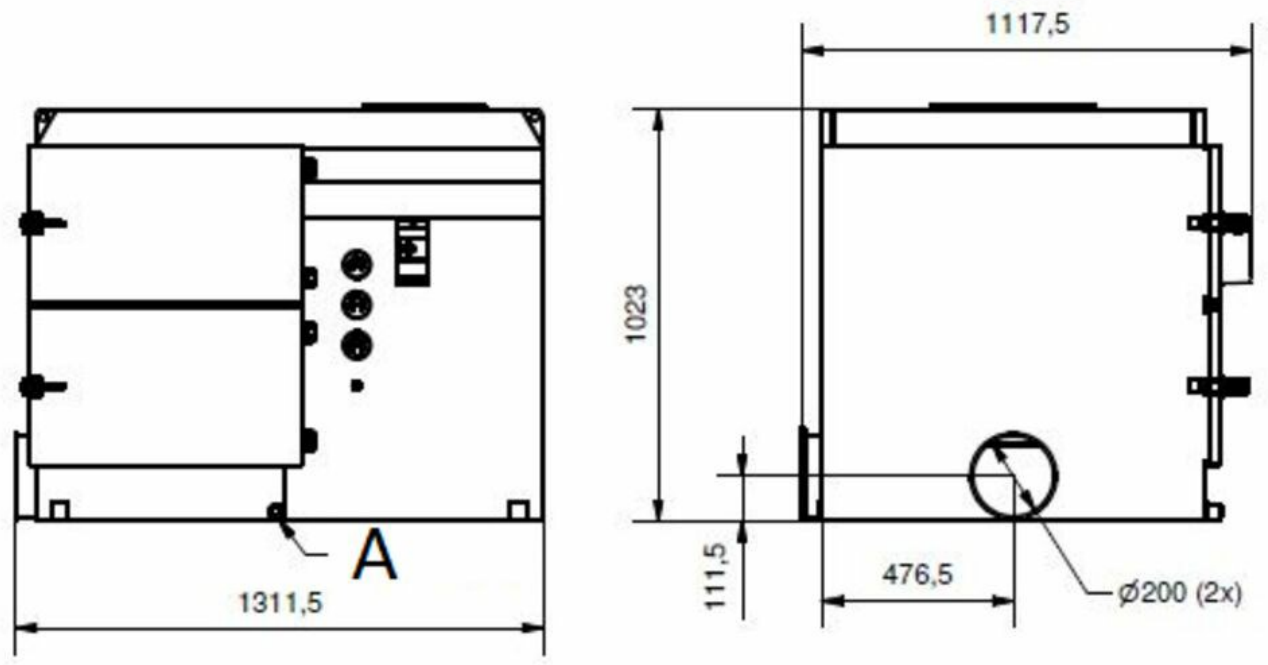

A)Drænstuds (x2)

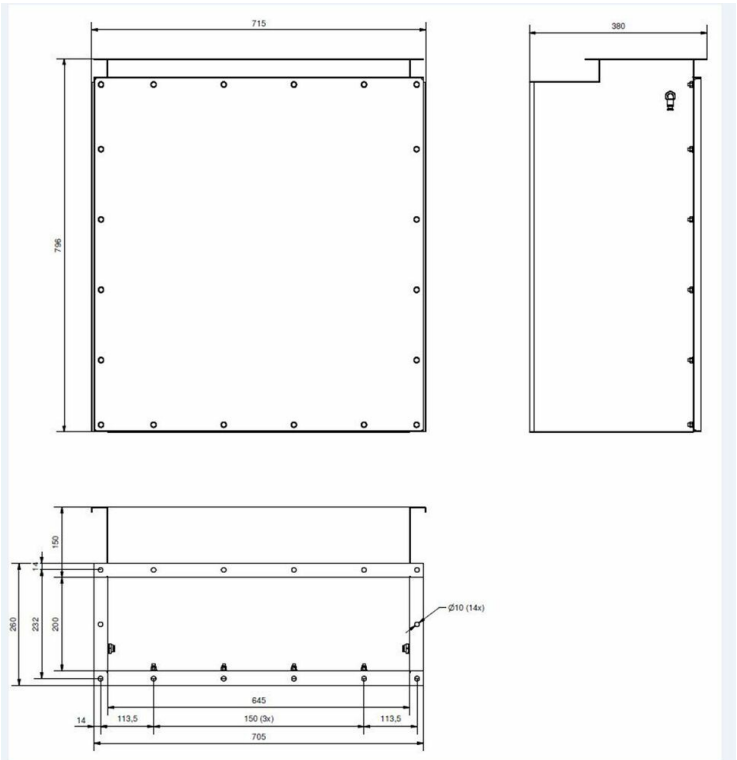

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

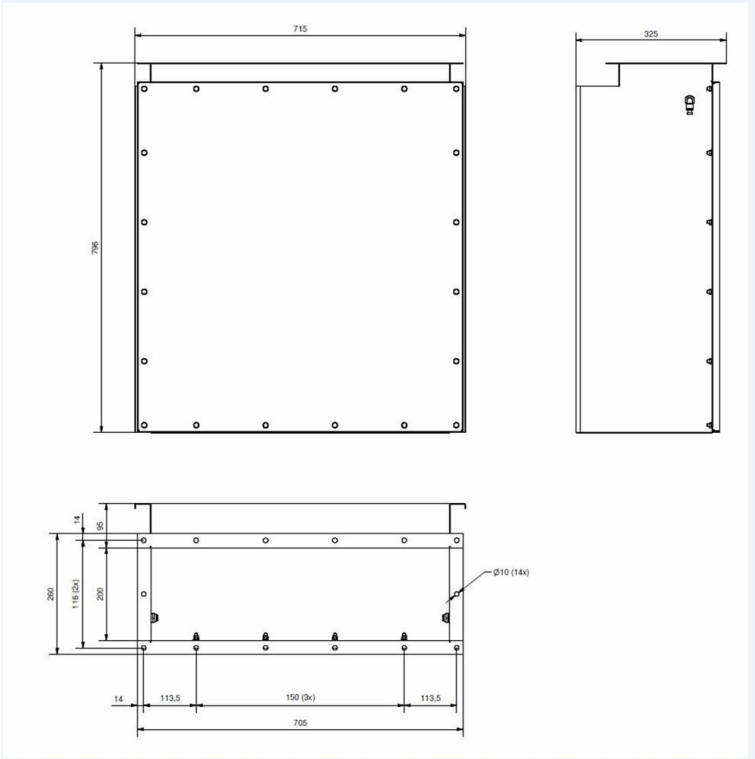

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB