Produktblad

OMF 2x4000 SM

FibreDrain® oljedimfilter för kontinuerligt bruk.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

OMF 2x4000 SM

- Tre filtersteg, valbart förfilter
- Mätare för avläsning av tryckfall över varje filtersteg
- Drain: 4 off 1 1/2"
- Non-vibration fan suspension system

Nederman OMF oljedimavskiljare är utformade för att hantera stora mängder oljerök vid kontinuerlig drift. De är utvecklade med fokus på hög effektiv filtrering tillsammans med låg underhållskostnad.
Nederman Filtac OMF 2x4000 har som standard tre filtersteg där de två första stegen består av filterkassetter med FibreDrain®-teknik. Nederman Filtac har ett brett spektrum av olika typer av filter för att passa många olika typer av applikationer. Det tredje steget består av ett HEPA-filter i filterklass H13 med en verkningsgrad på 99,95% för MPPS enligt EN1822. Alla Nederman OMF-enheter är förberedda för användning av förfilter.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

OMF 2x4000 SM

Cerifikat	CE
Standarder	2009/125/EC
Volym (för leverans m³)	10,6
Ljudnivå (dB(A))	<70 dB(A) @1,5 m från servicesidan med fläkthuv och ljuddämpare
Skyddsklassning	IP55
Filter avskiljningsgrad (%)	99,95
Installation	Inomhus
Material	Plåt, målad både in- & utvändigt.
Metod för filterrensning	Självdränering
Arbetstryck (kPa)	Max 4500 Pa
Kapacitet (max luftflöde m3/h)	8000
Temperaturområde	60°C (begränsat av filter)
Matningsspänning (V)	400/690
Frekvens (Hz)	50
Faser	3
Antal filter	12
Ström (A)	19,5 / 11,3
Färg	NCS-S 1005 B20G
Vikt (kg)	1140
Effekt (kW)	11
Observera	Plus 4 valbart filterelement.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Modeller

	Art.nr
	12401151[1]
	12401152[1]

[1] Plus 4 valbart filterelement.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Tillbehör

	Tillbehör	Art.nr
	Dränagepump box, 50 Hz	12400054
	Oljebehållare med rör	12400764
	Förfilter ORF 610x610x96	12400039
	Filter 1 Emulsion (OMF 2000 ,4000, 6000)	12400009
	FibreDrain Filter 2 OMF; 600x600x292mm	12400010
	HEPA Filter H13; 610x610x292 mm	12400012
	Inlet adapter OSF 4x2000/OMF 2x4000 SM/Ø450/1005/w inst. mtrl.	12401161
	Förhöjningsstruktur OSF 2x2000, OMF 2x4000	12401164
	Fan enclosure 2 filters in depth SM/NF7,5L/11/15/18,5kW/1005W	12401109
	Ljuddämpare 90° Ø500 (OMF 6000)	12400038
	FibreDrain Pumpbox KTF82-200 / 50Hz	12401330
	OSF/OMF Instruction manual for mounting system for electric components	12401342
	OMF/OSF/MQL mounting system for electrical components	12401341

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Tillbehör

	Tillbehör	Art.nr
	Frequency inverter with 5kPa pressure sensor. 11kW. IP66 enclosure.	73008918
	Frequency inverter with 5kPa pressure sensor. 15kW. IP66 enclosure	73008919

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

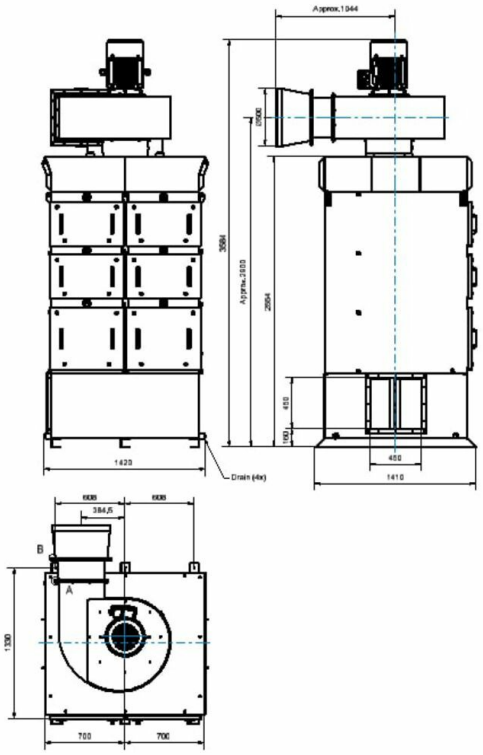

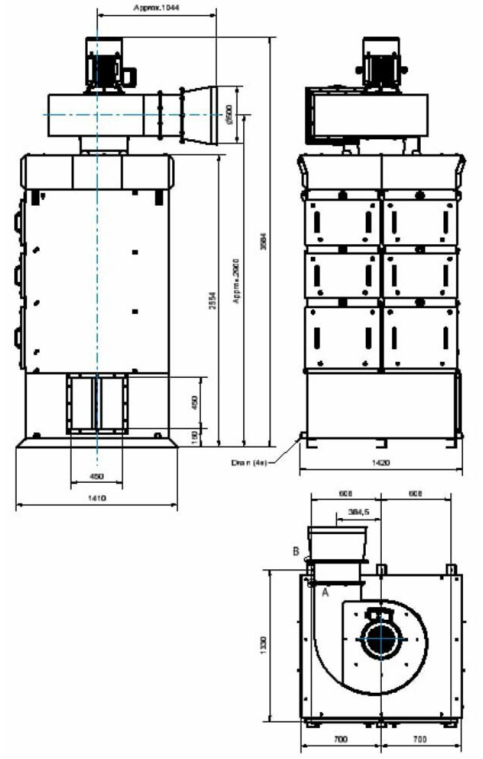

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

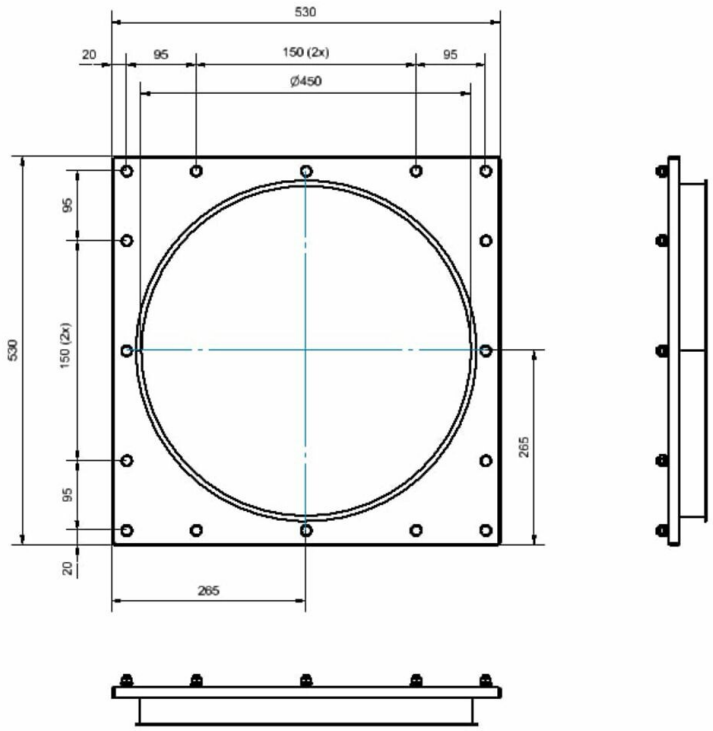

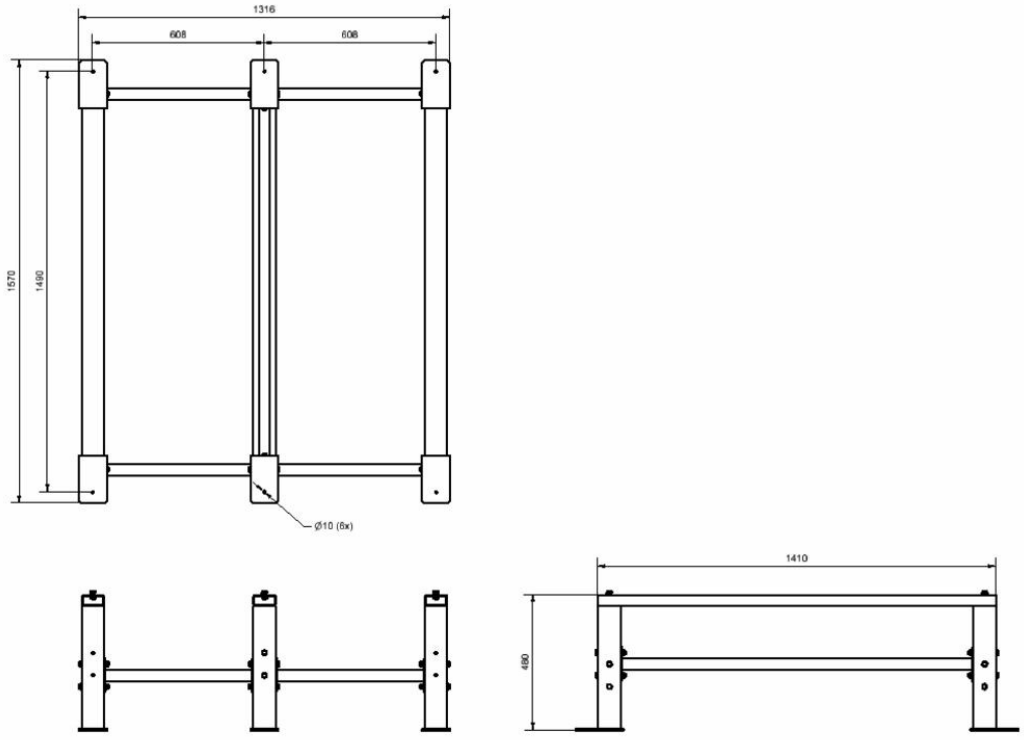

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

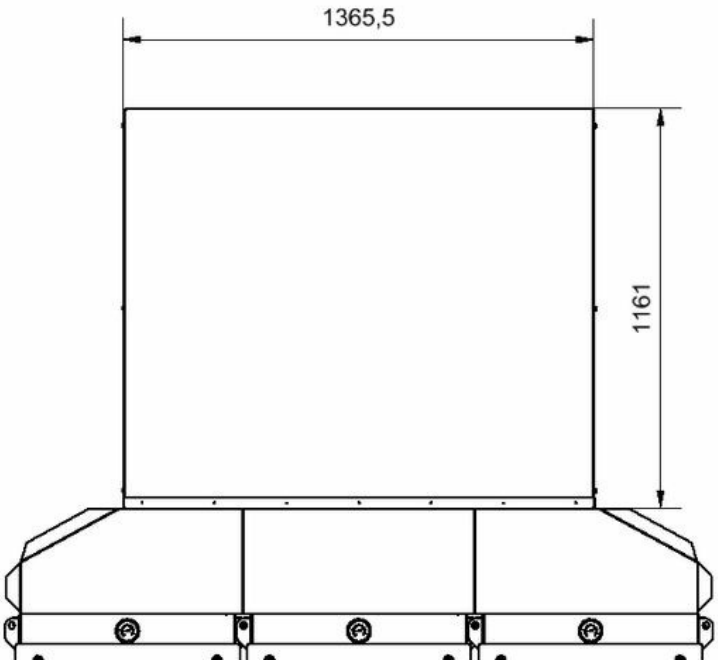

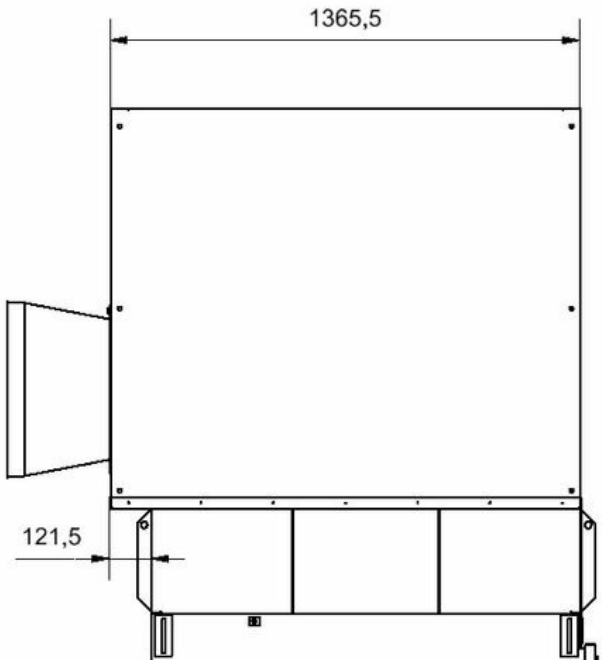

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB