Product leaflet

# OSF 2x2000 SM

FibreDrain® olietågefilter (ren olie) for kontinuerlig drift.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

# OSF 2x2000 SM

- Tre filter trin, forudskiller som option
- Målere til registrering af trykfald over hvert filter trin
- Drain: 4 off 1 1/2"
- Non-vibration fan suspension system

Nederman OSF olietågefilter er designet til at håndtere store mængder af ren olietåge under kontinuerlig drift. Filteret er udviklet med fokus på effektiv filtrering og lave vedligholdelsesomkostninger.

Nederman OSF 2x2000 SM har som standard filtrering på 3 trin, hvor de første 2 trin er forsynet med filterkassetter med Nederman's FibreDrain® teknologi. Nederman har en bred vifte af filtre, der passer til mange forskellige anvendelsesområder. Det tredje trin er forsynet med et HEPA filter i filterklasse H13 med en effektivitet på 99,95% for MPPS i henhold til EN1822. Alle tårnopbyggede OSF enheder fra Nederman er forberedt for brug af forudskiller. OSF 2x2000 SM har indbygget radial ventilator.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

# OSF 2x2000 SM

| | |
|---|---|
| Cerifikat | CE |
| Standarder | 2009/125/EC |
| Volumen (for fragt m³) | 10,6 |
| Beskyttelsesklasse | IP55 |
| Filter udskilningsgrad (%) | 99,95 |
| Installation | Indendørs |
| Materiale | Metalplade, malet både ind- og udvendigt |
| Metode for filterrensning | [Draining] |
| Arbejdstryk (kPa) | Max 3700 Pa |
| Kapacitet (max luftvolumen m3/h) | 4000 |
| Driftstemperatur | 60°C (begrænset af filter) |
| Spænding (V) | 400/690 |
| Frekvens (Hz) | 50 |
| Faser | 3 |
| Antal filter | 12 |
| Strøm (A) | 13 / 7,5 |
| Farve | NCS-S 1005 B20G |
| Vægt (kg) | 1115 |
| Effekt (kW) | 7,5 |
| Afklaring af tekniske data | Plus fire filter element som option. |

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

# Modeller

| | Art. Nr. |
|---|---|
| | 12401141[1] |
| | 12401142[1] |

[1] Plus fire filter element som option.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

# Tilbehør

| | Tilbehør | Art. Nr. |
|---|---|---|
| | Drænpumpeboks, 50 Hz | 12400054 |
| | Opsamlingsbeholder med rør | 12400764 |
| | Forfilter ORF 610x610x96 G4I | 12400039 |
| | FibreDrain Filter F66 OSF 1 | 12400006 |
| | FibreDrain Filter F66 OSF 2 | 12400007 |
| | Inlet adapter OSF 2x2000 | 12401157 |
| | Extension structure OSF 2x2000, OMF 2x4000 | 12401164 |
| | Fan enclosure 2 filters in depth | 12401109 |
| | OMF/OSF Lyddæmper 90/Ø400 | 12401158 |
| | FibreDrain Pumpbox KTF82-200 / 50Hz | 12401330 |
| | OSF/OMF Instruction manual for mounting system for electric components | 12401342 |
| | OMF/OSF/MQL mounting system for electrical components | 12401341 |
| | Frekvensomformer med 5kPa tryktransmitter. 7,5 kW indbygget i IP66 skab | 73008917 |

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

# Tilbehør

| | Tilbehør | Art. Nr. |
|---|---|---|
| | Frekvensomformer med 5kPa tryktransmitter. 11 kW indbygget i IP66 skab | 73008918 |

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

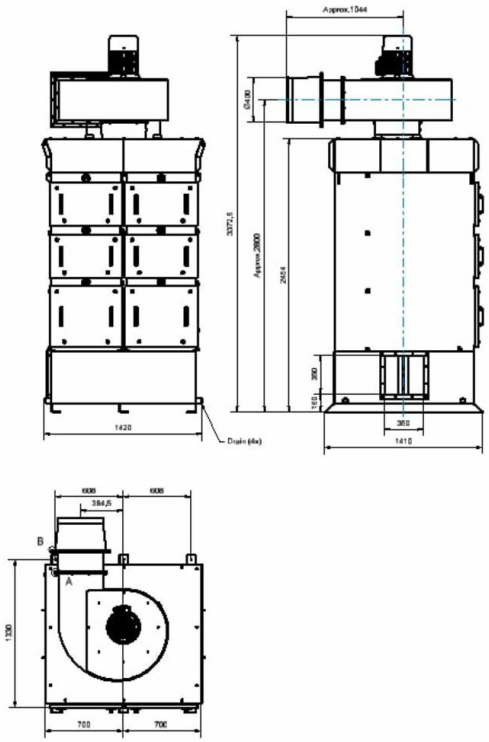


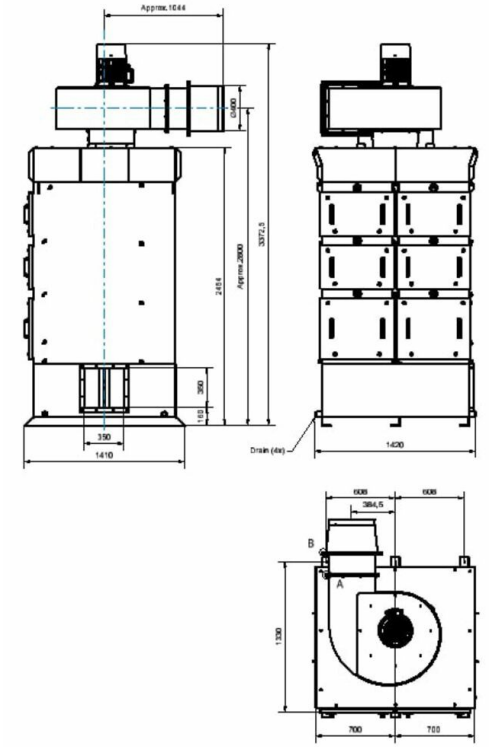


This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

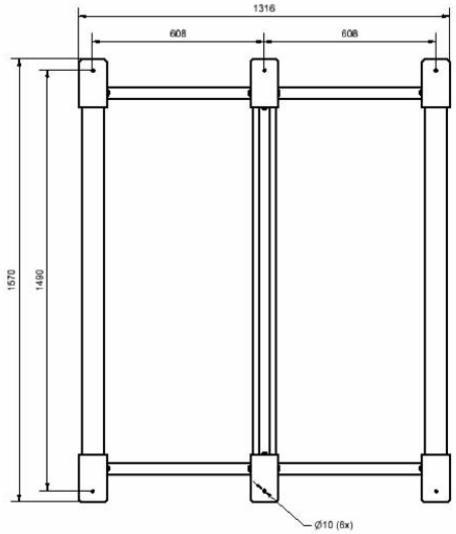


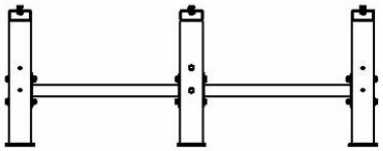

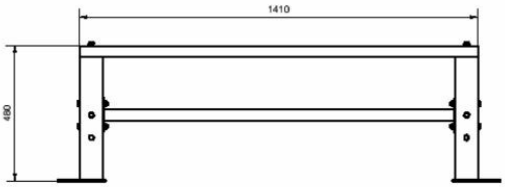


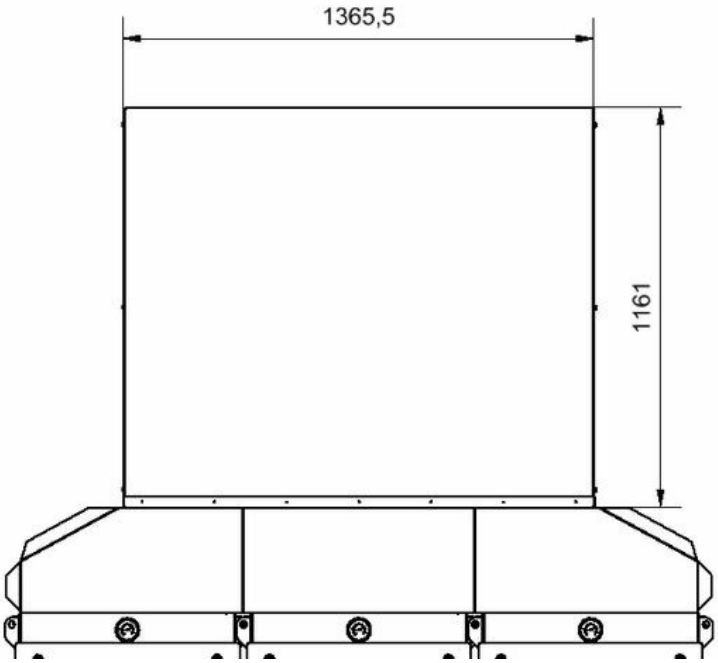


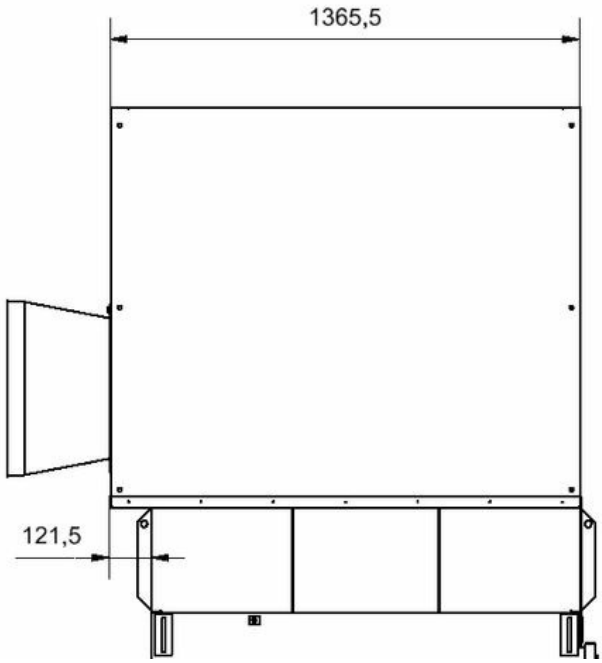


This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB