Product leaflet

710A

Dust collector with pre separator for grit recovery

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

710A

- Extremely high vacuum for suction of heavy material over long horizontal and vertical distances
- Dust separation from collected granules and grit
- Automatic filter cleaning and silo discharge

This robust and extremely powerful system is designed for the recovery of blasting shot. Equipped with automatic pneumatic pinch valve and automatic self-cleaning NCF filter. Most of the dust is separated from the blasting shot or from the collected granulates. The dust is channelled into its own container, while the blasting shot or granulated material is fed back into the blasting pot, onto conveyors or into other containers.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

710A

Certifications	[ce]
Installation	[Indoor]

Filter cleaning method	[ReverseAirPulse]
Application	[grit], [granulate]
Hose length (ft.)	32.8 ft
Number of filter elements	70
Filtermaterial	NCF 3,15
Type of hose	PU12
Compressed air requirement	187 CFM
[ItemMaxAirFlow]	318
Noise level (dB(A))	75
Max vakuum (in. wg)	314
Weight (lbs)	597
Hose length (m)	33 (10 m)
[ItemHVHoseDiameter]	2.5 (63 mm)

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item no
	42171000

Hose types

Hose type	[HoseSpecification]	[HoseTemperatureRange]	[HoseFittingDistribution]	[HoseFittingInlet]	[HoseConnectionDistribution]	[HoseConnectionInlet]
PU12	Sturdy hose. Suitable for abrasive material Transparent polyurethane (t=1,2 mm) Reinforced with inbedded steel helix	- 40 deg. C. -+ 90 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

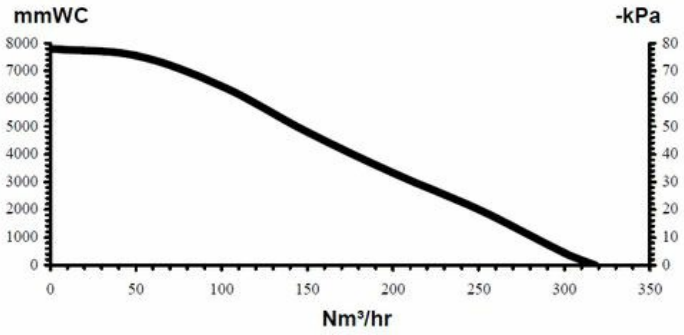

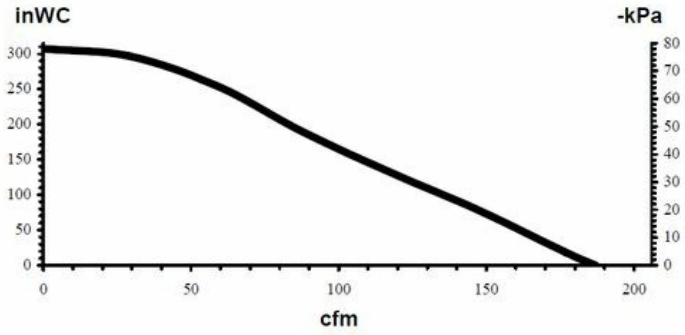

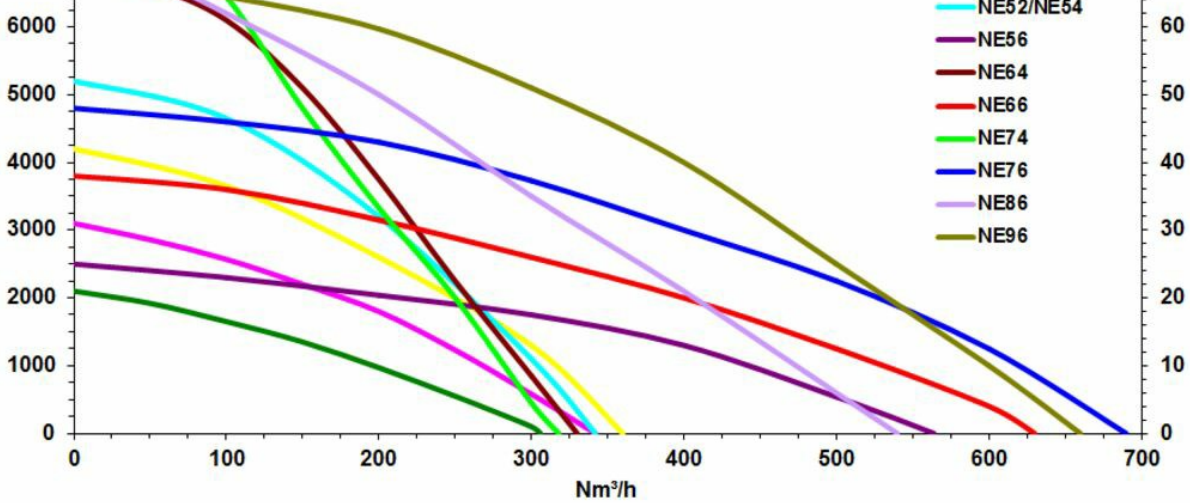

Air Powered ejectors All performance data are based on 7 bar supply pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB