Product leaflet

112A

Removal of grease and high viscosity material

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

112A

- Comes with NE 74 powerhead
- Wet cleaning
- Vacuuming capacity
- Easy handling

A high capacity vacuum unit for suction and transportation of grease and other high viscosity material. The material is collected in a plastic bag for easier discharge. Suction equipment is made for heavy duty work. The container is mounted to the trolley by brackets.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

112A

Certificeringen	CE
Filtertype	Zakken filter
Aantal filterelementen	1
Persluchtsbehoefte	5,3 Nm3/min
[ItemMaxAirFlow]	318
[ItemNoiselevel]	75.0
Max. vacuüm	-78

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item number	Slangtype	[ItemHVHoseLength]	[ItemHVHoseDiameter]
	42111202[1]	PVC	7,5	51
	42111203[1]	PU12	5	38

[1] With brush and conical nozzle

Hose types

Slang type	Specificaties	Temperatuurbereik, °C	Slangkoppelingen einde werkslang	Slangkoppelingen einde koppelslang	Slangaansluiting op de haspel, werkslang	Slangaansluiting op de haspel, koppelslang
PVC	Max vacuüm 84 kPA Binnenbuigstraal 60 mm Verstevigd met verzonken stalen spiraal	- 20 deg. C. to + 70 Deg. C.				
PU12	Geschikt voor abrasief materiaal Transparant polyurethaan Verstevigd met verzonken stalen spiraal	- 40 deg. C. -+ 90 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item number
	Control S for NE86-96, wo/control box	43222008
	Control S for NE 22-76, wo/control box	43220026
	Control S for NE 22-76	43220001

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

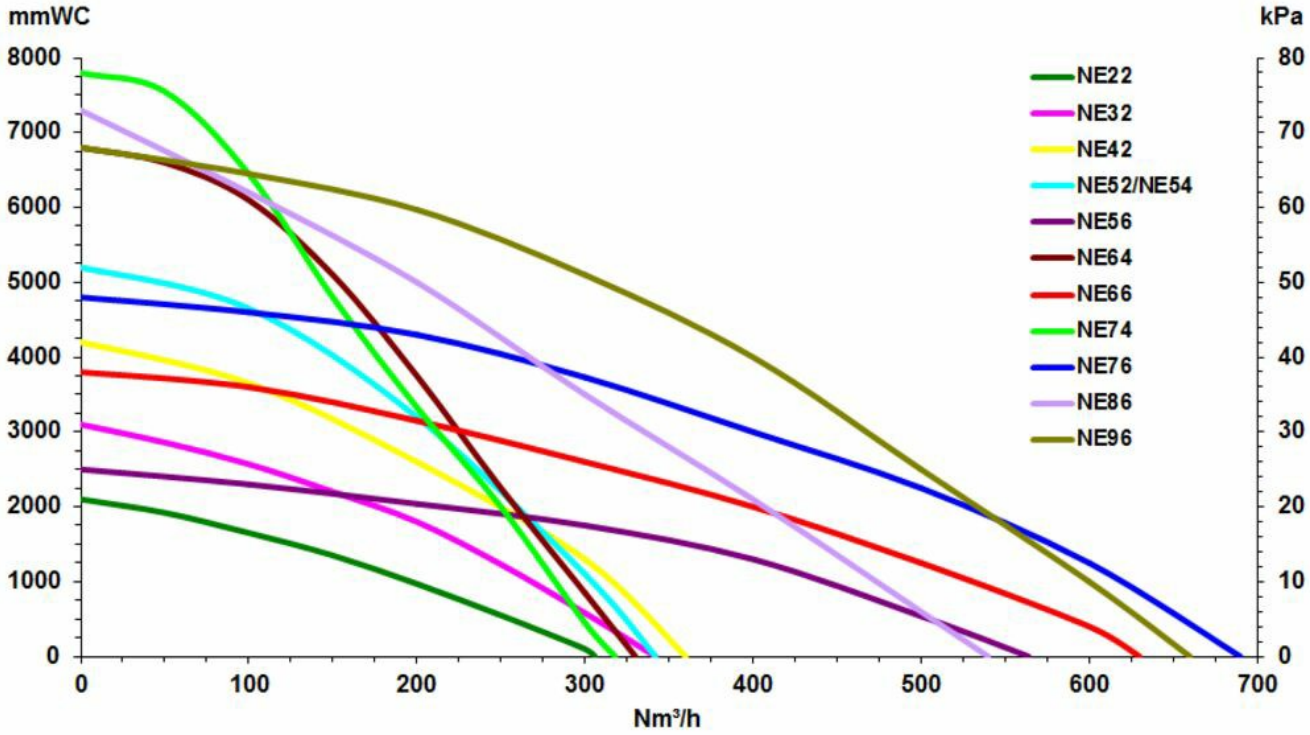

Air Powered ejectors All performance data are based on 7 bar supply pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB