

OMF 2000 FC

FibreDrain® oil mist collector for continuous operation.



OMF 2000 FC

- ✓ Three (3) filter stages.
- ✓ Gauges for reading of pressure drop over each filter stage
- ✓ Compact design
- ✓ Two (2) Ø200mm inlet locations, one blanked using clamp ring connection.
- ✓ Push button start/stop with integral overload protection.

The Nederman OMF (Oil Mist Filter) is designed to handle large amounts of oil mist during continuous operation. They are engineered for high efficiency filtration coupled with lower maintenance costs.

The OMF 2000FC has an internal, radial fan wheel and three-stage filtration, as standard. The first two stages consist of filter cassettes with Nederman's FibreDrain® technology. The third stage is a class H13 HEPA filter with a 99.95% efficiency for MPPS, per EN1822. Nederman offers a wide selection of filters to fit a range of different applications.

OMF 2000 FC


Certifications	[ce]
[ProductStandards]	2009/125/EC
Volume (for shipping) (ft³)	60.74
Noise level (dB(A))	60 Hz: 68 dB(A) @ 5 ft from service side
Protection class	IP55
Filter efficiency (%)	99.95
Installation	[Indoor]
Material	Sheet metal, painted inside and outside.
Filter cleaning method	[Draining]
Working pressure (psi)	10.0" (External)
Capacity (max airflow cfm)	1177
Operating Temperature	104° F, internal fan.
Power voltage (V)	460
Frequency (Hz)	60
No of phases	3
Number of filter elements	3
Amperage (A)	7.9
Colour	NCS-S 1005 B20G
Noise level (dB(A))	68 dB(A) @1,5 m from service side
Weight (lbs)	441
Power (Hp)	3 (2,2 kW)

Models

	Item no
	12400974
	12400960

Accessories

	Accessory	Item no
	Drain container with piping	12400764
	HEPA Filter H13; 610x610x150mm	12400852
	High capacity HEPA-filter kit for FC: 4 pcs distance holders and 1 pc HEPA filter 610x610x292mm	12400984
	Outlet connection OSF 1000FC / OMF 2000FC - HEPA 610x610x292mm	12400726
	Outlet connection OSF 1000FC / OMF 2000FC - HEPA 610x610x150mm	12400959
	FibreDrain Pumpbox KTF81-220 / 60Hz	12401329
	Frequency inverter with 5kPa pressure sensor. 2,2kW. IP66 enclosure	73008914

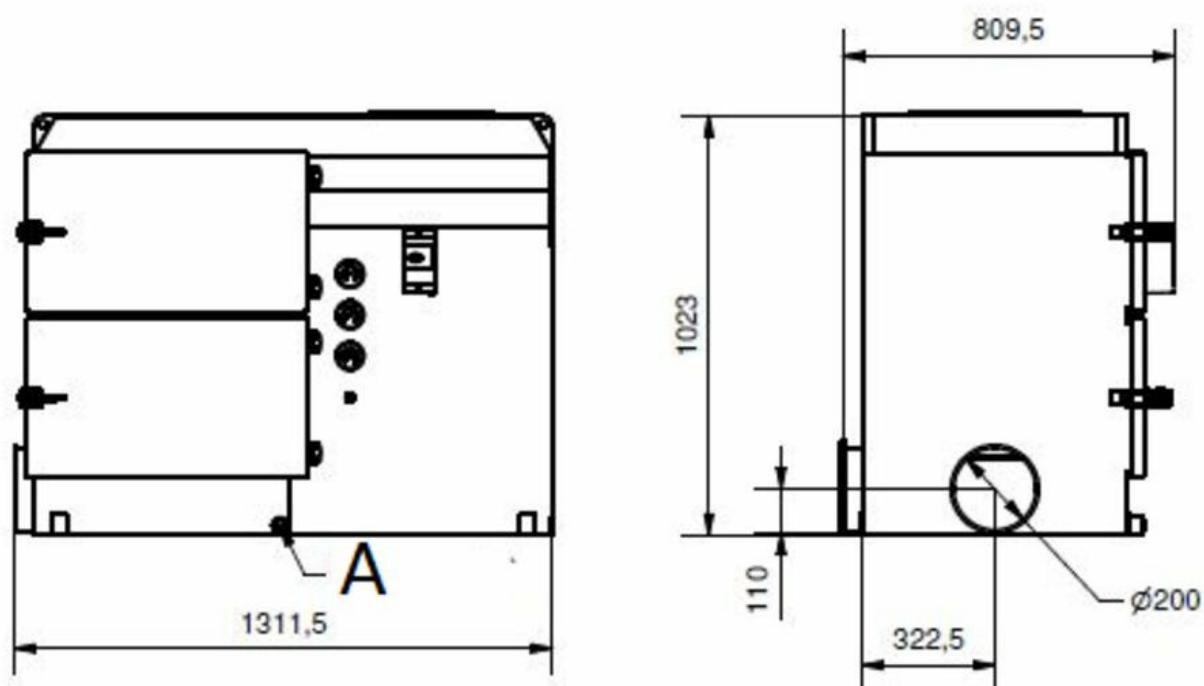

A) Drain stud (x2)

