

# SiloSafe Filter

Compact reverse jet tubular cartridge dust - collector



## SiloSafe Filter

- ✓ Robust fully welded steel, hot dip galvanized construction. Weatherproof for exposed locations.
- ✓ High strength, independently tested to resist explosions, for ATEX compatibility.
- ✓ Tough integral mounting flange.
- ✓ Low height, minimal visual impact.
- ✓ Safe maintenance from clean air side.

Specifically suited for use on silos that are pneumatically filled.

The SiloSafe compact reverse jet tubular cartridge dust collector, available as a venting filter or with an integral fan, was developed specifically for silo and bin venting applications – incorporating Nederman UniClean (patented) cartridge technology for maximum cleaning efficiency and extended life.


Typical applications for the SiloSafe filter are venting of pneumatically and continuously filled silos and bins, for cement batching and in distribution facilities.

## SiloSafe Filter


|                                           |                             |
|-------------------------------------------|-----------------------------|
| Certifications                            | CE, EX                      |
| Installation                              | Intérieur, Extérieur        |
| Convient pour les poussières combustibles | True                        |
| Méthode de décolmatage                    | [CompressedAir]             |
| [ProductApplication]                      | Abrasif, Poussière, Granulé |
| Fréquence (Hz)                            | 50 / 60                     |
| Type de filtre                            | Filtre à cartouche          |
| Nombre d'éléments filtrants               | 6                           |

Models

|                                                                                   | Item number  | Tension (V) | Nombre de phases | Poids (kg) | Puissance (kW) |
|-----------------------------------------------------------------------------------|--------------|-------------|------------------|------------|----------------|
|  | SiloSafe 24  | 220         | 1                | 210        |                |
|  | SiloSafe 24F | 380 / 415   | 3                | 245        | 2,2            |

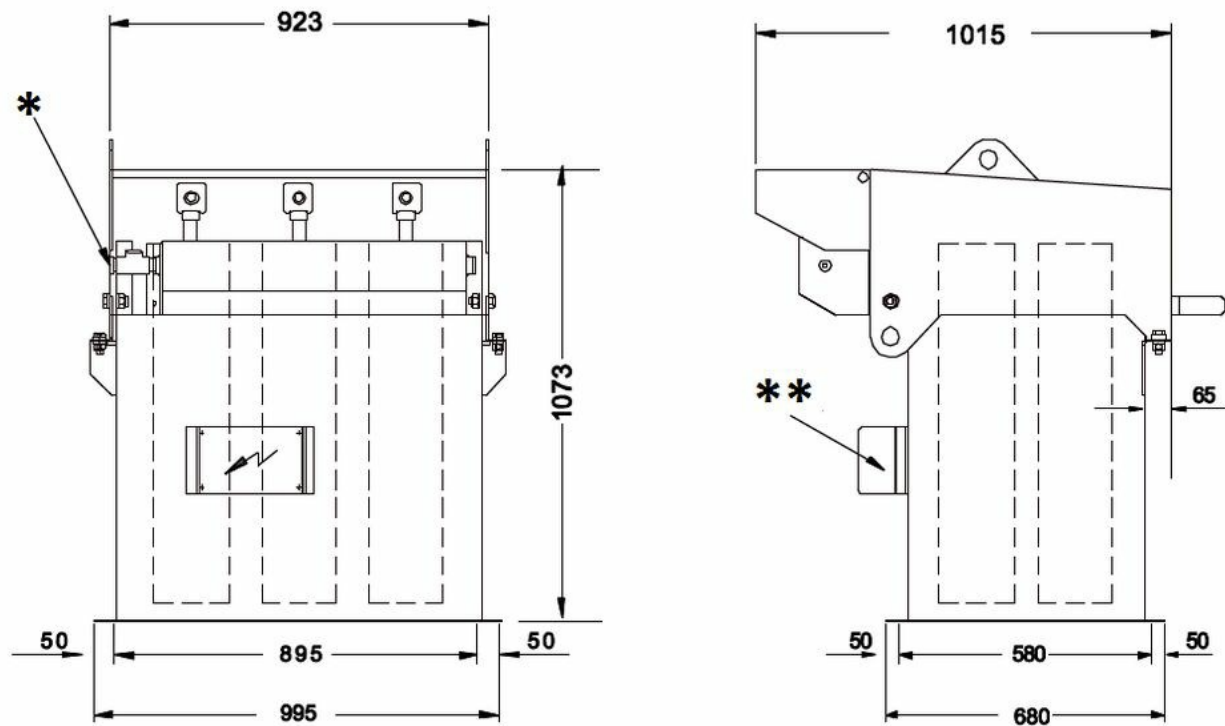

\* 3/4" BSP Female connection for Air supply. \*\* Controller with IP65 enclosure & local isolator requiring 110V or 220 V supply

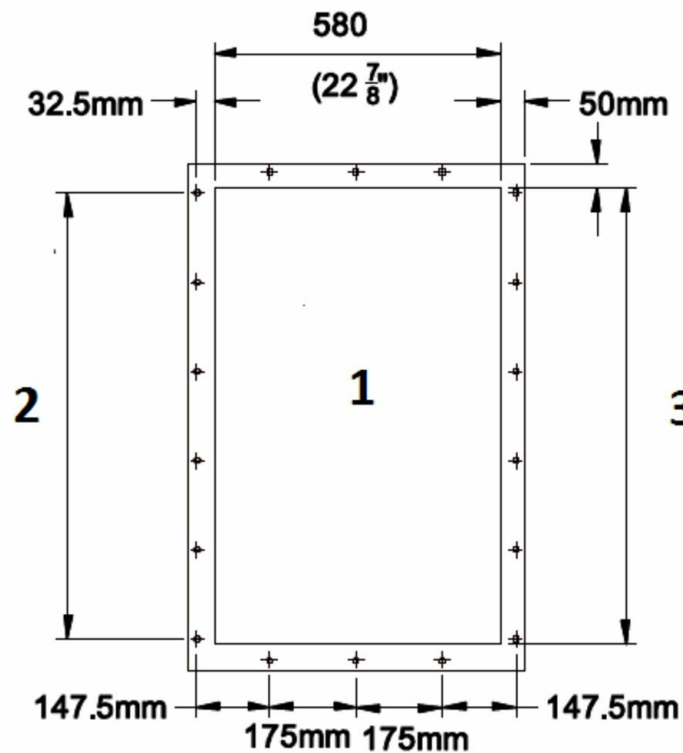

Filter mating Flange details: 1. 18 Holes 12 dia. 2. 5 pitches at 175 mm 3. I / Flange

