ข้อมูลผลิตภัณฑ์

L-PAK 150 Advanced

A compact stationary high vacuum unit with high filter efficiency and enhanced flexibility and advanced features

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

L-PAK 150 Advanced

- Easy to install
- Low noise level
- Low running and maintenance costs

The Nederman L-PAK offers the ideal solution for removing dust and fumes in all types of industries. Typical areas of applications can be found in welding shops, car body shops, construction industries, bakeries, industrial laundries, etc. The L-PAK is also perfect for cleaning of the workplace and the workshop floor. The L-PAK is easy to position and move due to its compact design, its low weight and the frame for fork lift handling. The integrated PLC-control ensure high functionality and can easily be updated with new functions. The automatic start/stop will save energy as well as extend the lifetime of the unit. The remote start/stop function makes it easy to ensure that everything is shut off when you go home from work.

Safe use
The duty idling and the temperature control functions reduce the risk of the fan getting overheated. There is also an indicator to show when service is required.

Unique and economic filter concept
The filter concept in L-PAK is unique as it combines high filter efficiency with long lifetime. A dynamic reducer separates coarse particles. Fine particles are separated on surface treated filter for a long lifetime. The PTFE fine filter is standard in the Advanced model but can easily be replaced by an antistatic filter if needed. You may also add a micro filter to filtrate even the finest particles.

Automatic filter cleaning as standard.
Continuous high performance is obtained by automatic filter cleaning (as standard). L-PAK uses filter cleaning by a short blast of reversed atmospheric air. By the rapid opening of a valve located on top of the filters, a powerful air pulse is created, efficiently dislodging dust from the filter socks.

Complete and ready to use
We can deliver complete installations but if you prefer to install your own system, this is very easy to do. Nederman can also offer a vast range of accessories like cleaning equipment, vacuum valves, swing arms and grinding tools with integrated fume and dust extraction.

The L-PAK Advanced models offers extra features such as improved sound insultation and enhanced functions in the PLC/control system that can handle extra external signals (DPS, BLI, pilot signal etc), adjustable cleaning cycle, start / stop timer functions etc.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

L-PAK 150 Advanced

[ProductCertifications]	CE
[ProductStandards]	Designed for ISO 21904 compliance
[ProductInstallation]	ในอาคาร
[ProductFiltercleaningMethod]	เป่าอากาศแบบไหลย้อน
[ProductApplication]	กรวด, ฝุ่น, ควัน, เศษ, เมล็ด
[ItemPowerVoltage]	400
[ItemFrequency]	50
[ItemNoofphases]	3
[ItemFilterType]	ไส้กรองใช้สำหรับกรองของเหลวทีอยู่ในระบบท่อซึงมีความดันสูงมาก
[ItemNbrofFilterElements]	1
[ItemMaxAirFlow]	290
[ItemCapacityMax]	150 @ -15 kPa
[ItemMaxVaccum]	-22
[ItemWeight]	110
[ItemPower]	3

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

รุ่น

	เลขที่สินค้า
	40051960

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

อุปกรณ์เสริม

	อุปกรณ์เสริม	เลขที่สินค้า
	Microfilter D=140 x 350	40114110
	Filter pack P30/L-PAK150 PTFE	40119422
	ฝาครอบป้องกันทางออกของระบบไอเสีย ขนาด 100 มม. (3.94 นิ้ว) เพื่อป้องกันนกและสัตว์ขนาดเล็กอื่น ๆ จากการเข้าไปในระบบไอเสีย	40130220
	ช่องระบายอากาศโค้ง 90 องศา ขนาด 100 มม. (3.94 นิ้ว) แนะนำสำหรับระบบไอเสีย เพื่อปรับทิศทางการไหลของอากาศและป้องกันสิ่งแปลกปลอมไม่ให้เข้าไปในช่องรับอากาศ	40130820
	ตัวกรองอากาศอัดแบบอินไลน์จับน้ำมัน น้ำ และอนุภาคแข็งในอากาศที่เข้า ช่วยป้องกันไม่ให้วาล์วและส่วนประกอบที่ละเอียดอื่นๆ ถูกอุดตันหรือเสียหาย โดยเฉพาะในสภาพแวดล้อมที่มาตรฐานคุณภาพอากาศอัดอาจแตกต่างกัน	40620360
	ชุดติดตั้งไฟฟ้าที่มีกล่องสัญญาณนำร่อง ช่วยให้สามารถเชื่อมต่อและแยกสาขาของสวิตช์ไมโครหลายตัวจากสายไฟหลักได้	40903520

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

The plastic bin liner is easy to change

mm (in)

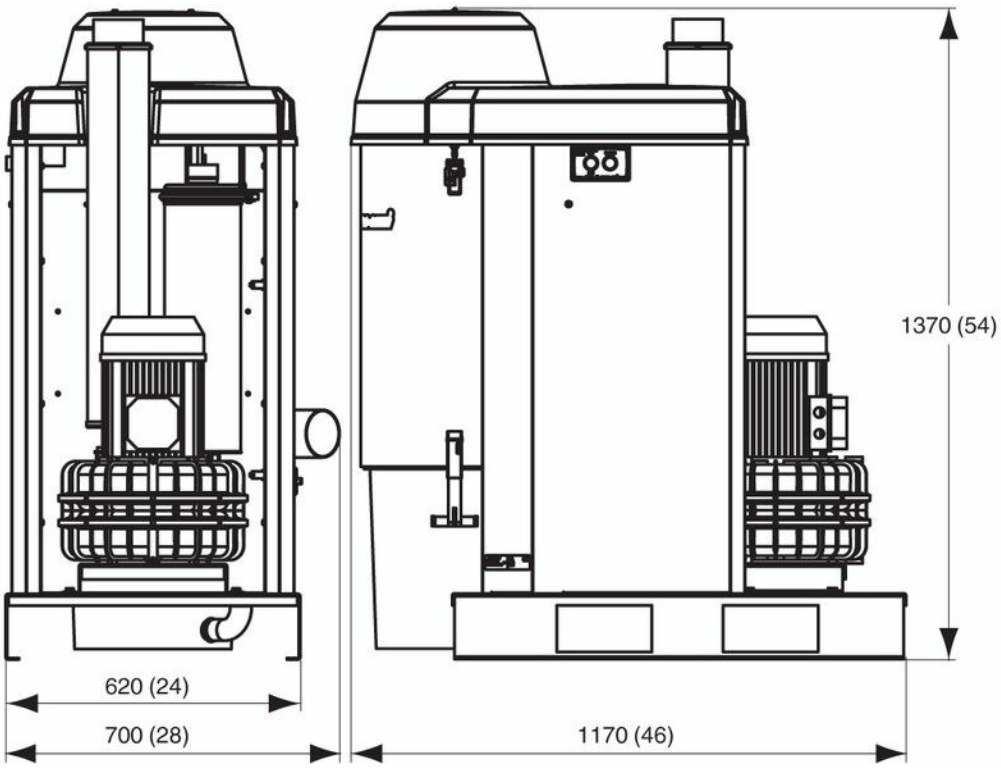

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

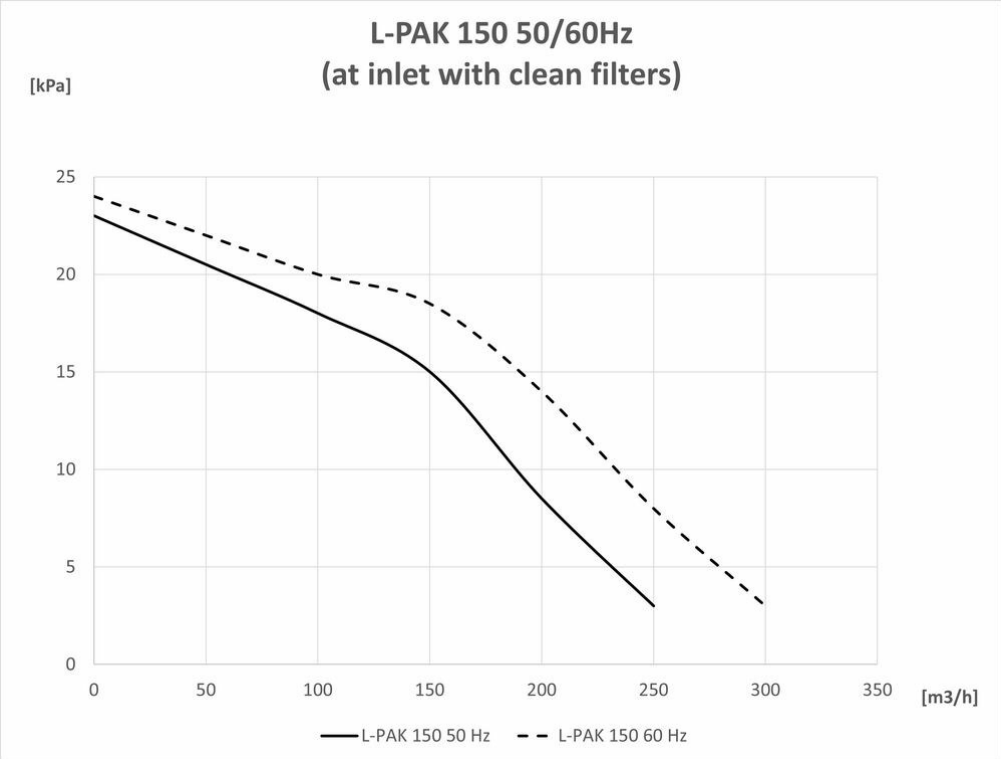

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB