

570A

Draagbare stofafzuiger voor het afzuigen van granulaat



- ✓ Silosysteem met grote wielen
- ✓ Heftrucksleuven
- ✓ Zelfreinigende NCF-filter

De 570A is een draagbare stofafzuiger en heeft een hoog zuigvermogen. Een droge stofzuiger ontworpen voor de opvang van stoffige materialen en granulaat, zoals staalgruis, zand grove poeders en andere stoffige materialen. Dit is een krachtige stofafzuiger, een uitstekende hoogvacuüm afzuiging over grote horizontale en verticale afstand.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-01-16

2/6

Nederman

570A

570A

Certificeringen	CE
Installatie	Buiten, Binnen
Filter reinigingsmethode	perslucht retour
Applicatie	Stof, Granulaten, Grit
Filtertype	Kaars filter

Aantal filterelementen	70
Gewicht (kg)	203

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB






2026-01-16

3/6

Nederman

570A

Models

	Item number	Slangtype	Persluchtsbehoefte	[ItemMaxAirFlow]	[ItemNoiselevel]	Max. vacuüm	[ItemHVBHoseLength]	[ItemHVBHoseDiameter]
	42157011 ^[1]	PU12	5,3 Nm ³ /min	318	75.0	-78	20	63
	42157047 ^[1]	PU12	4,3 Nm ³ /min	690	78.0	-48	20	63
	42157049 ^[1]	PU12	8,6 Nm ³ /min	660	78.0	-68	10	63
	42157086 ^[1]	[W]	8,6 Nm ³ /min	660	78.0	-68		
	42157087 ^[1]	PU12	4,3 Nm ³ /min	330	77.0	-68	20	63

Item number	Slangtype	Persluchtsbehoefte	[ItemMaxAirFlow]	[ItemNoiselevel]	Max. vacuüm	[ItemHWHoseLength]	[ItemHWHoseDiameter]
-------------	-----------	--------------------	------------------	------------------	-------------	--------------------	----------------------

^[1] With floor cleaning equipment

Hose types

Slang type	Specificaties	Temperatuurbereik, °C	Slangkoppelingen einde werkslang	Slangkoppelingen einde koppelslang	Slangaansluiting op de haspel, werkslang	Slangaansluiting op de haspel, koppelslang
PU12	Geschikt voor abrasief materiaal Transparant polyurethaan Verstevigd met verzonken stalen spiraal	- 40 deg. C. - + 90 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB




2026-01-16


4/6

Nederman

570A

Accessories

	Accessory	Item number
	Control S for NE 22-76	43220001
	Control S for NE 22-76, wo/control box	43220026
	Control S for NE86-96, wo/control box	43222008

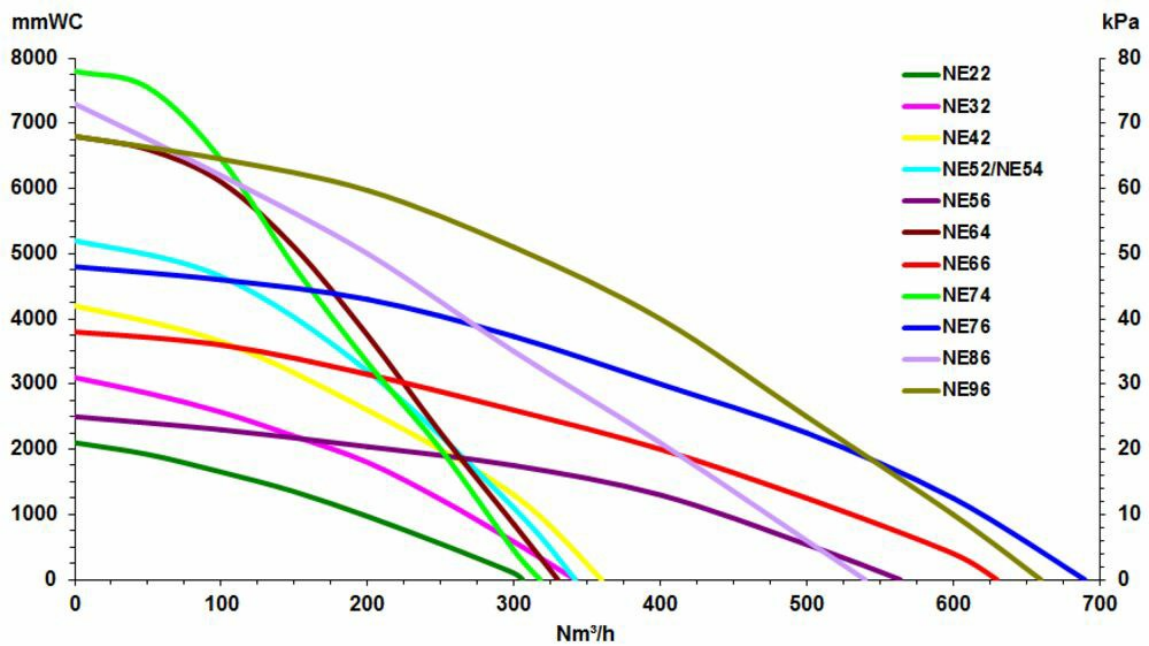

Air Powered ejectors All performance data are based on 7 bar supply pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2026-01-16

6/6