


# TECHNICAL DATA SHEET: QUICK-FIT (QF) SLIP DUCT (includes O-ring and QF Clip)

	Ø mm	O/D mm	I/D mm	Rolled Edge (nom. mm)	Length (nom. mm)	Weight kg	Steel Thickness mm
Laser Welded Seam	080	81	80	6	278	0,5	0,7
	100	101	100	6	278	0,6	0,7
	125	127	126	6	278	0,7	0,7
	140	142	141	6	278	0,8	0,7
	150	151	150	6	278	0,9	0,7
	160	162	161	6	278	0,9	0,7
	180	182	181	8	271	1,0	0,7
	200	204	203	8	271	1,2	0,7
	224	228	227	8	271	1,3	0,7
	250	253	252	8	271	1,4	0,7
	300	301	300	10	262	1,7	0,7
	315	317	316	10	262	1,8	0,7
	350	352	351	10	262	2,0	0,7
	400	402	400	10	262	2,9	0,9
Folded Seam	450	452	450	10	262	3,3	0,9
	500	502	500	10	262	3,7	0,9
	560	562	560	10	262	4,1	0,9
	630	632	630	10	262	4,6	0,9
	710	712	710	10	262	5,2	0,9



The item includes:  
1 pcs Slipduct  
1 pcs Rubber O-ring  
1 pcs QF-clip standard

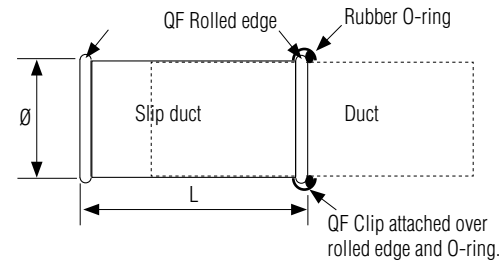

### Construction:

**Longitudinal seam type:** Laser or plasma welded.

**Ends:** QF (Quick-Fit rolled edge)

### Additional Notes

At temperatures ranging between 200° C and 250° C, the zinc-iron alloy layers in galvanised steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is +80° C.

### Compliance / Rating of Product Components

Product	Material	Compliance / Rating
Quick-Fit (QF) Slip Duct	Galvanised	DX51D with Z275 Coating
Quick-Fit (QF) Clip	Galvanised	ASTM A527 with a G-90 rating
Joka Seal Metal Sealant 2315	Aceton Blend	AAMA Specification 801.1
O-ring (6mm)	EPDM	Shore 60

### Temperature Rating of Product Components

	Quick-Fit (QF) Slip Duct & Clip	Sealant	O-ring
180°C	Galvanised Steel	Joka Seal Metal Sealant 2315	EPDM
121°C			
80°C			
-20°C			

