

Producto leaflet

Fan N29



Fan N29

- ✓ Compact
- ✓ Easy to use

A centrifugal fan mainly designed for use with Nederman extraction products.

The fan must not be used in an environment where there is a danger of explosion or for transport of flammable or explosive gases

Fan N29


[ProductCertifications]	[ce]
[ProductInstallation]	Interior, Exterior
[ProductSuitableForCombustableDust]	False
[ProductAmbienTemperatureRange]	-20 to +40 C (-4 F to 104 F)
[ItemFrequency]	60
[ItemNoofphases]	3
[ItemWeight]	32
[ItemPower]	2,2

Modelos

	No. De Artículo	[ItemPowerVoltage]	[ItemAmperage]
	14510229 ^[1]	220/460	7,3/4,6
	14522129 ^[1]	575	3,2


^[1] With fan bracket

Accesorios


	Accesorio	No. De Artículo
	Connector 3"-3". (75mm).	14503626
	Reducer. diam.125/100mm.	14341077
	Reducer. diam.125/75mm. black.	14341080
	Connector 4"-4". (100mm).	14504626
	Connector 5"-5". (125mm).	14505626
	Connector 6"-6". (150mm).	14506626
	Adapter diam.=160mm.	14510326
	Reducer inside diam=160mm. outside	14510426
	Reducer inside diam=160mm. outside	14510526
	Reducer inside diam=160mm. outside	14510626
	Split intake(t-tube).	14510726
	Adapter. diam 160/150mm.	14511226
	Adapter diam=160mm	14511326

Accesorios

	Accesorio	No. De Artículo
	Nozzle, silumin. with magnet.	14500226
	Nozzle, plastic. with magnet.	14501226
	Double adapter, diam.125mm/2x125mm.	14500726
	Double adapter, diam.125mm/2x75mm.	14500826
	Foot stand for fan 529.	14321745

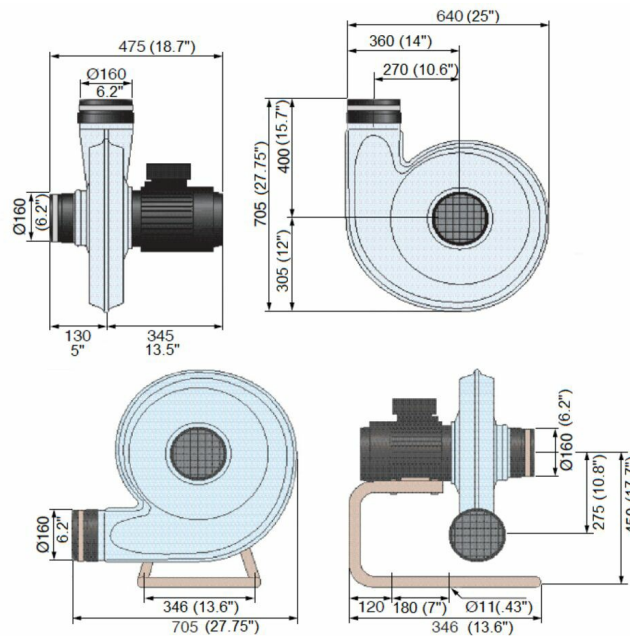

N29 fan, version with and without stand

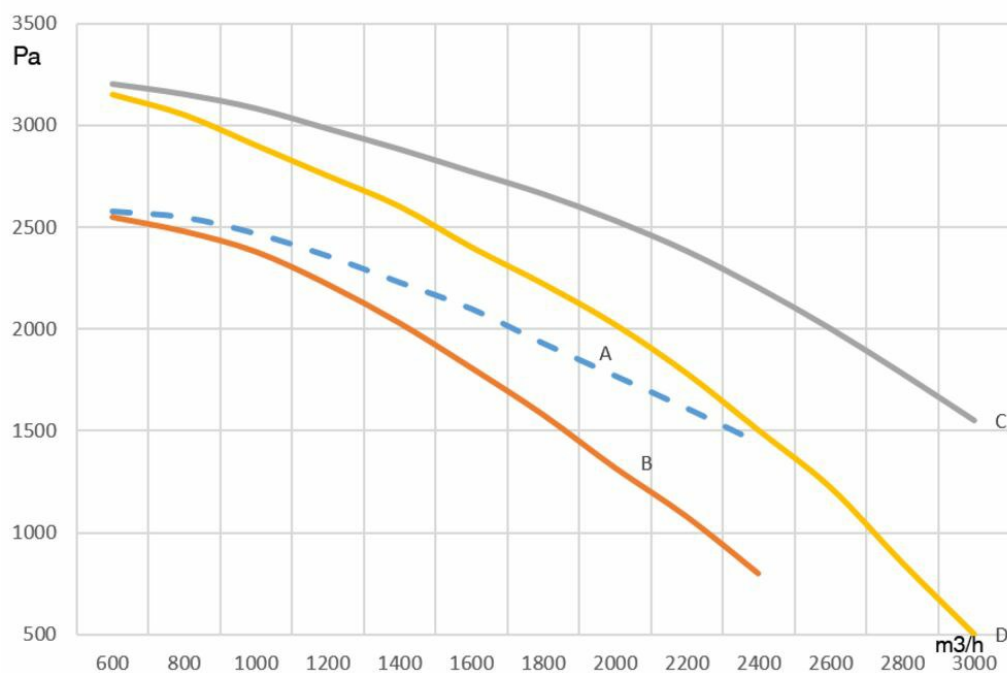

A = Fan total pressure (1,5 kW) B = Fan static pressure (1,5 kW) C = Fan total pressure (2,2 kW) D = Fan static pressure (2,2 kW)