

Industrial vacuum cleaner 426 A

Vacuum for extraction of dry waste and powders



Industrial vacuum cleaner 426 A

- ✓ Pre-separation in silo
- ✓ Manual filter cleaning prolongs the filter's lifetime
- ✓ Forklift handling

Industrial dry vacuum cleaner 426A is designed for removal and collection of industrial waste and spillage. This powerful dry vacuum suction unit comes equipped with a silo and cyclonic pre-separator before the filter, ensuring efficient collection of large quantities of material. The 426A Industrial vacuum can also be equipped with a HEPA filter for finer particles. The industrial vacuum cleaner includes slots for handling by forklift. Special swiveling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially easy. The dry vacuum's cyclonic silo is equipped with a manual valve

Industrial vacuum cleaner 426 A

Certifications	CE
Installation	Outdoor, Indoor
Filter cleaning method	Reverse air pulse
Application	Dust, Granulate, Grit, Swarf
Dustbin volume (l)	58 l cyclonic silo + 47 l dust bin
[ProductHoseLength]	7.5
Filter Area (m²)	1,56
Filter type	[cartridge]
Number of filter elements	1
Filter material	Microfibre
Weight (kg)	119
[ItemHoseLength]	7,5
[ItemHoseDiameter]	51
Note	Manual discharge valve

Models

	Item no	Type of hose	Compressed air requirement	[ItemMaxAirFlow]	[ItemNoiselevel]	[ItemMaxVaccum]
	42142602 ^[1]	PVC	2,2 Nm ³ /min	360	73,5	-42
	42142600 ^[1]	PVC	3,0 Nm ³ /min	342	75,5	-52
	42142606 ^[1]	PVC	3,0 Nm ³ /min	342	75,5	-52
	42142601 ^[1]	PE/C	5,3 Nm ³ /min	318	75.0	-78


^[1] Manual discharge valve

Hose types

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PVC	Max vacuum 84 kPa Inner bending radius 60 mm Reinforced with inbedded steel helix	- 20 deg. C. to + 70 Deg. C.				
PEC	For cleaning applications Max vacuum 50 kPa Conductivity < 10 ⁶ Ohm	-40°C - +60°C				

Accessories

	Accessory	Item no
	Control Sfor NE 22-76	43220001
	Control Sfor NE 22-76	43220026
	Control Sfor NE86-96	43222008
	Plastic bag S50 - 25pcs w/hole	43650102
	Plastic bag S50 - 25pcs 630x800 w/h	43650103

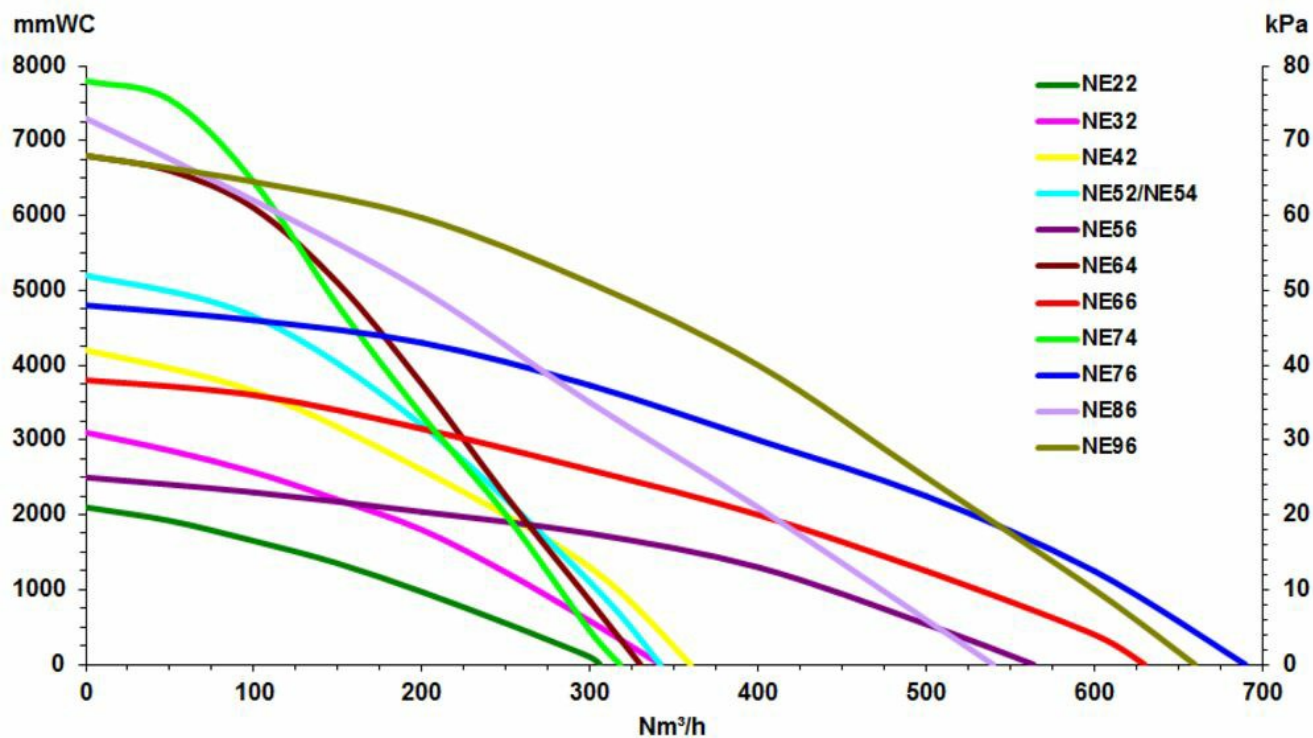

Air Powered ejectors All performance data are based on 7 bar supply pressure