Product leaflet

Magna Track HS

Uitlaatgasafzuiging voor hulpposten met hoge frequentie / hoge snelheid runs

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Magna Track HS

- Capacity: 1 vehicle per system
- Exhaust pipes: High level or Low level tail pipes
- High exit speed: up to 25 km/h; 15 mp
- For reverse-in (or drive-through)
- Optional automatic start/stop device that offers: - Practical control of fan start/stop - Safe control of air quality (source ventilation automatically starts when vehicle engine starts) - Simple programming - Approval for radio equipment acc. to EC directives, FCC (USA) and IC (Canada)

De MagnaTrack HS is ontworpen om hulpposten te bedienen met een hoge frequentie van runs. Het baansysteem dient voor een voertuig tegelijk. De stabilisator heeft een constant hefvermogen. MagnaTrack HS is beschikbaar in lengten van 3,5 tot 18 m: (10 tot 60 ft) en past op voertuigen met laag en hoog gemonteerde uitlaatpijpen.
Capaciteit: 1 voertuig per systeem
Uitlaatpijpen: Hoge of lage uitlaatpijpen
Hoge uitgangssnelheid tot 25 km/h - 15 mph
Voor achteruit (of in beweging)
Optionele automatisch start/stop apparaat dat het volgende biedt:
-Praktische besturing van de ventilator start/stop
-Veilige besturing van luchtkwaliteit (bronventilatie start automatisch wanneer de motor van het voertuig start)
-Eenvoudige programmering
- Goedkeuring voor radio-apparatuur volgens EC-richtlijnen, FCC (VS) en IC (Canada)

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Magna Track HS

Certificeringen	CE

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item number	Slangdiameter (m)	Slanglengte (m)
	20804164[1]	160	
	20804264[1]	160	
	20804364[1]	160	
	20804464[1]	160	
	20804564[1]	160	
	20804664[1]	160	
	20806864[1]	160	
	20801564[2]	130	3
	20801664[2]	130	4
	20801764[2]	160	3
	20801864[2]	160	4
	20801964	160	2

[1] Including - Guide Track (1), Mounting brackets for 2.4 m distance (2), Shock absorber (3), Horizontal hose (4), Transformer (12)
[2] Including - Trolley (5), Balancer (6), Vertical hose (7), Electro-magnet assembly (9), Anchor plate (10), Disconnection box (11)

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item number
	MagnaSystem Nozzle STD	20802164
	MagnaSystem Nozzle HB 600	20802264
	MagnaSystem Nozzle HB 600	20802364
	MagnaSystem Nozzle HB 900	20802464
	Scoop Nozzle HB 600 5" Magna system	20814263
	Scoop Nozzle HB 6" 600 Magna system	20814463
	Radio transmitter vehicle GHz	20376723
	Radio Receiver GHz	20376724
	Handheld radio transmitter GHz	20376725
	Program kit for radio system	20376726
	Hose protection ø130/160 (Pair)	20374428
	Anchor plate, shutter, in 3 parts	20371868
	Twist support, HL nozzle	20374364

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item number
	Lengthening shaft, HL nozzle	20374359

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

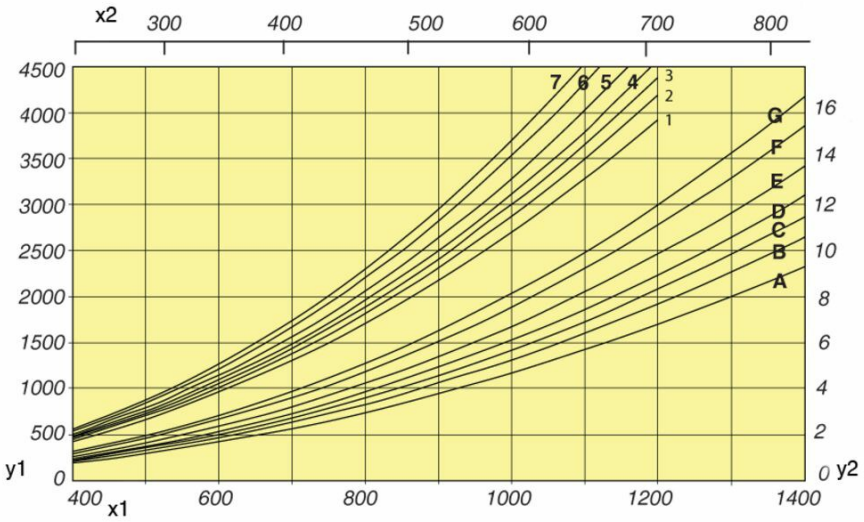

Ø 130	Ø 160	m / ft
1	A	3.5 / 11.5
2	B	5.9 / 19.4
3	C	7 / 22.9
4	D	9.5 / 31.2
5	E	11.8 / 38.7
6	F	15.3 / 50.2
7	G	17.7 / 58.0

y1: Pa, x1: m3/h, x2: CFM y2: W.C

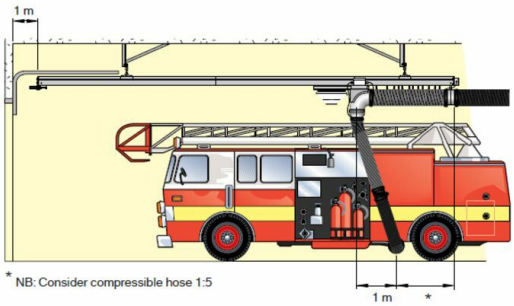

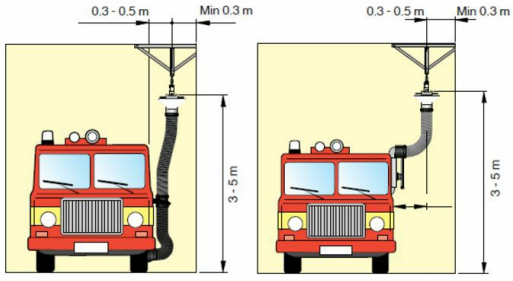

Lenght of rail, m	No. of brackets
3.5	2
5.9	3
7	4
9.5	4
11.8	5
15.3	7
17.7	9

N.B. The nozzle for high level (HL) exhaust pipes must be installed at a higher level than the exhaust pipe. The nozzle must be pulled downwards at connection, which will activate the balancer.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

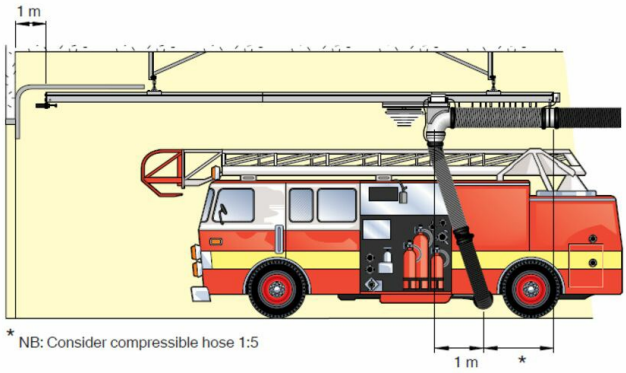



Lenght of rail, m / ft	No. of brackets
5.9 / 19.4	3
7 / 22.9	4
9.5 / 31.2	4
11.8 / 38.7	5

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB