Product leaflet

Industrial vacuum cleaner 570 A

portable dust collector for granulate extraction

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Industrial vacuum cleaner 570 A

- Silo system with large wheels
- Forklift slots
- Self-cleaning NCF filter

The 570A portable dust collector has high suction capacity. A dry vacuum designed for the collection of dusty materials and granules, such as steel grit, sand, coarse powders and other dusty materials. This is a powerful dust collector, excellent high vacuum for suction over long horizontal and vertical distance.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Industrial vacuum cleaner 570 A

Certifications	CE
Installation	Outdoor, Indoor
Filter cleaning method	Reverse air pulse

Application	Dust, Granulate, Grit
Dustbin volume (l)	146
Filter Area (m²)	3,15 or 5,25 depending on model (NCF) 0,59 (bag)
Filter type	[NCF]
Number of filter elements	70
Weight (kg)	203
Note	With floor cleaning equipment

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item no	Filter material	Type of hose	Compressed air requirement	[ItemMaxAirFlow]	[ItemNoiselevel]	[ItemMaxVaccum]	[ItemHVHoseLength]	[ItemHVHoseDiameter]
	42157011[1]	Vyon 3,15 m2	PU12	5,3 Nm3/min	318	75.0	-78	20	63
	42157047[1]	Vyon 3,15 m2	PU12	4,3 Nm³/min	690	78.0	-48	20	63
	42157049[1]	Vyon 3,15 m2	PU12	8,6 Nm3/min	660	78.0	-68	10	63

	Item no	Filter material	Type of hose	Compressed air requirement	[ItemMaxAirFlow]	[ItemNoiselevel]	[ItemMaxVaccum]	[ItemHVHoseLength]	[ItemHVHoseDiameter]
	42157086[1]	Vyon 5,25 m2	[W]	8,6 Nm³/min	660	78.0	-68		
	42157087[1]	Vyon 3,15 m2	PU12	4,3 Nm3/min	330	77.0	-68	20	63

[1] With floor cleaning equipment

Hose types

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PU12	Suitable for abrasive material Transparent polyurethane Reinforced with inbedded steel helix	- 40 deg. C. -+ 90 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item no
	Control Sfor NE 22-76	43220001
	Control Sfor NE 22-76	43220026
	Control Sfor NE86-96	43222008

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

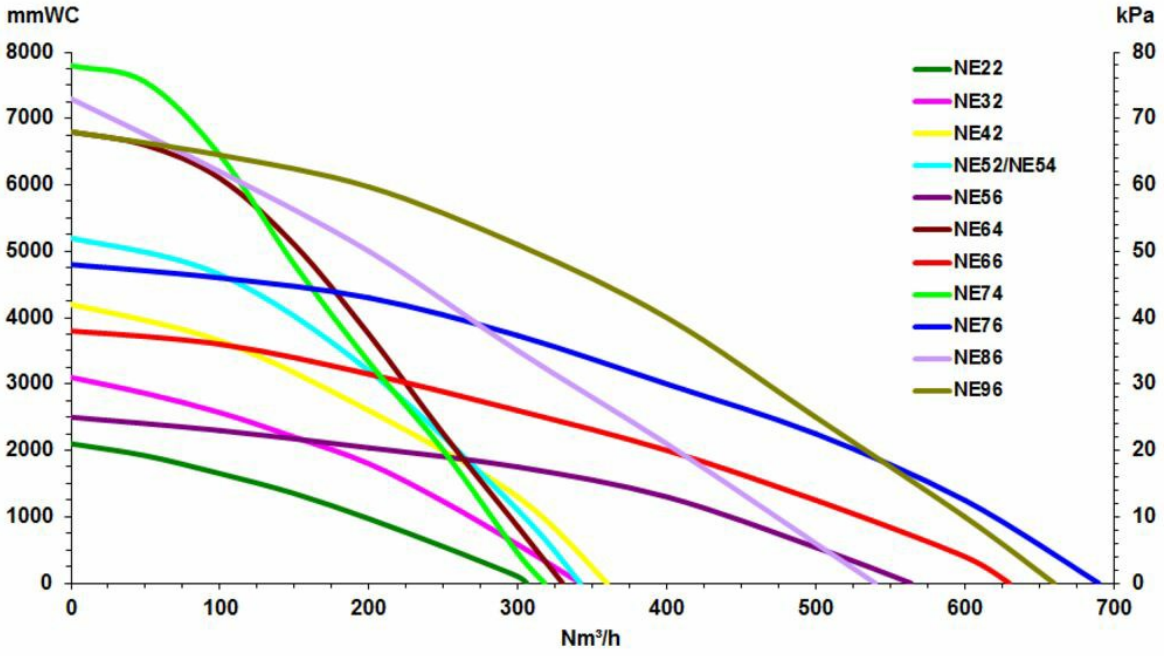

Air Powered ejectors All performance data are based on 7 bar supply pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB