

OMF 1000 FC

FibreDrain® oil mist collector for continuous operation.



OMF 1000 FC

- ✓ Three filter stages
- ✓ Gauges for reading of pressure drop over each filter stage
- ✓ Compact design
- ✓ Two (2) Ø150mm inlet locations, one blanked using clamp ring connection.
- ✓ Starter and motor protection included

Nederman OMF oil mist eliminators are designed to handle large amounts of emulsion mist during continuous operation. They are developed with focus on high efficient filtration together with low maintenance cost.

Nederman OMF 1000 FC has as standard 3 filter-stages where the first 2 stages consists of filter cassettes with Nederman's FibreDrain® technology. Nederman have a wide range of different types of filters to suit many different kind of applications. The third stage consists of a HEPA filter in filter class H13 with an efficiency of 99,95% for MPPS according to EN1822. OMF 1000 FC have an built-in chamber fan.

OMF 1000 FC

Certifications	CE
Standard	2009/125/EC
Noise level (dB(A))	50 Hz: 66 dB(A) @1,5 m from service side 60 Hz: 69 dB(A) @1,5 m from service side
Protection class	IP55
Filter efficiency (%)	99.95
Installation	Indoor
Material	Sheet metal, painted both in- and outside.
Filter cleaning method	Self-Draining
Working pressure (kPa)	Max 2500 Pa
Capacity (max airflow m ³ /h)	1000
[ProductOperatingTemperature]	40 deg C (inbuilt fan)
Power voltage (V)	230/400
Frequency (Hz)	50
No of phases	3
Number of filter elements	3
Amperage (A)	4,2 / 2,4
Colour	NCS-S 1005 B20G
Weight (kg)	150
Power (kW)	1,1
Note	This product is not included in our free of charge carriage offer. For a carriage cost please contact Nederman UK.



Models

	Item no
	12400001 ^[1]

^[1] This product is not included in our free of charge carriage offer. For a carriage cost please contact Nederman UK.

Accessories

	Accessory	Item no
	Drain pump box, 50 Hz	12400054
	Drain container with piping	12400764
	FibreDrain Filter F36 OMF1	12400002
	FibreDrain Filter F36 OMF2	12400003
	Hepa DCM H13 595x595x100	12400004
	Outlet connection OSF 500FC / OMF 1000FC	12400548
	FibreDrain Pumpbox KTF82-200 / 50Hz	12401330
	Frequency inverter with 2 kPa pressure sensor. 1,5kW. IP66 enclosure	73008913

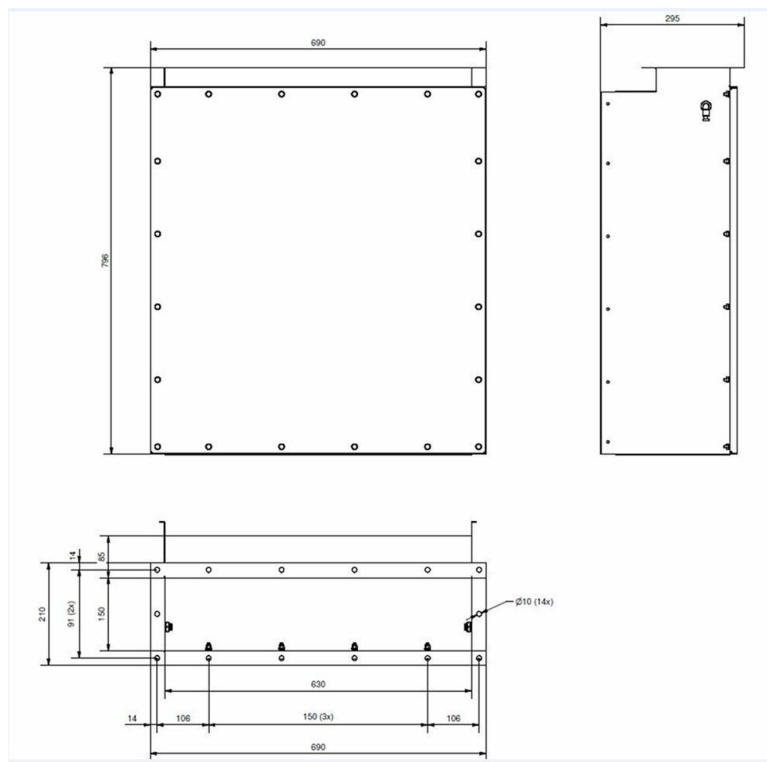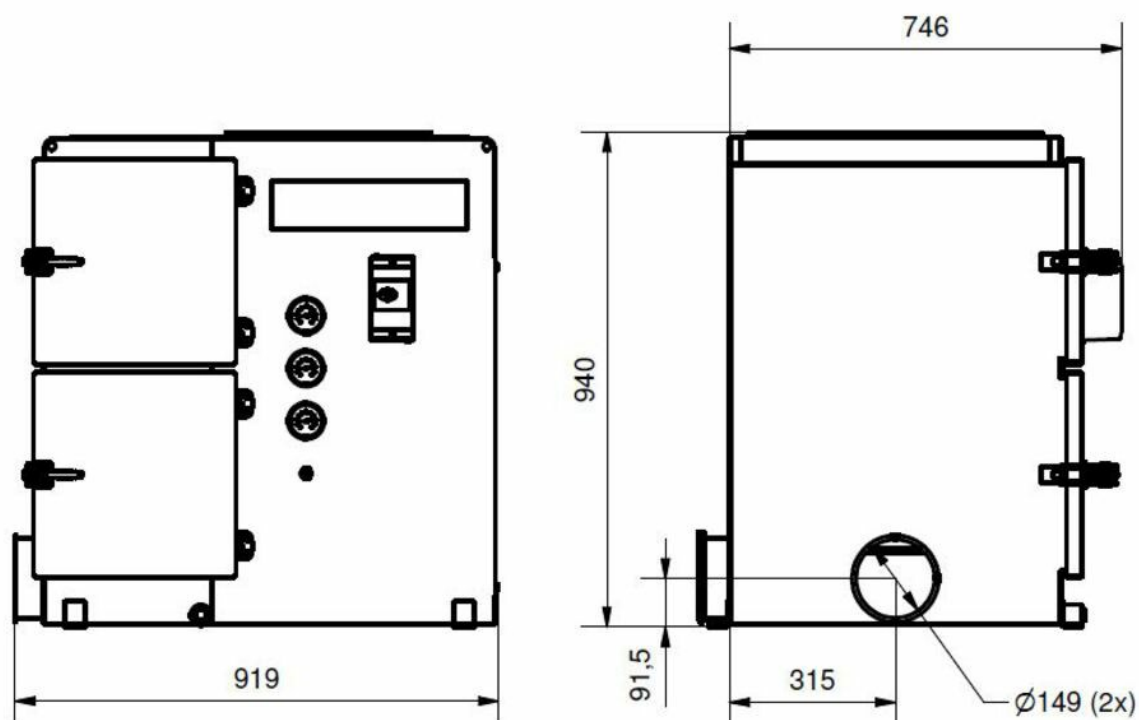

Outlet connection OSF 500FC / OMF 1000FC